

TRIPLE S TECHNOLOGY CO.,LTD

40/1 soi Pattanakarn20 yeak4, Pattanakarn rd,
Suanluang, Suanluang, Bangkok 10250

Tel. 02-318-2386-7

Fax. 02-318-2388

Email : sale@triple-s.co.th



A COLLECTION

2026 V1



A COLLECTION
DOWNLIGHT



A COLLECTION
DOWNLIGHT

A collection of downlights is where style meets efficiency. Achieve perfect illumination with our sleek and modern fixtures, designed for both ambient and targeted lighting. Explore a range of sizes and styles tailored for any setting. Elevate your space with precision and sophistication using our LED downlights.

ARIS AERO AVA AUSTIN AURA ALEX ASTON ANN ARNO



ADJUSTABLE DOWNLIGHT
AYE SERIES

AYE SERIES
ADJUSTABLE DOWNLIGHT



A2-55 ROUND
Trim



A2-55 SQUARE
Trim



A2-75 ROUND
Trim



A2-75 SQUARE
Trim



A2-95 ROUND
Trim



A2-55X2 SQUARE
Trim



A2-75X2 SQUARE
Trim

AYE SERIES

TRIMLESS ADJUSTABLE DOWNLIGHT



A2-55 ROUND
Trimless



A2-55 SQUARE
Trimless



A2-75 ROUND
Trimless



A2-75 SQUARE
Trimless



A2-95 ROUND
Trimless



A2-55X2 SQUARE
Trimless



A2-75X2 SQUARE
Trimless

AYE SERIES

ADJUSTABLE DOWNLIGHT



A2-75 ROUND
Trim Pin hole



A2-75 ROUND
Trimless Pin hole



A2-75 ROUND
Trim Key hole



A2-75 ROUND
Trimless Key hole



A2-75 ROUND
Trim WALL WASHER



A2-75 ROUND
Trimless WALL WASHER

AYE SERIES

LED DOWNLIGHT SYSTEM

A2-55 ROUND

Trim



A2-75 ROUND

Trim








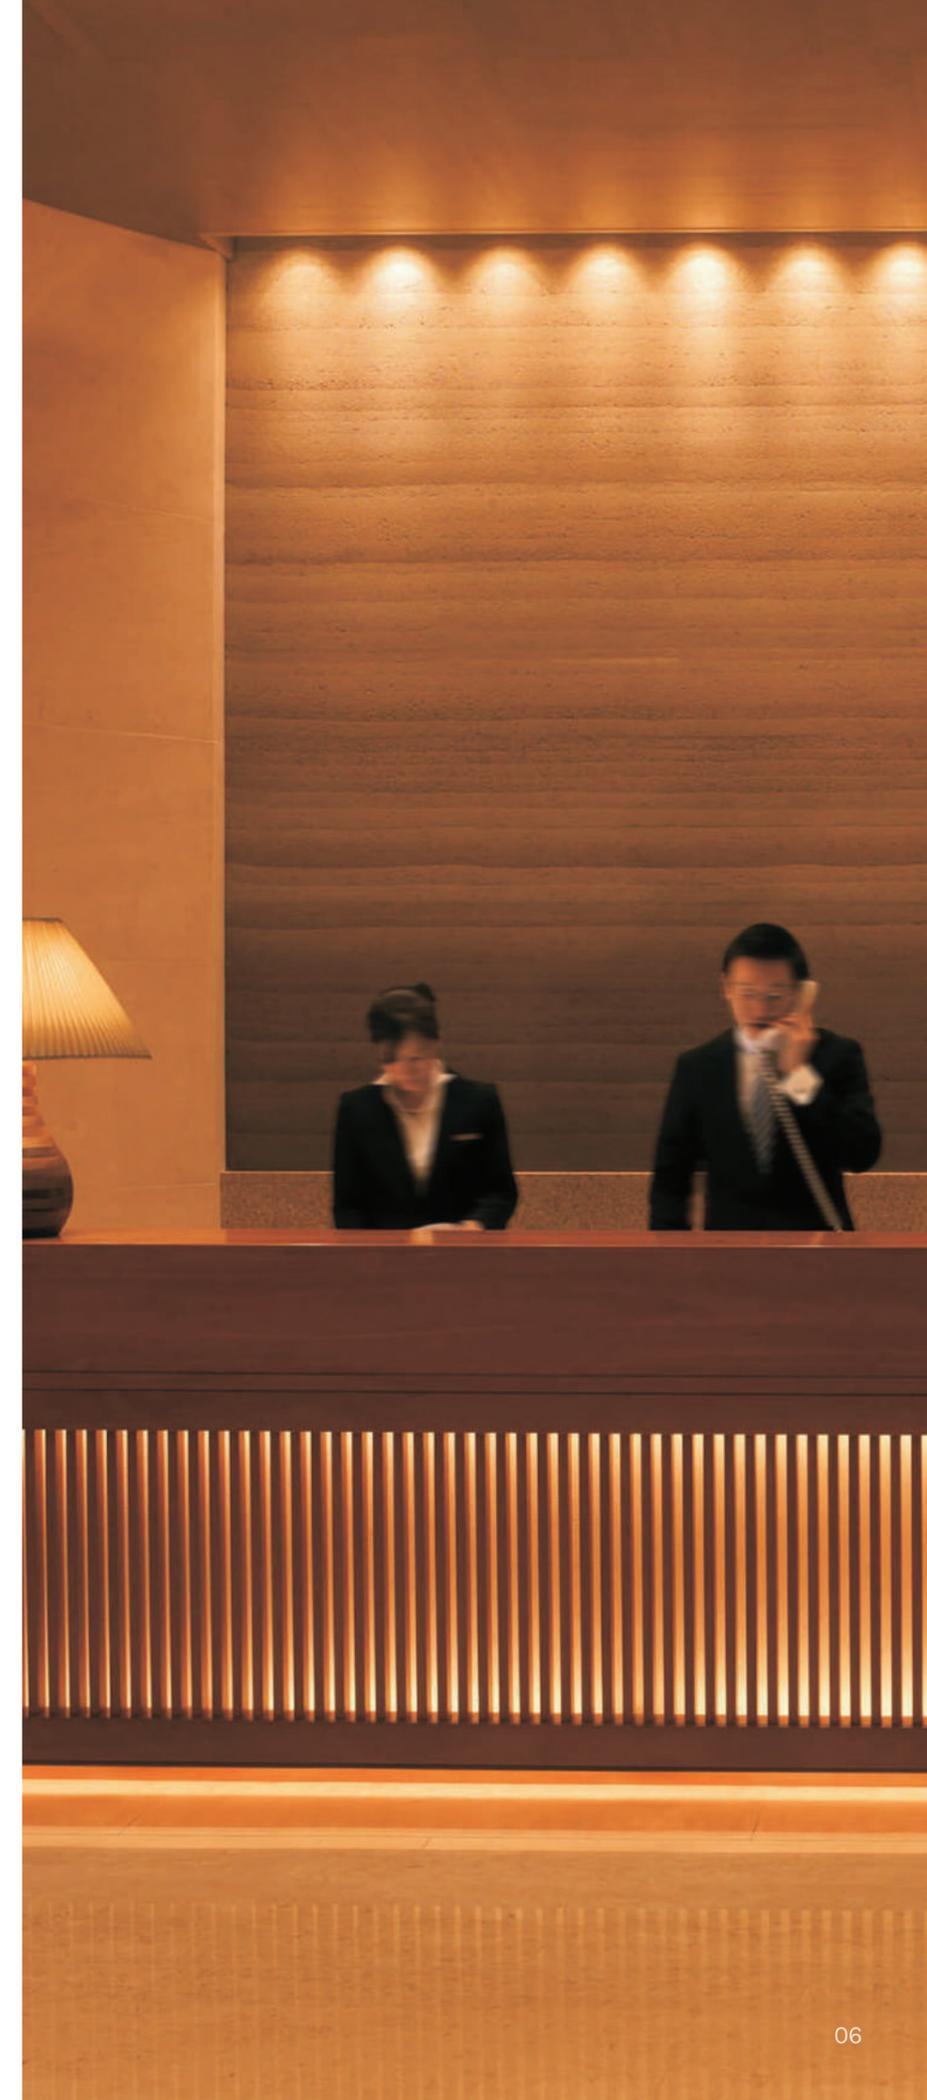
A2-95 ROUND

Trim



ADJUSTABLE DOWNLIGHT

MODEL	A2-55R/A2-55TWR	A2-75R/A2-75TWR	A2-95R/A2-95TWR
DIMENSION (MM)			
CUTOUT (MM)	55	75	95
WATTAGE	5W / 7W / 9W	7W / 10W / 12W / 15W	20W / 25W / 30W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (7W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (25W)
BEAM ANGLE	 15° 24° 36°	 15° 24° 36° 50°	 15° 24° 36° 50°
CRI	>90	>90	>90
LUMEN OUTPUT	420.088 @ 3000K	634.785 @ 3000K	1586.156 @ 3000K
IP	IP20 / IP54	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK BLACK CHROME	 SILVER WHITE BLACK BLACK CHROME	 SILVER WHITE BLACK BLACK CHROME
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS



AYE SERIES
LED DOWNLIGHT SYSTEM

A2-55 ROUND
Trimless



A2-75 ROUND
Trimless



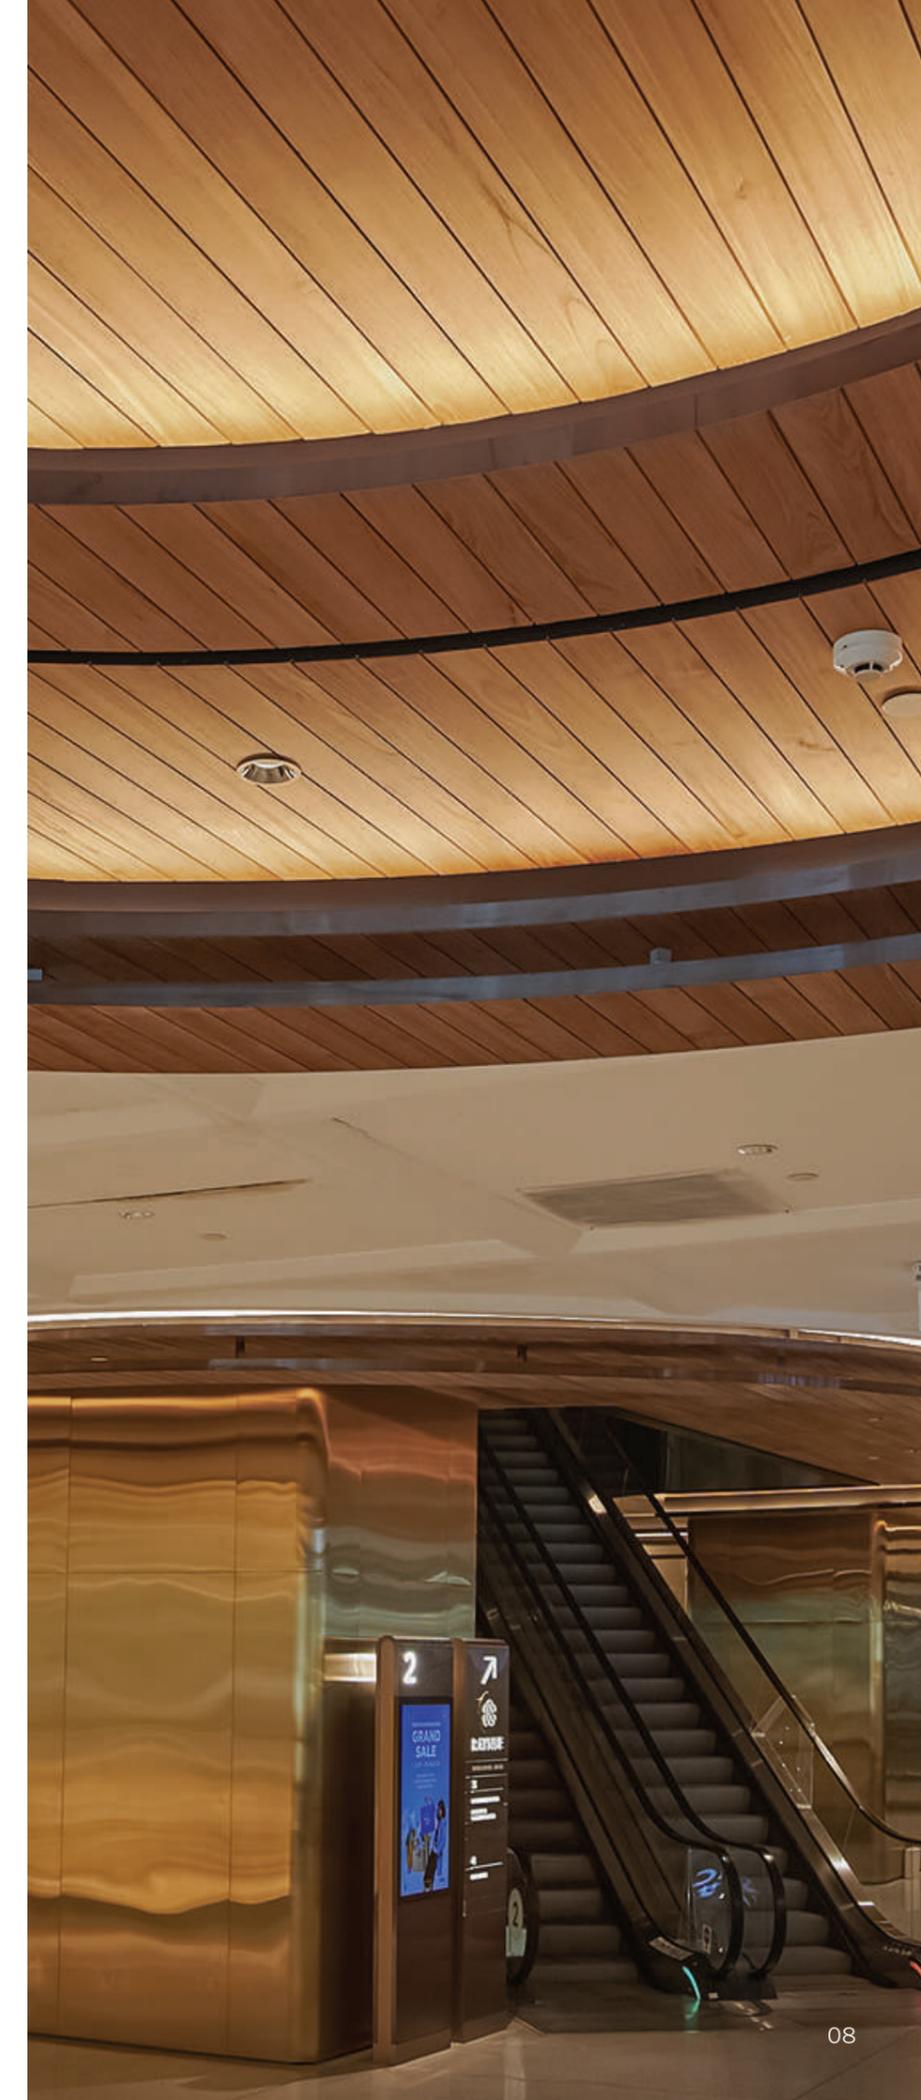
A2-95 ROUND
Trimless



ADJUSTABLE DOWNLIGHT

MODEL	A2-55RT/A2-55TWRT	A2-75RT/A2-75TWRT
DIMENSION (MM)		
CUTOUT (MM)	55	75
WATTAGE	5W / 7W / 9W	7W / 10W / 12W / 15W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (7W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE	15° 24° 36°	15° 24° 36° 50°
CRI	>90	>90
LUMEN OUTPUT	420.088 @ 3000K	634.785 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	SILVER WHITE BLACK Black Chrome	SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS

MODEL	A2-95RT/A2-95TWRT
DIMENSION (MM)	
CUTOUT (MM)	95
WATTAGE	20W / 25W / 30W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (25W)
BEAM ANGLE	15° 24° 36° 50°
CRI	>90
LUMEN OUTPUT	1586.156 @ 3000K
IP	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS



AYE SERIES
LED DOWNLIGHT SYSTEM

A2-55 SQUARE
Trim



A2-75 SQUARE
Trim





A2-55X2 SQUARE
Trim

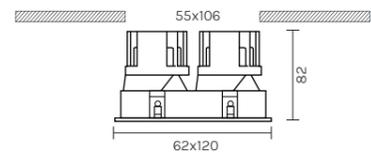
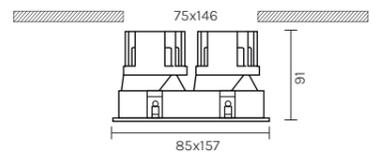


A2-75X2 SQUARE
Trim



ADJUSTABLE DOWNLIGHT

MODEL	A2-55S/A2-55TWS	A2-75S/A2-75TWS
DIMENSION (MM)		
CUTOUT (MM)	55 X 55	75 X 75
WATTAGE	5W / 7W / 9W	7W / 10W / 12W / 15W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700 - 7000 (7W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE	 15° 24° 36°	 15° 24° 36° 50°
CRI	>90	>90
LUMEN OUTPUT	420.088 @ 3000K	634.785 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK Black Chrome	 SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS

MODEL	A2-55X2S/A2-55TWX2S	A2-75X2S/A2-75TWX2S
DIMENSION (MM)		
CUTOUT (MM)	55 X 106	75 X 146
WATTAGE	7WX2 / 9WX2	7WX2 / 10WX2 / 12WX2 / 15WX2
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700 - 7000 (7W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE	 15° 24° 36°	 15° 24° 36° 50°
CRI	>90	>90
LUMEN OUTPUT	420.088 @ 3000K	634.785 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK Black Chrome	 SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS



AYE SERIES
LED DOWNLIGHT SYSTEM


A2-55 SQUARE
Trimless




A2-75 SQUARE
Trimless





A2-55X2 SQUARE
Trimless





A2-75X2 SQUARE
Trimless



ADJUSTABLE DOWNLIGHT

MODEL	A2-55ST/A2-55TWST	A2-75ST/A2-75TWST
DIMENSION (MM)		
CUTOUT (MM)	55 X 55	75 X 75
WATTAGE	7X2W / 9X2W	7W / 10W / 12W / 15W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700 - 7000 (7W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	420.088 @ 3000K	634.785 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		

MODEL	A2-55X2ST/A2-55TWX2ST	A2-75X2ST/A2-75TWX2ST
DIMENSION (MM)		
CUTOUT (MM)	55 X 106	75 X 146
WATTAGE	5WX2 / 7WX2 / 9WX2	7WX2 / 10WX2 / 12WX2 / 15WX2
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700 - 7000 (7W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	420.088 @ 3000K	634.785 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		



PROJECT - BRIDDERS OPTICAL
LIGHTING DESIGNER - PUNMASTUDIO
PRODUCT - IA SERIES, IN SERIES, IPRO SERIES,
IBIS SERIES, CASAMBI, STRETCHED FABRIC

AYE SERIES

LED DOWNLIGHT SYSTEM

A2-75 ROUND

Trim Pin hole



A2-75 ROUND

Trim Key hole






A2-75 ROUND

Trim WALL WASHER



ADJUSTABLE DOWNLIGHT

MODEL	A2-75RP/A2-75TRWP	A2-75RK/A2-75TRWK
DIMENSION (MM)		
CUTOUT (MM)	75	75
WATTAGE	10W / 12W	10W / 12W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE	 15° 24° 36°	 15° 24° 36°
CRI	>90	>90
LUMEN OUTPUT	672.235 @ 3000K	696.427 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK Black Chrome	 SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS

MODEL	A2-75RW/A2-75TRRW
DIMENSION (MM)	
CUTOUT (MM)	75
WATTAGE	10W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (10W)
BEAM ANGLE	 80°
CRI	>90
LUMEN OUTPUT	463.442 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS



AYE SERIES
LED DOWNLIGHT SYSTEM

A2-75 ROUND
Trimless Pin hole



A2-75 ROUND
Trimless Key hole



A2-75 ROUND
Trimless WALL WASHER



ADJUSTABLE DOWNLIGHT

MODEL	A2-75RTP/A2-75TWRTP	A2-75RTK/A2-75TWRTK
DIMENSION (MM)		
CUTOUT (MM)	75	75
WATTAGE	10W / 12W	10W / 12W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (12W)
BEAM ANGLE	 15° 24° 36°	 15° 24° 36°
CRI	>90	>90
LUMEN OUTPUT	672.235 @ 3000K	696.427 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK Black Chrome	 SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS

MODEL	A2-75RTW/A2-75TWRWT
DIMENSION (MM)	
CUTOUT (MM)	75
WATTAGE	10W
CCT	2700K 3000K 3500K 4000K 5000K 6000K TUNABLE 2700K - 7000K (10W)
BEAM ANGLE	 80°
CRI	>90
LUMEN OUTPUT	463.442 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK Black Chrome
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS





ADJUSTABLE DOWNLIGHT
AERO SERIES

AERO SERIES
ADJUSTABLE DOWNLIGHT



AR55 ROUND
Trim



AR75 SQUARE
Trim



AR75 ROUND
Trim



AR100 SQUARE
Trim



AR100 ROUND
Trim



AR125 SQUARE
Trim



AR125 ROUND
Trim

AERO SERIES

TRIMLESS ADJUSTABLE DOWNLIGHT



AR55 ROUND
Trimless



AR75 SQUARE
Trimless



AR75 ROUND
Trimless



AR100 SQUARE
Trimless



AR100 ROUND
Trimless



AR125 SQUARE
Trimless



AR125 ROUND
Trimless

AERO SERIES

ADJUSTABLE DOWNLIGHT



AR55 ROUND
Pin Hole



AR55 ROUND
Key Hole



AR75 ROUND
Pin Hole



AR75 ROUND
Key Hole

AERO SERIES
LED DOWNLIGHT SYSTEM

AR55 ROUND
Trim



AR75 ROUND
Trim





AR100 ROUND
Trim





AR125 ROUND
Trim



ADJUSTABLE DOWNLIGHT

MODEL	AR55R	AR75R
DIMENSION (MM)		
CUTOUT (MM)	55	75
WATTAGE	7W / 9W	11W / 13W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	TUNABLE 1800 - 4000 / 2700 - 6000 	TUNABLE 1800 - 4000 / 2700 - 6000 
CRI	>90	>90
LUMEN OUTPUT	456 @ 3000K / 570 @ 3000K	773 @ 3000K / 883 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	BLACK
ACCESSORY		
OPTICAL ACCESSORY		

MODEL	AR100R	AR125R
DIMENSION (MM)		
CUTOUT (MM)	100	125
WATTAGE	20W / 25W	28W / 40W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	TUNABLE 1800 - 4000 / 2700 - 6000 	TUNABLE 1800 - 4000 / 2700 - 6000 
CRI	>90	>90
LUMEN OUTPUT	1754 @ 3000K / 2064 @ 3000K	2328 @ 3000K / 3387 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		



AERO SERIES
LED DOWNLIGHT SYSTEM

AR55 ROUND
Trimless



AR75 ROUND
Trimless



AR100 ROUND
Trimless



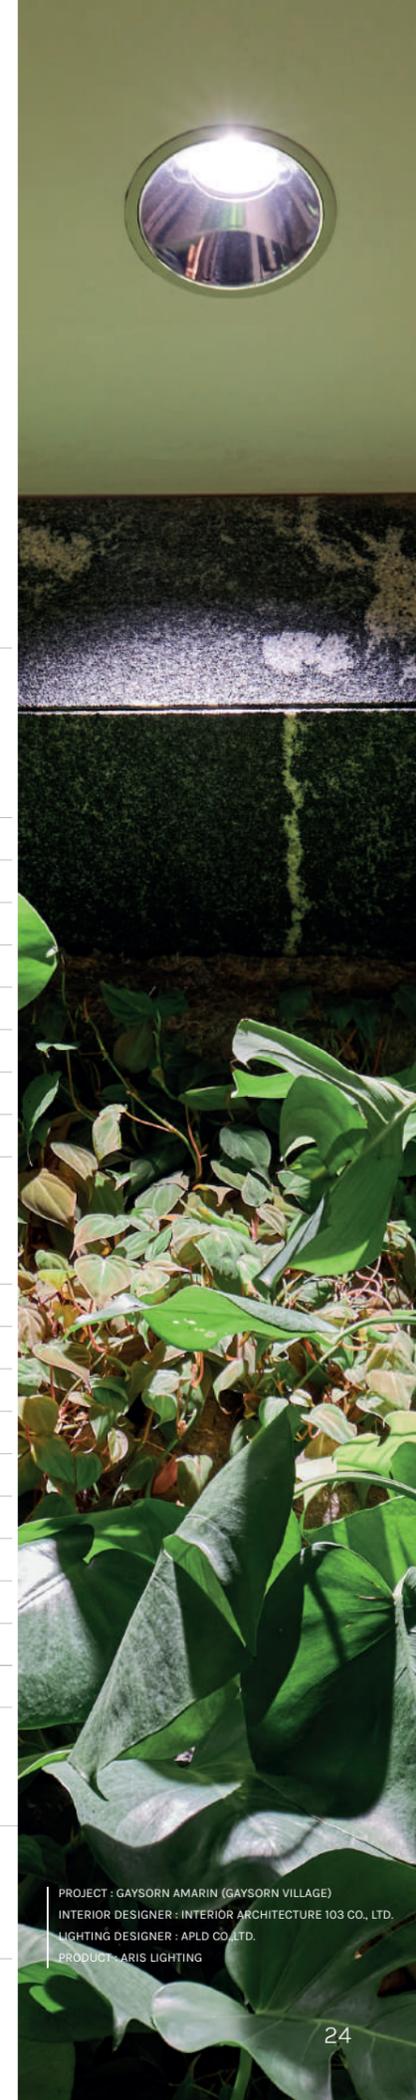
AR125 ROUND
Trimless



ADJUSTABLE DOWNLIGHT

MODEL	AR55RT	AR75RT
DIMENSION (MM)		
CUTOUT (MM)	55	75
WATTAGE	7W / 9W	11W / 13W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	TUNABLE 1800 - 4000 / 2700 - 6000 	TUNABLE 1800 - 4000 / 2700 - 6000
CRI	>90	>90
LUMEN OUTPUT	456 @ 3000K / 570 @ 3000K	773 @ 3000K / 883 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		

MODEL	AR100RT	AR125RT
DIMENSION (MM)		
CUTOUT (MM)	100	125
WATTAGE	20W / 25W	28W / 40W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	TUNABLE 1800 - 4000 / 2700 - 6000 	TUNABLE 1800 - 4000 / 2700 - 6000
CRI	>90	>90
LUMEN OUTPUT	1754 @ 3000K / 2064 @ 3000K	2328 @ 3000K / 3387 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : AERIS LIGHTING

AERO SERIES
LED DOWNLIGHT SYSTEM

AR75 SQUARE
Trim





AR100 SQUARE
Trim




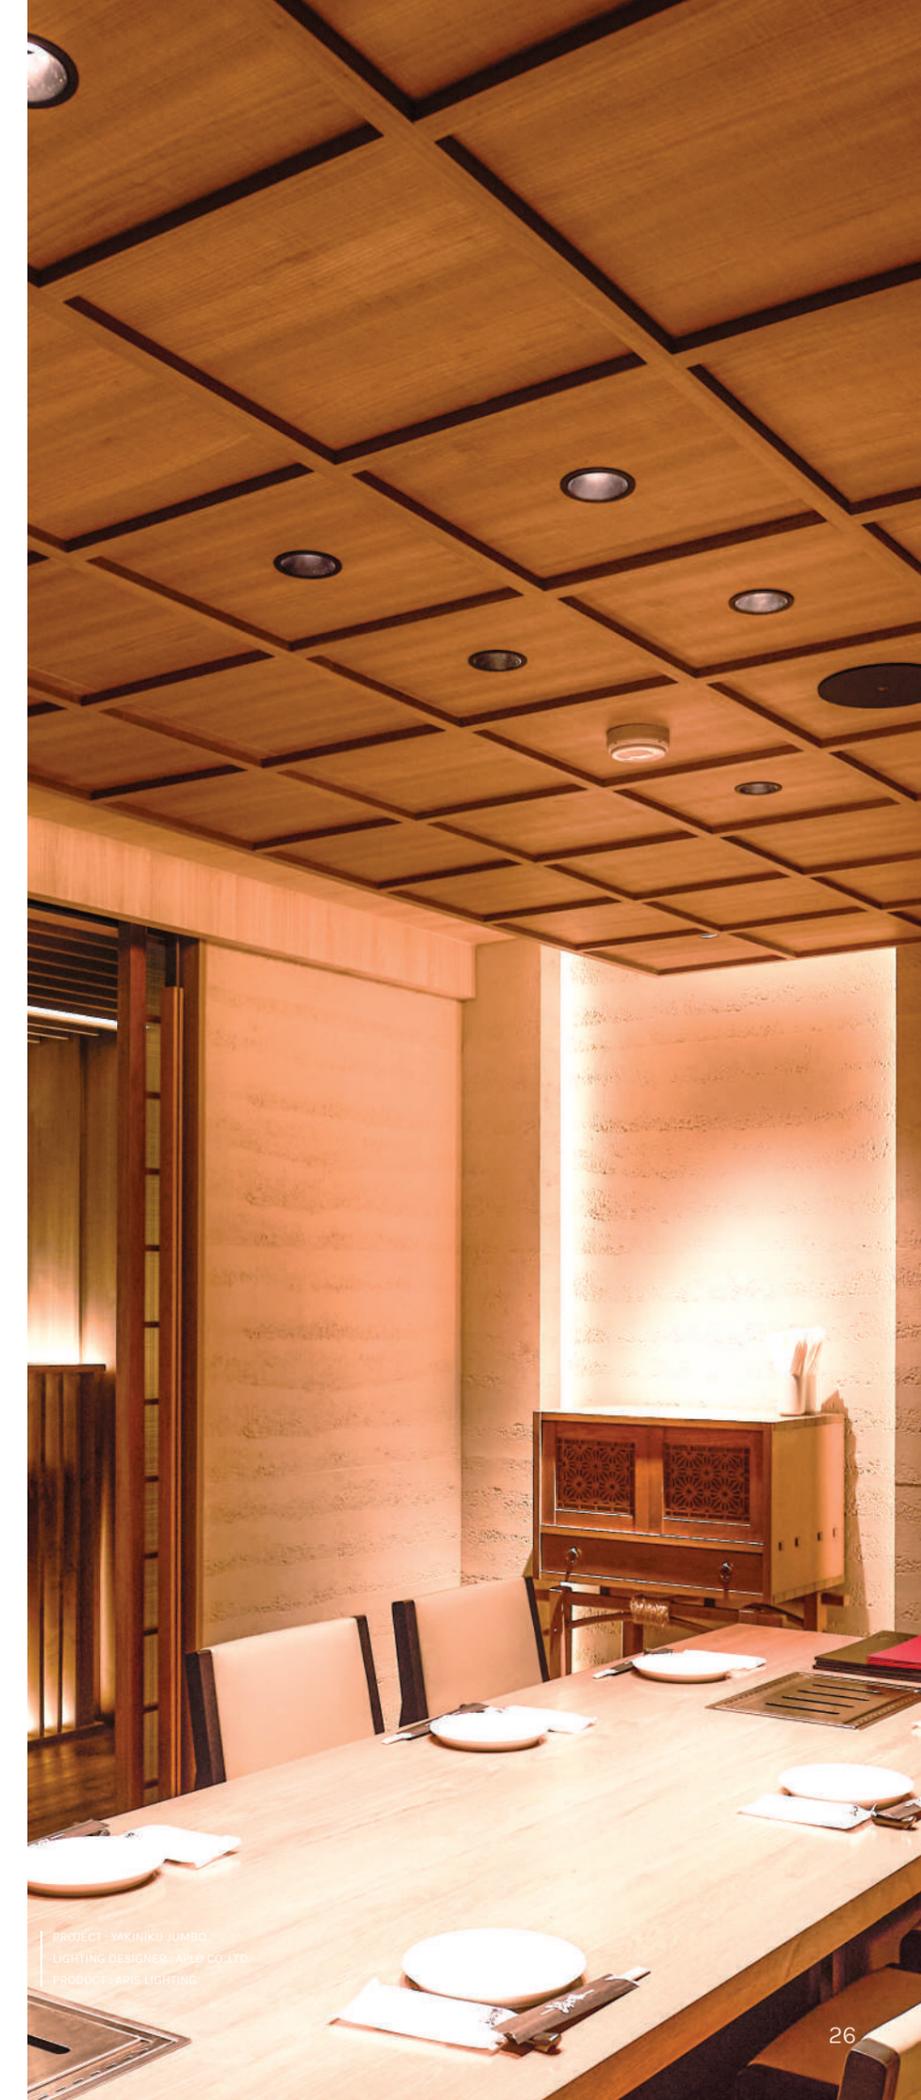
AR125 SQUARE
Trim



ADJUSTABLE DOWNLIGHT

MODEL	AR75S	AR100S
DIMENSION (MM)		
CUTOUT (MM)	75 X 75	105 X 105
WATTAGE	11W / 13W	20W / 25W
CCT	2700K 3000K 3500K 4000K 5000K TUNABLE 1800 - 4000 / 2700 - 6000	2700K 3000K 3500K 4000K 5000K TUNABLE 1800 - 4000 / 2700 - 6000
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	773 @ 3000K / 883 @ 3000K	1754 @ 3000K / 2064 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		

MODEL	AR125S
DIMENSION (MM)	
CUTOUT (MM)	125 X 125
WATTAGE	28W / 40W
CCT	2700K 3000K 3500K 4000K 5000K TUNABLE 1800 - 4000 / 2700 - 6000
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	2328 @ 3000K / 3387 @ 3000K
IP	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	
OPTICAL ACCESSORY	



PROJECT : YAKINIKU JUMBO
LIGHTING DESIGNER : ABLP CO.LTD
PRODUCT : ABLP LIGHTING

AERO SERIES
LED DOWNLIGHT SYSTEM

AR75 SQUARE
Trimless



AR100 SQUARE
Trimless



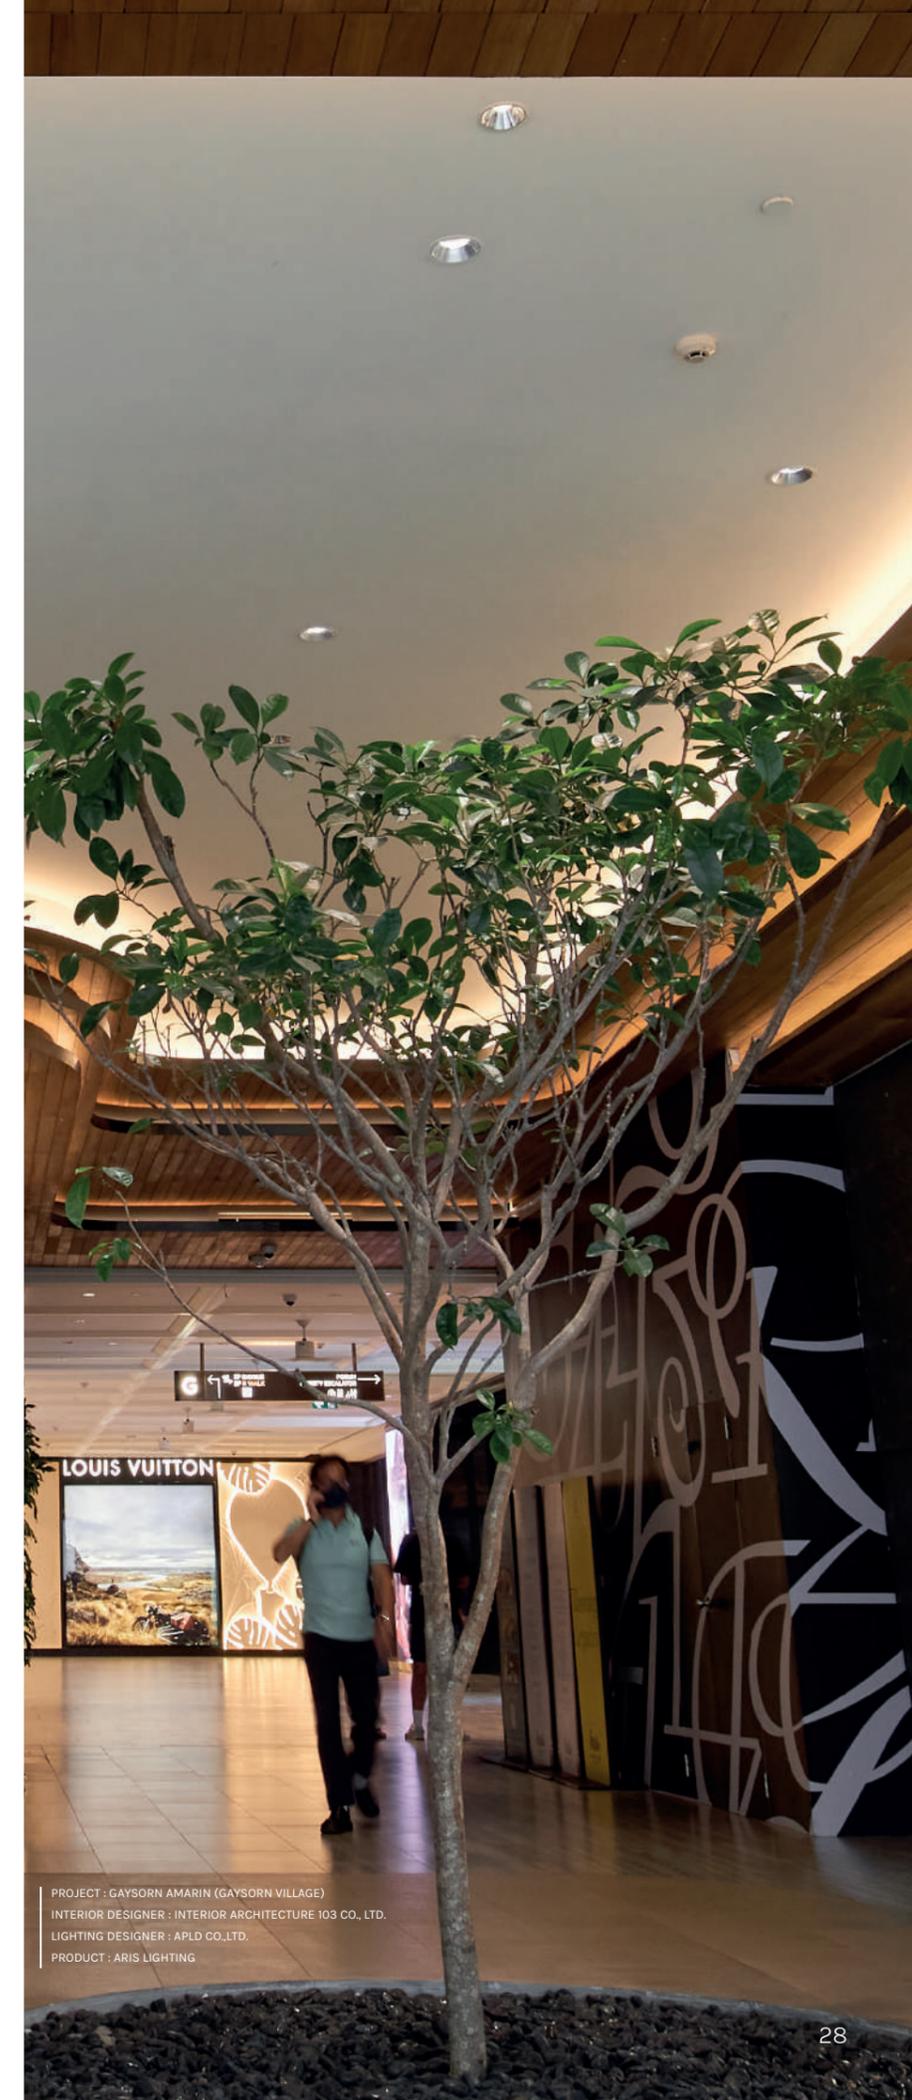
AR125 SQUARE
Trimless



ADJUSTABLE DOWNLIGHT

MODEL	AR75ST	AR100ST
DIMENSION (MM)		
CUTOUT (MM)	75 X 75	105 X 105
WATTAGE	11W / 13W	20W / 25W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	TUNABLE 1800 - 4000 / 2700 - 6000	TUNABLE 1800 - 4000 / 2700 - 6000
BEAM ANGLE	 8° 15° 24° 36° 60°	 15° 24° 36° 50°
CRI	>90	>90
LUMEN OUTPUT	773 @ 3000K / 883 @ 3000K	1754 @ 3000K / 2064 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK BLACK CHROME	 SILVER WHITE BLACK BLACK CHROME
OPTICAL ACCESSORY	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS	 HONEYCOMB LOUVER SPREAD LENS DIFFUSION LENS CLEAR LENS

MODEL	AR125ST
DIMENSION (MM)	
CUTOUT (MM)	125 X 125
WATTAGE	28W / 40W
CCT	2700K 3000K 3500K 4000K 5000K
	TUNABLE 1800 - 4000 / 2700 - 6000
BEAM ANGLE	 15° 24° 36° 50°
CRI	>90
LUMEN OUTPUT	2328 @ 3000K / 3387 @ 3000K
IP	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK BLACK CHROME
OPTICAL ACCESSORY	 Honeycomb Louver Spread Lens Diffusion Lens Clear Lens



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : ARIS LIGHTING

AERO SERIES
LED DOWNLIGHT SYSTEM

AR55 ROUND
Pin Hole



AR75 ROUND
Pin Hole



ADJUSTABLE DOWNLIGHT

MODEL	AR55R	AR75R
DIMENSION (MM)		
CUTOUT (MM)	55	75
WATTAGE	7W / 9W	11W / 13W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	TUNABLE 1800 - 4000 / 2700 - 6000	TUNABLE 1800 - 4000 / 2700 - 6000
BEAM ANGLE	 15° 24° 36° 50°	 8° 15° 24° 36° 60°
CRI	>90	>90
LUMEN OUTPUT	456 @ 3000K / 570 @ 3000K	773 @ 3000K / 883 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-

OPTICAL ACCESSORY




AR55 ROUND
Key Hole



AR75 ROUND
Key Hole



MODEL	AR55R	AR75R
DIMENSION (MM)		
CUTOUT (MM)	55	75
WATTAGE	7W / 9W	11W / 13W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	TUNABLE 1800 - 4000 / 2700 - 6000	TUNABLE 1800 - 4000 / 2700 - 6000
BEAM ANGLE	 15° 24° 36° 50°	 15° 24° 36° 50°
CRI	>90	>90
LUMEN OUTPUT	1754 @ 3000K / 2064 @ 3000K	2328 @ 3000K / 3387 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-



PROJECT : BRIDDERS OPTICAL
LIGHTING DESIGNER : PUNMASTUDIO
PRODUCT : IA SERIES , IN SERIES , IPRO SERIES ,
IBIS SERIES , CASAMBI , STRETCHED FABRIC



MINI FIX DOWNLIGHT
AVA SERIES

AVA SERIES
MINI FIXED DOWNLIGHT



AV17 ROUND
Trim



AV25 ROUND
Trim



AV35 ROUND
Trim



AV50 ROUND
Trim

AVA SERIES
LED DOWNLIGHT SYSTEM

AV17 ROUND
Trim



AV25 ROUND
Trim



AV35 ROUND
Trim



AV50 ROUND
Trim



MINI FIXED DOWNLIGHT

MODEL	AV17R	AV25R
DIMENSION (MM)		
CUTOUT (MM)	17	25
WATTAGE	1W/2W	1W/3W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	70 @ 3000K / 105 @ 3000K	70 @ 3000K / 140 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-

OPTICAL ACCESSORY	AV17R	AV25R

MODEL	AV50R	AV50R
DIMENSION (MM)		
CUTOUT (MM)	35	50
WATTAGE	1W/3W	8W/10
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	70 @ 3000K / 140 @ 3000K	345 @ 3000K / 556 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-

OPTICAL ACCESSORY	AV50R	AV50R





PULL-OUT DOWNLIGHT

AUSTIN SERIES

AUSTIN SERIES

PULL-OUT DOWNLIGHT



AU50 ROUND
Trim



AU50 ROUND
Trimless



AU70 ROUND
Trim



AU70 ROUND
Trimless



AU50x2S SQUARE
Trim



AU50x2ST SQUARE
Trimless

AUSTIN SERIES

PULL-OUT DOWNLIGHT



AU58S SQUARE
Trim



AU58SD SQUARE
Trim



AU78S SQUARE
Trim



AU78SD SQUARE
Trim



AU78S ROUND
Trim

AUSTIN SERIES

FIXED ANGLE FRAMING SPOTLIGHT



AU25RF
Fixed Angle



AU40RF
Fixed Angle



AU75RF
Fixed Angle



AU95RF
Fixed Angle



AU125RF
Fixed Angle

AUSTIN SERIES

ZOOMABLE FRAMING SPOTLIGHT



AU25RFZ
Zoomable



AU40RFZ
Zoomable



AU75RFZ
Zoomable



AU95RFZ
Zoomable



AU125RFZ
Zoomable



AUSTIN SERIES
LED DOWNLIGHT SYSTEM

AU50 ROUND
Trim




AU70 ROUND
Trim



ADJUSTABLE
PULL-OUT DOWNLIGHT

MODEL	AU50R	AU70R
DIMENSION (MM)		
CUTOUT (MM)	50	70
WATTAGE	7W / 9W	10W / 14W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE) 	2700 - 6000 (TUNABLE)
CRI	>90	>90
LUMEN OUTPUT	407 @ 3000K / 543 @ 3000K	599 @ 3000K / 922 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-



AU50 ROUND
Trimless



AU70 ROUND
Trimless



MODEL	AU50RT	AU70RT
DIMENSION (MM)		
CUTOUT (MM)	50	70
WATTAGE	7W / 9W	10W / 14W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE) 	2700 - 6000 (TUNABLE)
CRI	>90	>90
LUMEN OUTPUT	407 @ 3000K / 543 @ 3000K	599 @ 3000K / 922 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-



AUSTIN SERIES
LED DOWNLIGHT SYSTEM



AU50X2 SQUARE
TRIM




AU50X2 SQUARE
TRIMLESS



ADJUSTABLE
PULL-OUT DOWNLIGHT

MODEL	AU50X2S	AU50X2ST
DIMENSION (MM)		
CUTOUT (MM)	108	108
WATTAGE	2X7W / 2X9W	2X7W / 2X9W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	 15° 24° 36°	 15° 24° 36°
CRI	>90	>90
LUMEN OUTPUT	814 @ 3000K / 1068 @ 3000K	814 @ 3000K / 1068 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-

OPTICAL ACCESSORY





AU58S SQUARE
Trim



AU58SD SQUARE
Trim



MODEL	AU58S	AU58SD
DIMENSION (MM)		
CUTOUT (MM)	58	58
WATTAGE	7W / 9W	7W / 9W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	 10° 15° 24° 36° 45°	 10° 15° 24° 36° 45°
CRI	>90	>90
LUMEN OUTPUT	456 @ 3000K / 570 @ 3000K	456 @ 3000K / 570 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-



AUSTIN SERIES
LED DOWNLIGHT SYSTEM

AU78S SQUARE
Trim



AU78SD SQUARE
Trim



AU65RG Round
Trim



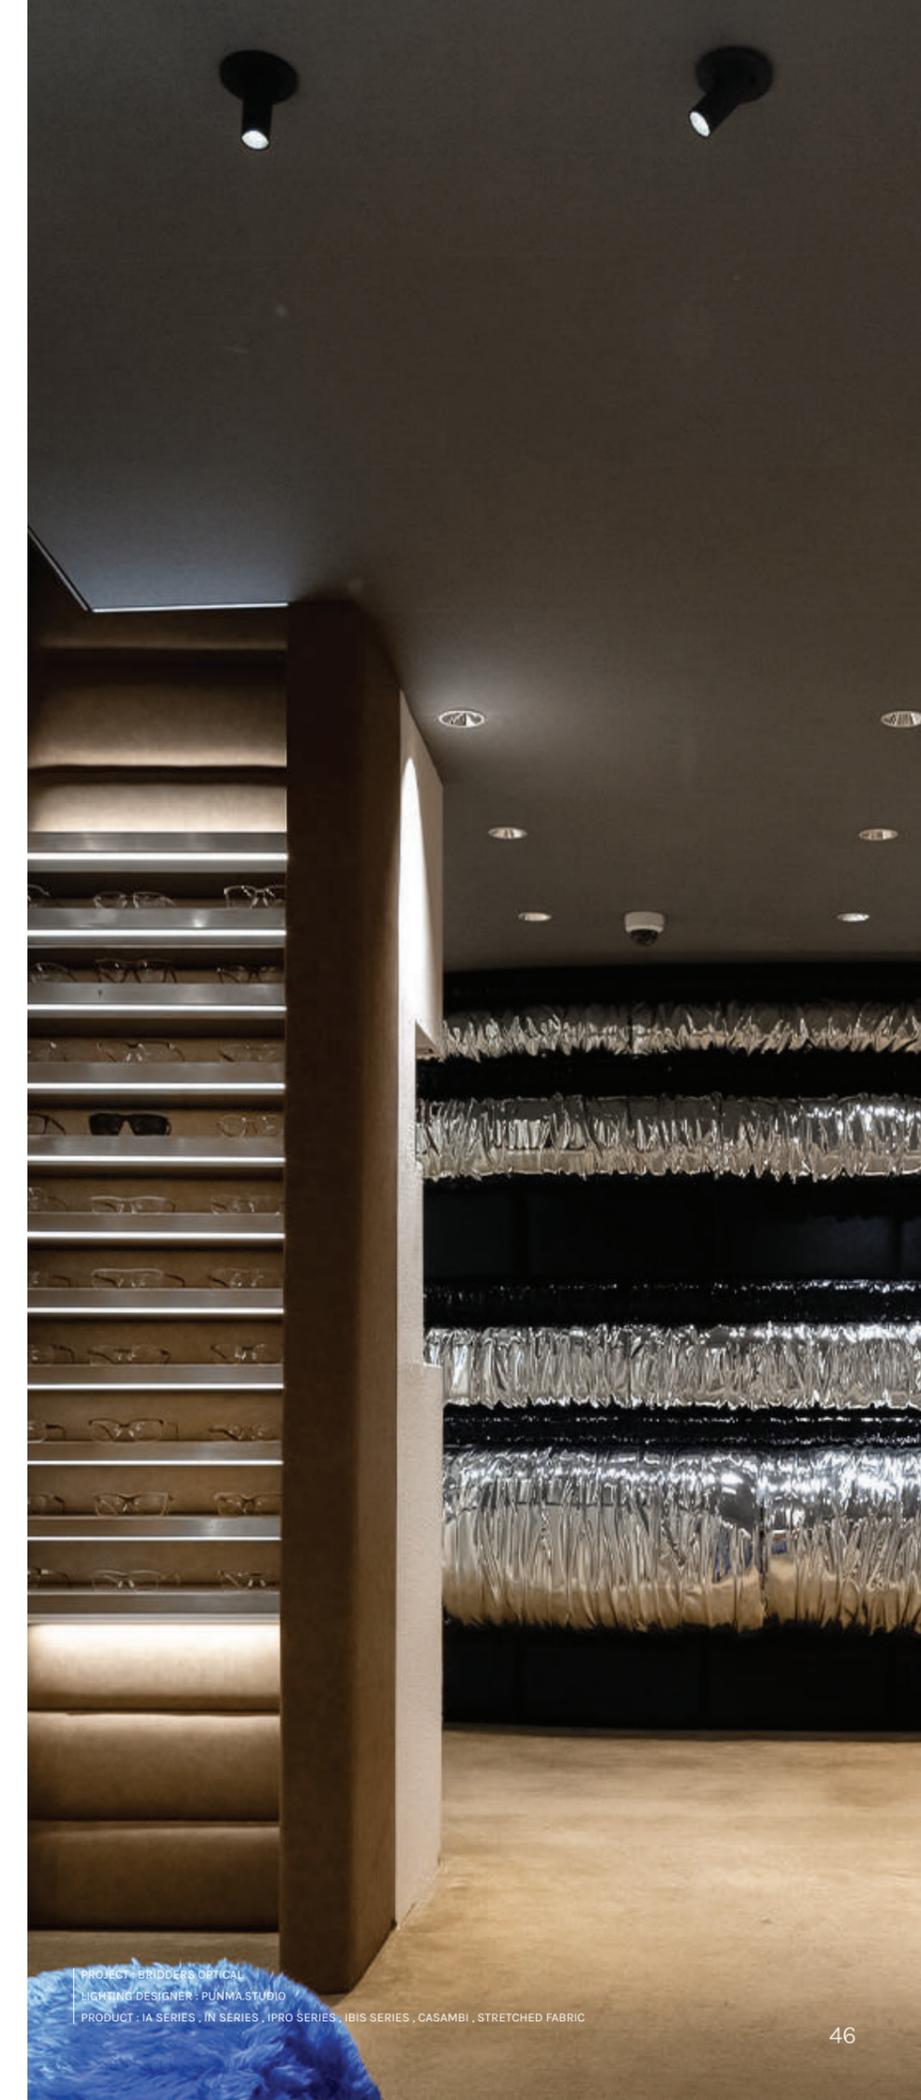
ADJUSTABLE
PULL-OUT DOWNLIGHT

MODEL	AU78S	AU78SD
DIMENSION (MM)		
CUTOUT (MM)	78	78
WATTAGE	10W / 11.5W	10W / 11.5W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (TUNABLE)	2700 - 6000 (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	940 @ 3000K / 1096 @ 3000K	940 @ 3000K / 1096 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-

OPTICAL ACCESSORY



MODEL	AU65RG
DIMENSION (MM)	
CUTOUT (MM)	105
WATTAGE	25W / 30W
CCT	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	2050 @ 3000K / 2427 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-



PROJECT: BRIDDER'S OPTICAL
LIGHTING DESIGNER: PUNMA STUDIO
PRODUCT: IA SERIES, IN SERIES, IPRO SERIES, IBIS SERIES, CASAMBI, STRETCHED FABRIC

AUSTIN SERIES
LED DOWNLIGHT SYSTEM



AU25RF
Fixed Angle



AU40RF
Fixed Angle



RECESSED FRAMING
SPOTLIGHT

MODEL	AU25RF	AU40RF
DIMENSION (MM)		
CUTOUT (MM)	25	70
WATTAGE	5W	10W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 55°	 55°
CRI	>90	>90
LUMEN OUTPUT	145-160 @ 3000K	300-350 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-


AU75RF
Fixed Angle



MODEL	AU75RF
DIMENSION (MM)	
CUTOUT (MM)	75
WATTAGE	10W
CCT	2700K 3000K 4000K
BEAM ANGLE	 55°
CRI	>90
LUMEN OUTPUT	300-350 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-

AU95RF
Fixed Angle



MODEL	AU95RF
DIMENSION (MM)	
CUTOUT (MM)	95
WATTAGE	20W
CCT	2700K 3000K 4000K
BEAM ANGLE	 55°
CRI	>90
LUMEN OUTPUT	745-780 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-



AUSTIN SERIES
LED DOWNLIGHT SYSTEM

AU125RF
Fixed Angle



AU25RFZ
Zoomable





AU40RFZ
Zoomable





AU75RFZ
Zoomable



RECESSED FRAMING
SPOTLIGHT

MODEL	AU125RF	AU25RFZ
DIMENSION (MM)		
CUTOUT (MM)	125	25
WATTAGE	18W	5W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 55°	 15°-36°
CRI	>90	>90
LUMEN OUTPUT	1050-1150 @ 3000K	100-140 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	AU40RFZ	AU75RFZ
DIMENSION (MM)		
CUTOUT (MM)	70	75
WATTAGE	10W	10W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 15°-36°	 15°-36°
CRI	>90	>90
LUMEN OUTPUT	300-350 @ 3000K	300-350 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



AUSTIN SERIES
LED DOWNLIGHT SYSTEM

AU95RFZ
Zoomable



AU125RFZ
Zoomable



RECESSED FRAMING
SPOTLIGHT

MODEL	AU95RFZ	AU125RFZ
DIMENSION (MM)		
CUTOUT (MM)	95	125
WATTAGE	20W	28W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	15°-36°	15°-36°
CRI	>90	>90
LUMEN OUTPUT	630-650 @ 3000K	870-1000 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-





GENERAL DOWNLIGHT

AURA SERIES

AURA SERIES GENERAL DOWNLIGHT



AA75 ROUND



AA90 ROUND



AA105 ROUND



AA120 ROUND

AURA SERIES
LED DOWNLIGHT SYSTEM

AA75 ROUND
GENERAL DOWNLIGHT



AA90 ROUND
GENERAL DOWNLIGHT



FIXED DOWNLIGHT

MODEL	AA75R	AA90R
DIMENSION (MM)		
CUTOUT (MM)	75	90
WATTAGE	5W	10W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	90°	90°
CRI	>90	>90
LUMEN OUTPUT	315@ 3000K	920@ 3000K
IP	IP20	IP20
DIMMING	NON-DIM PHASE 0/1-10V DALI BLE ZIGBEE	NON-DIM PHASE 0/1-10V DALI BLE ZIGBEE
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-

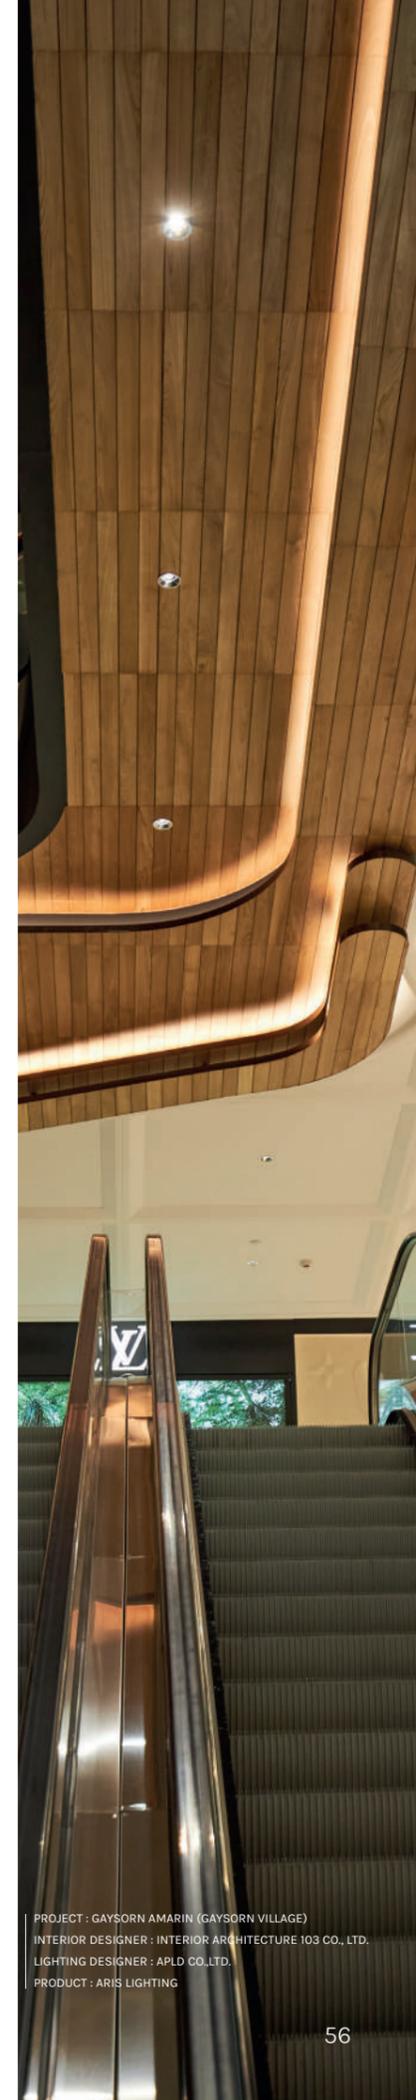
AA105 ROUND
GENERAL DOWNLIGHT



AA120 ROUND
GENERAL DOWNLIGHT



MODEL	AA105R	AA120R
DIMENSION (MM)		
CUTOUT (MM)	105	120
WATTAGE	12W	15W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	90°	90°
CRI	>90	>90
LUMEN OUTPUT	1212@ 3000K	1425@ 3000K
IP	IP20	IP20
DIMMING	NON-DIM PHASE 0/1-10V DALI BLE ZIGBEE	NON-DIM PHASE 0/1-10V DALI BLE ZIGBEE
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.LTD.
PRODUCT : ARIS LIGHTING



MINI ADJUSTABLE DOWNLIGHT
ALEX SERIES

ALEX SERIES
MINI ADJUSTABLE DOWNLIGHT



AL35 ROUND
Trim



AL35 ROUND
Trimless



AL50 ROUND
Trim



AL50 ROUND
Trimless

ALEX SERIES
LED DOWNLIGHT SYSTEM

AL35 ROUND
Trim



AL50 ROUND
Trim



AL35 ROUND
Trimless



AL50 ROUND
Trimless



MINI ADJUSTABLE DOWNLIGHT

MODEL	AL35R	AL50R
DIMENSION (MM)		
CUTOUT (MM)	35	50
WATTAGE	6W/8W	7W / 9W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE) 	2700 - 6000 (TUNABLE)
CRI	>90	>90
LUMEN OUTPUT	317 @ 3000K / 375 @ 3000K	626 @ 3000K / 717 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-

MODEL	AL35RT	AL50RT
DIMENSION (MM)		
CUTOUT (MM)	35	50
WATTAGE	6W/8W	7W / 9W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE) 	2700 - 6000 (TUNABLE)
CRI	>90	>90
LUMEN OUTPUT	317 @ 3000K / 375 @ 3000K	626 @ 3000K / 717 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-





WALLWASHER DOWNLIGHT
ASTON SERIES

ASTON SERIES
WALLWASHER DOWNLIGHT



AT55 ROUND
Wall washer



AT75 ROUND
Wall washer



AT95 ROUND
Wall washer



AT125 ROUND
Wall washer

ASTON SERIES
LED DOWNLIGHT SYSTEM



AT55 ROUND
WALL WASHER



AT75 ROUND
WALL WASHER



WALLWASHER DOWNLIGHT



MODEL	AT55R	AT75R
DIMENSION (MM)		
CUTOUT (MM)	55	75
WATTAGE	5W/9W	10.5W/15W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE)  80°	2700 - 6000 (TUNABLE)  80°
CRI	>90	>90
LUMEN OUTPUT	240 @ 3000K / 498 @ 3000K	498 @ 3000K / 747 @ 3000K
IP	IP20	IP20
DIMMING	ON-OFF PHASE 0-10V DALI	ON-OFF PHASE 0-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

AT95 ROUND
WALL WASHER



AT125 ROUND
WALL WASHER



MODEL	AT95R	AT125R
DIMENSION (MM)		
CUTOUT (MM)	95	125
WATTAGE	20W	35W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE)  80°	2700 - 6000 (TUNABLE)  80°
CRI	>90	>90
LUMEN OUTPUT	910 @ 3000K	1610 @ 3000K
IP	IP20	IP20
DIMMING	ON-OFF PHASE 0-10V DALI	ON-OFF PHASE 0-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



PROJECT : JEWELRY TRADE CENTER SILOM
 INTERIOR DESIGNER : JEWELRY TRADE CENTER SILOM
 LIGHTING DESIGNER : PUNMA STUDIO
 PRODUCT : ANN SERIES (AN95 R / IA8-RGBW-16.9W / CASAMB)



MR16 RETROFIT DOWNLIGHT
ANN SERIES

ANN SERIES
MR16 RETROFIT DOWNLIGHT



AN75 ROUND
Trim



AN75 ROUND
Trimless



AN75 SQUARE
Trim



AN75 SQUARE
Trimless



AN85 ROUND
Trim



AN85 ROUND
Trimless



AN85 SQUARE
Trim



AN85 SQUARE
Trimless

ANN SERIES

MR16 RETROFIT DOWNLIGHT



AN L ROUND
Trim



AN1 MODULE



MR16 RETROFIT



ANN SERIES
LED DOWNLIGHT SYSTEM

AN75 ROUND
Trim



AN75 SQUARE
Trim



RETROFIT DOWNLIGHT

MODEL	AN75R	AN75S
DIMENSION (MM)		
CUTOUT (MM)	75	75
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK	 SILVER WHITE BLACK

ANN
LED DOWNLIGHT SYSTEM

AN75 ROUND
Trimless



AN75 SQUARE
Trimless



RETROFIT DOWNLIGHT

MODEL	AN75RT	AN75ST
DIMENSION (MM)		
CUTOUT (MM)	75	75
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK	 SILVER WHITE BLACK

ANN
LED DOWNLIGHT SYSTEM

AN85 ROUND
Trim



AN85 SQUARE
Trim



RETROFIT DOWNLIGHT

MODEL	AN85R	AN85S
DIMENSION (MM)		
CUTOUT (MM)	85	85
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK	 SILVER WHITE BLACK

ANN
LED DOWNLIGHT SYSTEM

AN85 ROUND
Trimless



AN85 SQUARE
Trimless



RETROFIT DOWNLIGHT


MODEL	AN85RT	AN85ST
DIMENSION (MM)		
CUTOUT (MM)	85	85
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK	 SILVER WHITE BLACK

ANN SERIES
LED DOWNLIGHT SYSTEM

AN L
Trim



RETROFIT DOWNLIGHT



MODEL	AN L
DIMENSION (MM)	
CUTOUT (MM)	75
APPLICATION AREAS	ACCENT LIGHTING
IP	20
MOUNTING	RECESSED
COLOR	WHITE BLACK
ACCESSORY	 SILVER WHITE BLACK

ANN SERIES
LED DOWNLIGHT SYSTEM

AN1 MODULE



RETROFIT DOWNLIGHT

MODEL	AN1	MR16
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	7W/9W	6.5W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)	2700K 3000K 4000K 6000K
BEAM ANGLE	 15° 24° 36° 60°	 10° 24° 36° 60°
CRI	>90	>90
LUMEN OUTPUT	545 @ 3000K / 681@3000K	500 @ 3000K
IP	IP20 / IP54	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARJIS LIGHTING



IP65 GENERAL DOWNLIGHT

ACE SERIES

ACE SERIES IP65 GENERAL DOWNLIGHT



AE75 ROUND
Trim



AE85 ROUND
Trim



AE105 ROUND
Trim



AE125 ROUND
Trim



AE150 ROUND
Trim

ACE SERIES
LED DOWNLIGHT SYSTEM

AE75 ROUND
GENERAL DOWNLIGHT



AE85 ROUND
GENERAL DOWNLIGHT



AE105 ROUND
GENERAL DOWNLIGHT



AE125 ROUND
GENERAL DOWNLIGHT



FIXED DOWNLIGHT

MODEL	AE75R	AE85R
DIMENSION (MM)		
CUTOUT (MM)	75	85
WATTAGE	9W / 11W	11W / 13W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE)	2700 - 6000 (TUNABLE)
CRI	>90	>90
LUMEN OUTPUT	683 @ 3000K / 820 @ 3000K	811 @ 3000K / 927 @ 3000K
IP	IP65	IP65
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		

MODEL	AE105R	AE125R
DIMENSION (MM)		
CUTOUT (MM)	105	125
WATTAGE	25W / 30W	36W / 41W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (TUNABLE)	2700 - 6000 (TUNABLE)
CRI	>90	>90
LUMEN OUTPUT	1846 @ 3000K / 2159 @ 3000K	2775 @ 3000K / 3191 @ 3000K
IP	IP65	IP65
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		



ACE SERIES
LED DOWNLIGHT SYSTEM

AE150 ROUND
GENERAL DOWNLIGHT



FIXED DOWNLIGHT

MODEL	AE150R
DIMENSION (MM)	
CUTOUT (MM)	150
WATTAGE	50W / 60W
CCT	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	3828 @ 3000K / 3191 @ 3000K
IP	IP65
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	
OPTICAL ACCESSORY	





GENERAL DOWNLIGHT

ARNO SERIES

ARNO SERIES GENERAL DOWNLIGHT



A090 ROUND
Trim



A090 SQUARE
Trim



A0125 ROUND
Trim



A0125 SQUARE
Trim



A0145 ROUND
Trim



A0145 SQUARE
Trim



A0165 ROUND
Trim



A0165 SQUARE
Trim

ARNO SERIES
LED DOWNLIGHT SYSTEM

A090 ROUND
GENERAL DOWNLIGHT



A0125 ROUND
GENERAL DOWNLIGHT





A0145 ROUND
GENERAL DOWNLIGHT





A0165 ROUND
GENERAL DOWNLIGHT



FIXED DOWNLIGHT

MODEL	A090R	A0125R
DIMENSION (MM)		
CUTOUT (MM)	90	125
WATTAGE	14W	24W
CCT	2700K 3000K 4000K	2700K 3000K 4000K

MODEL	A0145R	A0165R
DIMENSION (MM)		
CUTOUT (MM)	145	165
WATTAGE	32W	42W
CCT	2700K 3000K 4000K	2700K 3000K 4000K

BEAM ANGLE	A090R	A0125R
		
CRI	>90	>90
LUMEN OUTPUT	1183 @ 3000K	2027 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

BEAM ANGLE	A0145R	A0165R
		
CRI	>90	>90
LUMEN OUTPUT	2668 @ 3000K	3272 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
 INTERIOR DESIGNER : INTERIOR ARCHITECTURE 360 CO., LTD.
 LIGHTING DESIGNER : APLD CO., LTD.
 PRODUCT : ARIS LIGHTING

ARNO SERIES
LED DOWNLIGHT SYSTEM

A090 SQUARE
GENERAL DOWNLIGHT



A0125 SQUARE
GENERAL DOWNLIGHT





A0145 SQUARE
GENERAL DOWNLIGHT





A0165 SQUARE
GENERAL DOWNLIGHT



FIXED DOWNLIGHT

MODEL	A090S	A0125S
DIMENSION (MM)		
CUTOUT (MM)	90	125
WATTAGE	14W	24W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	1183 @ 3000K	2027 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	A0145S	A0165S
DIMENSION (MM)		
CUTOUT (MM)	145	165
WATTAGE	32W	42W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	2668 @ 3000K	3272 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
 INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
 LIGHTING DESIGNER : APLD CO.,LTD.
 PRODUCT : ARIS LIGHTING



LED RECESSED DOWNLIGHT
ALINE SERIES

ALINE SERIES
LED RECESSED DOWNLIGHT



AI-37RE-063
Trim



AI-42RET-066
Trimless



AI-37RE-142
Trim



AI-42RET-145
Trimless



AI-37RE-275
Trim



AI-42RET-278
Trimless

ALINE SERIES

LED RECESSED DOWNLIGHT



AI-27RE-065S
Trim



AI-37RET-070S
Trimless



AI-27RE-122S
Trim



AI-37RET-127S
Trimless



AI-27RE-263S
Trim



AI-37RET-241S
Trimless

ALINE SERIES

LED RECESSED DOWNLIGHT



AI-27RE-065R
Trim



AI-37RET-070R
Trimless



AI-27RE-122R
Trim



AI-37RET-127R
Trimless



AI-27RE-263R
Trim



AI-37RET-241R
Trimless

ALINE SERIES

LED RECESSED DOWNLIGHT



AI-43ARE-078S
Adjustable



AI-43ARE-136S
Adjustable



AI-43ARE-250S
Adjustable



AI-43ARE-078R
Adjustable



AI-43ARE-136R
Adjustable



AI-43ARE-250R
Adjustable

ALINE SERIES

LED RECESSED DOWNLIGHT



AI-46ARE-083
Adjustable



AI-46ARE-113
Adjustable



AI-46ARE-173
Adjustable



AI-46ARE-323
Adjustable

ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-37RE-063
Trim




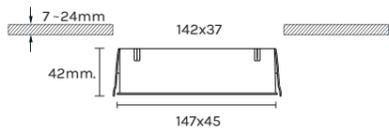
AI-37RE-142
Trim



AI-37RE-275
Trim



LED RECESSED DOWNLIGHT

MODEL	AI-37RE-063	AI-37RE-142
DIMENSION (MM)		
CUTOUT (MM)	63X37	142X37
WATTAGE	6W	15W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	326 @ 3000K	755 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	AI-37RE-275
DIMENSION (MM)	
CUTOUT (MM)	275X37
WATTAGE	30W
CCT	22700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1630 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-42RET-066
Trimless





AI-42RET-145
Trimless




AI-42RET-278
Trimless



LED RECESSED DOWNLIGHT

MODEL	AI-42RET-066	AI-42RET-145
DIMENSION (MM)		
CUTOUT (MM)	66X42	145X42
WATTAGE	6W	15W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	326 @ 3000K	755 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	AI-42RET-278
DIMENSION (MM)	
CUTOUT (MM)	278X42
WATTAGE	30W
CCT	22700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1630 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-27RE-065S
Trim





AI-27RE-122S
Trim




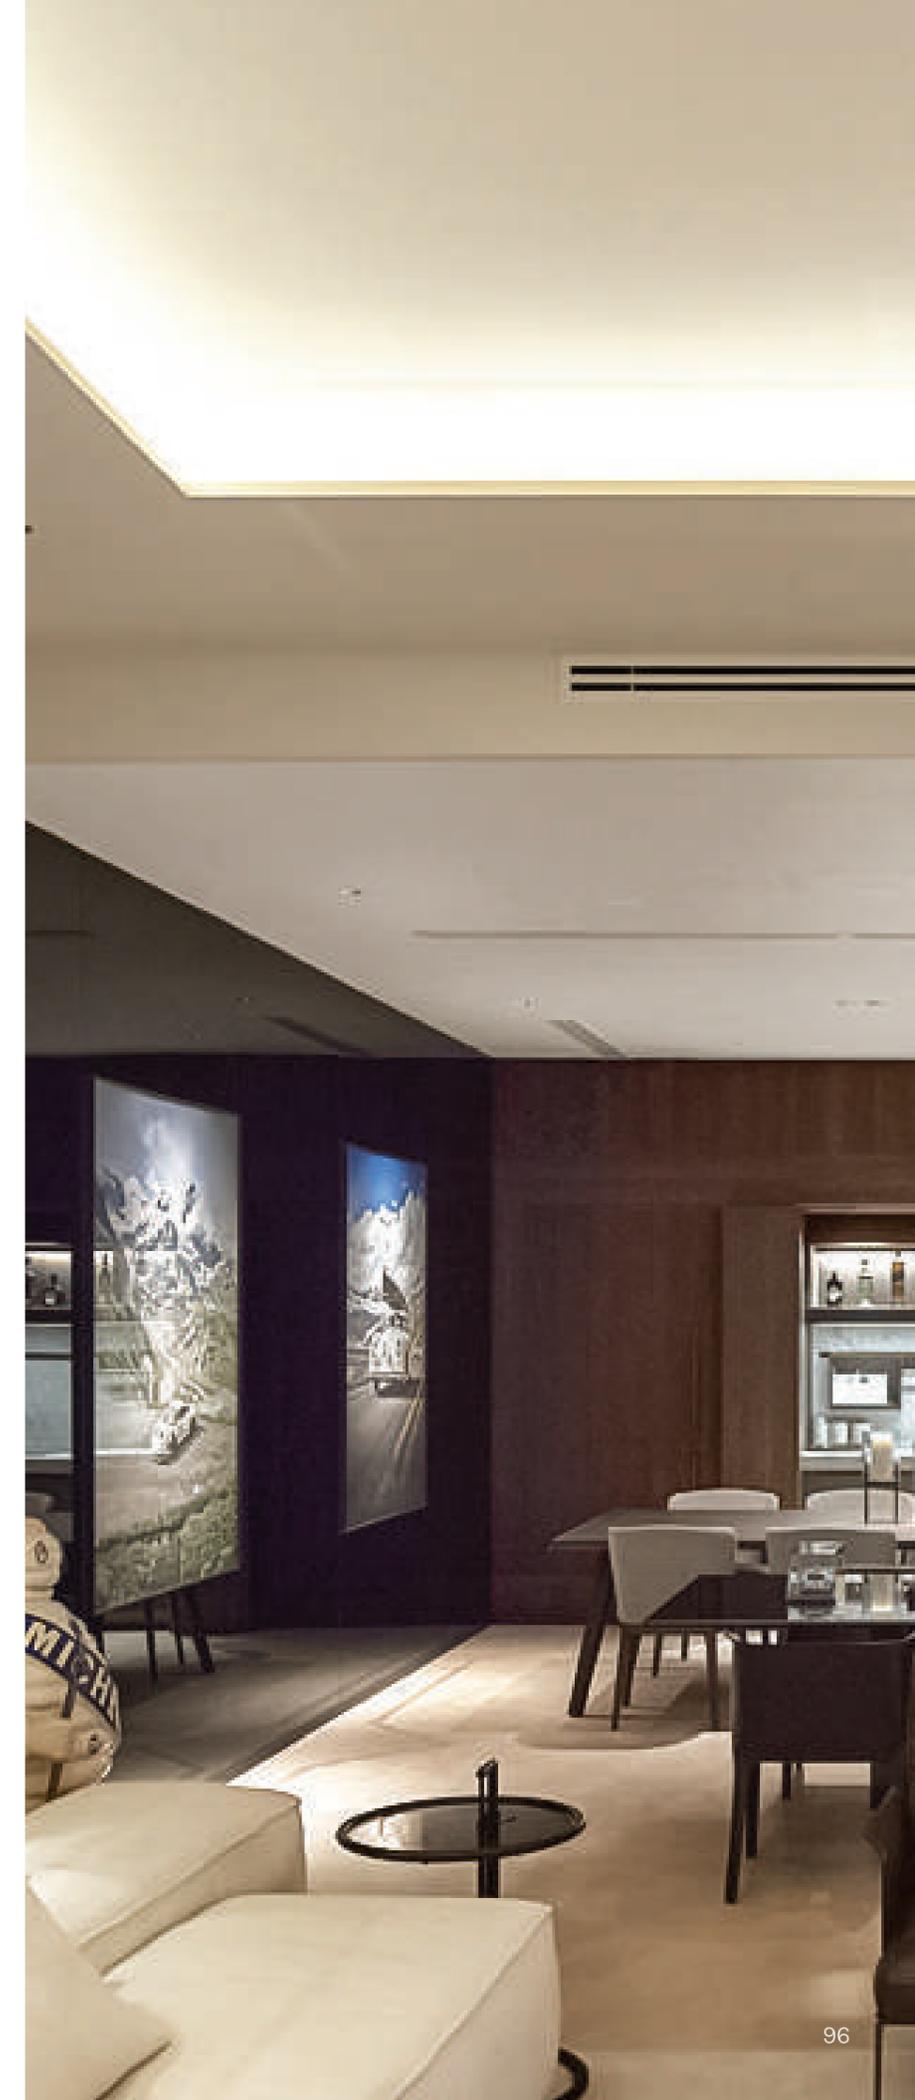
AI-27RE-236S
Trim



LED RECESSED DOWNLIGHT

MODEL	AI-27RE-065S	AI-27RE-122S
DIMENSION (MM)		
CUTOUT (MM)	65X27	122X27
WATTAGE	9W	12W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	489 @ 3000K	652 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 Transparent BLACK	 Transparent BLACK
OPTICAL ACCESSORY	-	-

MODEL	AI-27RE-236S
DIMENSION (MM)	
CUTOUT (MM)	236X27
WATTAGE	20W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1086 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	 Transparent BLACK
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-37RET-070S
Trimless



AI-37RET-127S
Trimless



AI-37RET-241S
Trimless



LED RECESSED DOWNLIGHT

MODEL	AI-37RET-070S	AI-37RET-127S
DIMENSION (MM)		
CUTOUT (MM)	70X37	127X37
WATTAGE	6W	12W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	326 @ 3000K	652 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-

MODEL	AI-37RET-241S
DIMENSION (MM)	
CUTOUT (MM)	241X37
WATTAGE	20W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1086 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	
OPTICAL ACCESSORY	-



PROJECT : LIANA RESTAURANT
INTERIOR DESIGNER : MAAT
LIGHTING DESIGNER : LIGHTS.STUDIO
PRODUCT : IA SERIES , IN SERIES , ROME SERIES , CASAMBI

ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-27RE-065R
Trim






AI-27RE-122R
Trim




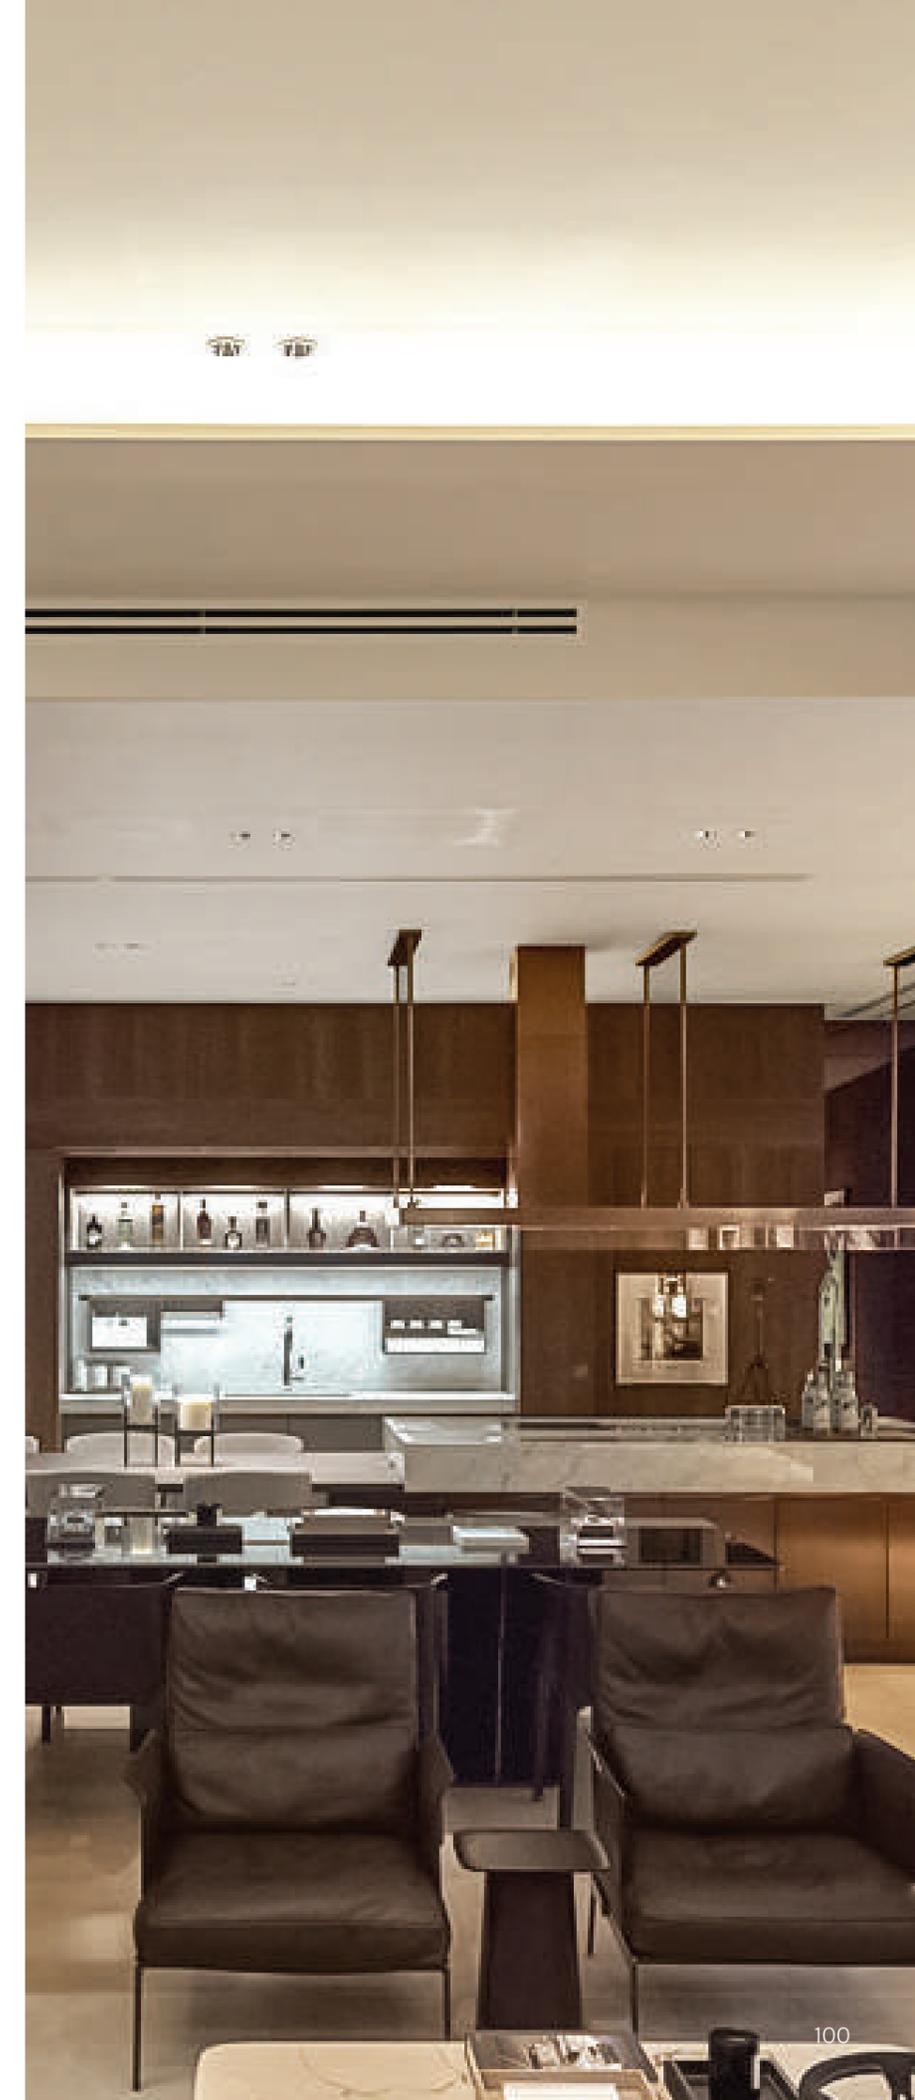
AI-27RE-236R
Trim



LED RECESSED DOWNLIGHT

MODEL	AI-27RE-065R	AI-27RE-122R
DIMENSION (MM)		
CUTOUT (MM)	65X27	122X27
WATTAGE	9W	12W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE	 15° 24° 36°	 15° 24° 36°
CRI	>90	>90
LUMEN OUTPUT	489 @ 3000K	652 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 WHITE GOLD WHITE BLACK WHITE BLACK Gold BLACK	 WHITE GOLD WHITE BLACK WHITE BLACK Gold BLACK
OPTICAL ACCESSORY	-	-

MODEL	AI-27RE-236R
DIMENSION (MM)	
CUTOUT (MM)	236X27
WATTAGE	20W
CCT	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)
BEAM ANGLE	 15° 24° 36°
CRI	>90
LUMEN OUTPUT	1086 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	 WHITE GOLD WHITE BLACK WHITE BLACK Gold BLACK
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-37RET-070R
Trimless



AI-37RET-127R
Trimless



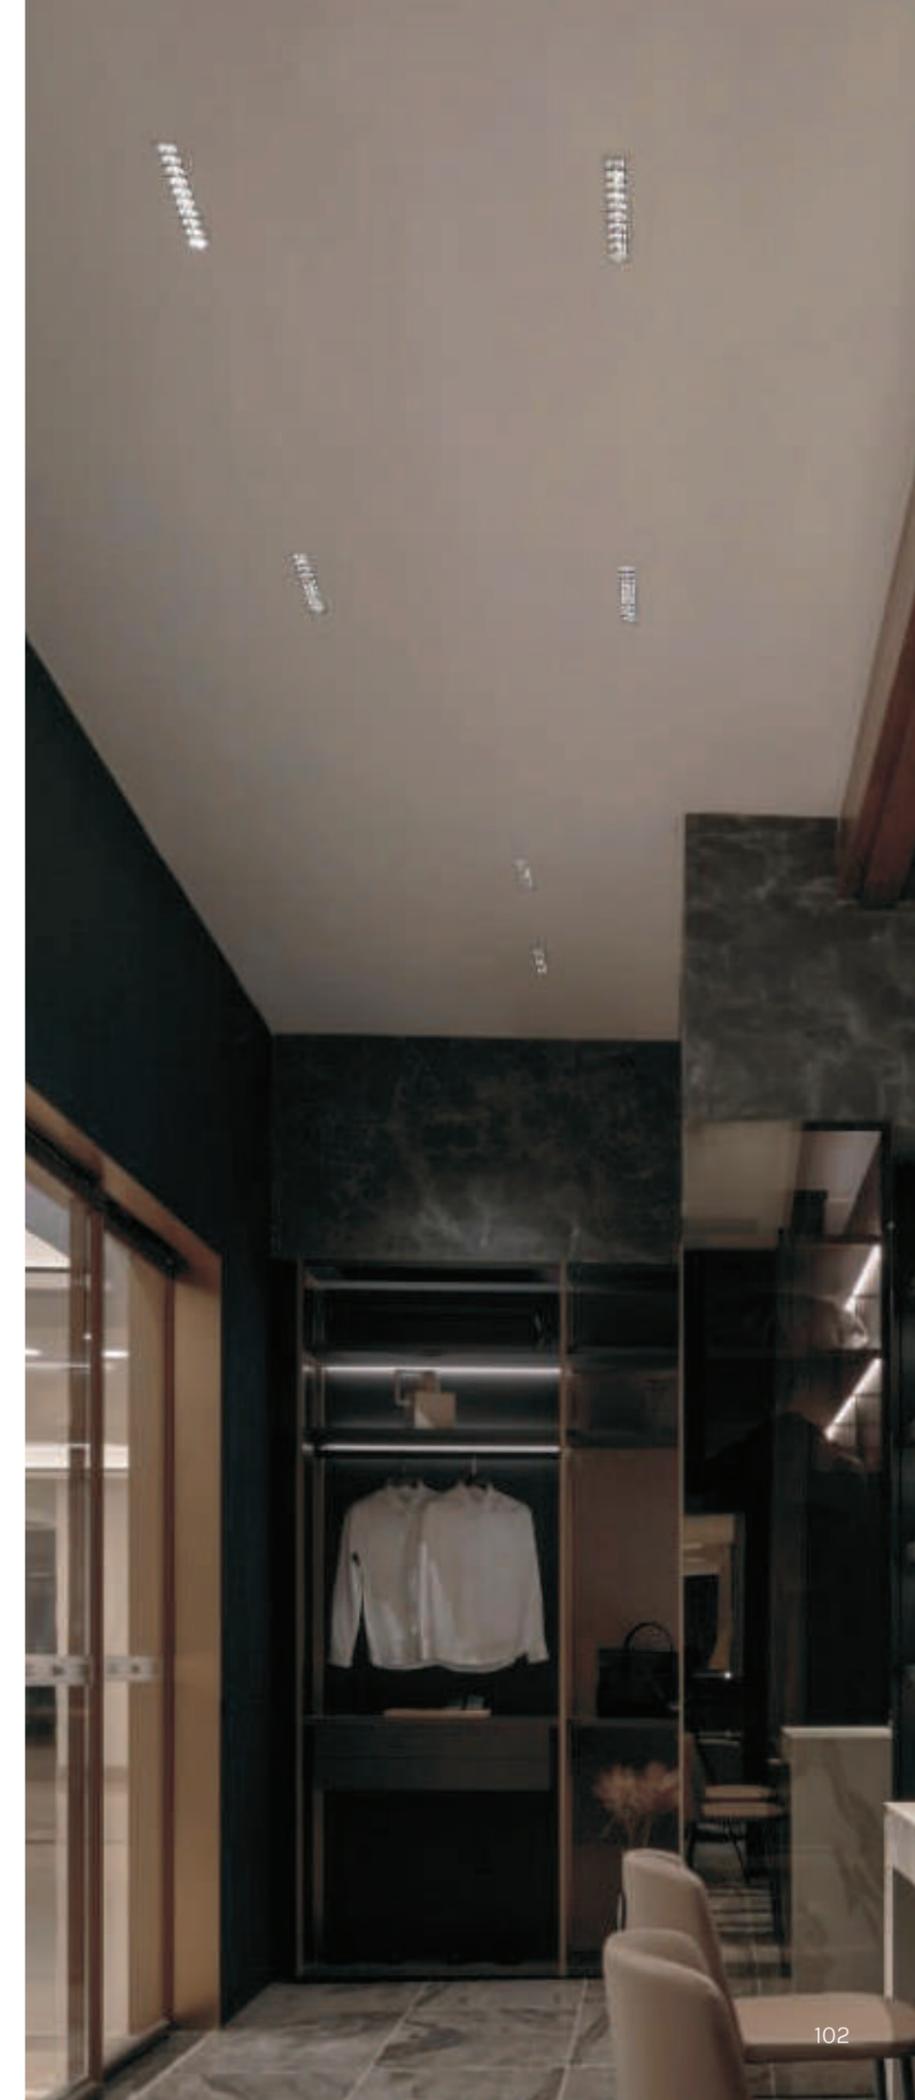
AI-37RET-241R
Trimless



LED RECESSED DOWNLIGHT

MODEL	AI-37RET-070R	AI-37RET-127R
DIMENSION (MM)		
CUTOUT (MM)	70X37	127X37
WATTAGE	6W	12W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	326 @ 3000K	652 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-

MODEL	AI-37RET-241R
DIMENSION (MM)	
CUTOUT (MM)	241X37
WATTAGE	20W
CCT	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1086 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-43ARE-078S
Adjustable



AI-43ARE-136S
Adjustable



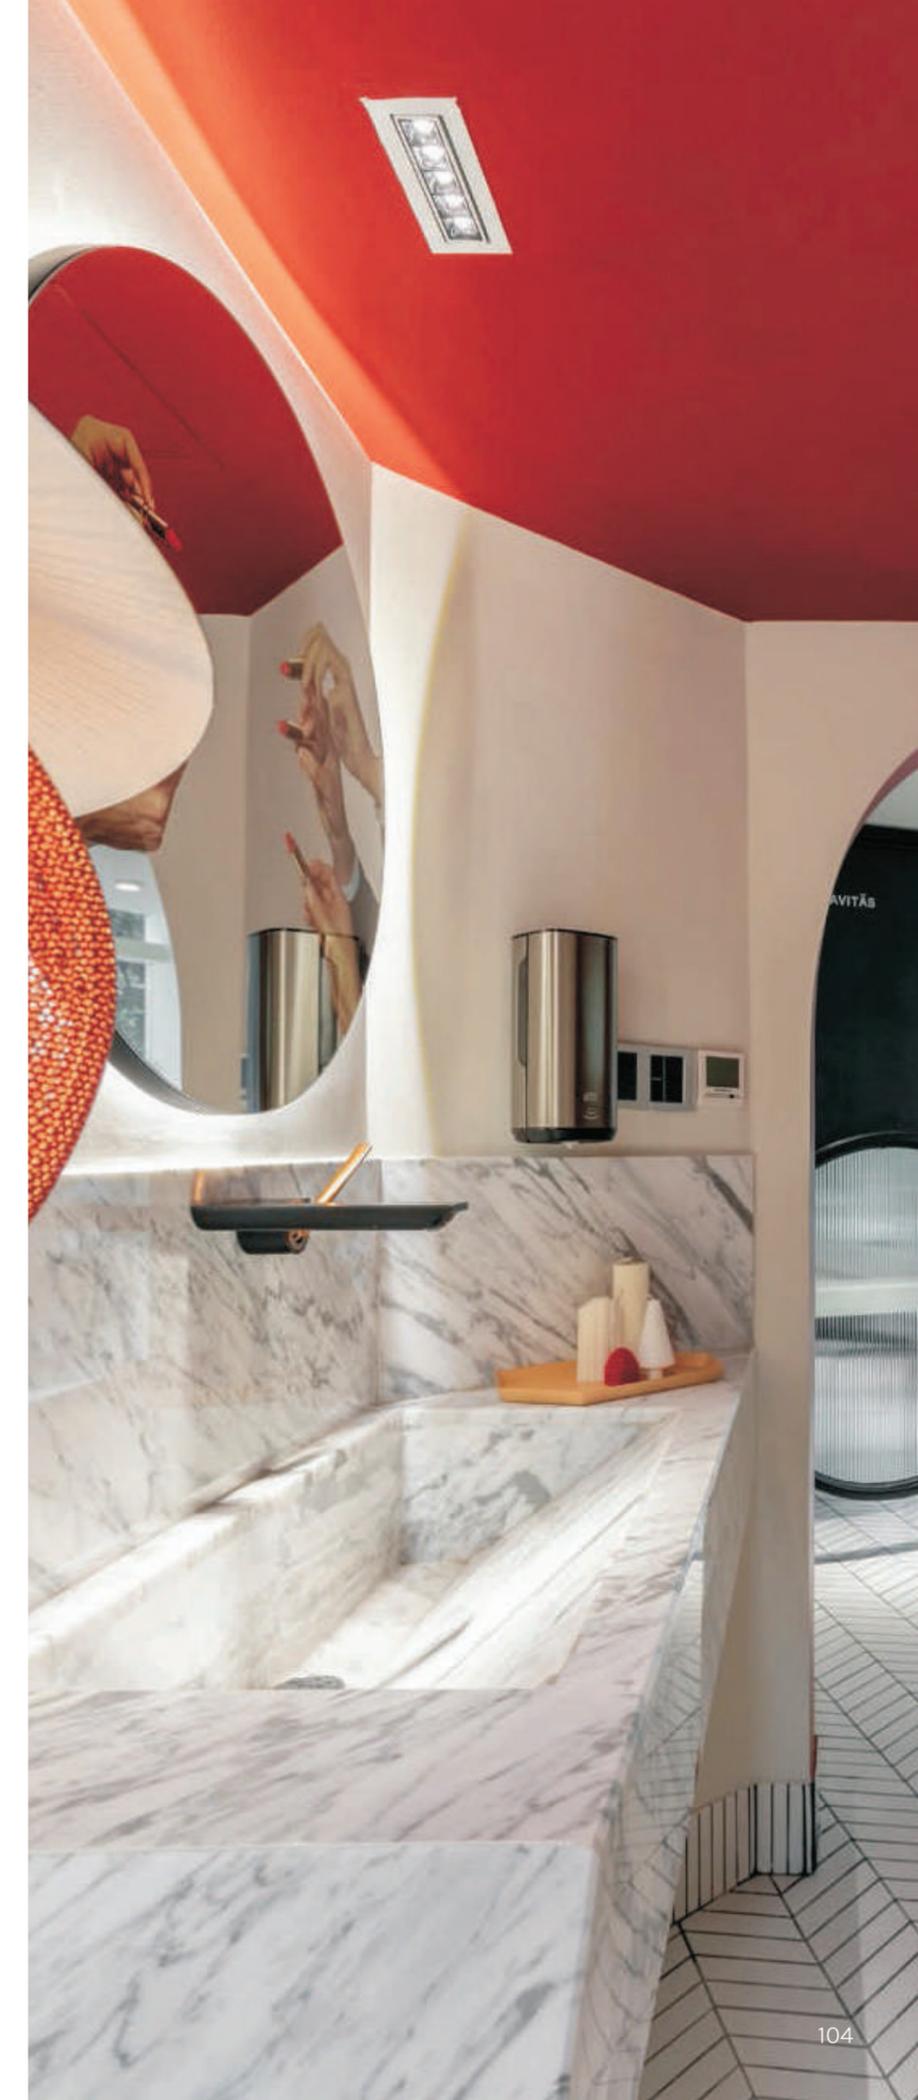
AI-43ARE-250S
Adjustable



LED RECESSED DOWNLIGHT

MODEL	AI-43ARE-078S	AI-43ARE-136S
DIMENSION (MM)		
CUTOUT (MM)	78X43	136X43
WATTAGE	9W	12W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	489 @ 3000K	652 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 Transparent BLACK	 Transparent BLACK
OPTICAL ACCESSORY	-	-

MODEL	AI-43ARE-250S
DIMENSION (MM)	
CUTOUT (MM)	250X43
WATTAGE	32W
CCT	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1086 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	 Transparent BLACK
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-43ARE-078R
Adjustable



AI-43ARE-136R
Adjustable



AI-43ARE-250R
Adjustable



LED RECESSED DOWNLIGHT

MODEL	AI-43ARE-078R	AI-43ARE-136R
DIMENSION (MM)		
CUTOUT (MM)	78X43	136X43
WATTAGE	9W	12W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	489 @ 3000K	652 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY	-	-

MODEL	AI-43ARE-250R
DIMENSION (MM)	
CUTOUT (MM)	250X43
WATTAGE	32W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000K (TUNABLE)
BEAM ANGLE	
CRI	>90
LUMEN OUTPUT	1086 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	
OPTICAL ACCESSORY	-



ALINE SERIES
LED DOWNLIGHT SYSTEM

AI-46ARE-083
Adjustable



AI-46ARE-113
Adjustable



AI-46ARE-173
Adjustable



AI-46ARE-323
Adjustable



LED RECESSED DOWNLIGHT

MODEL	AI-46ARE-083	AI-46ARE-113
DIMENSION (MM)		
CUTOUT (MM)	83X46	113X46
WATTAGE	6W	9W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	326 @ 3000K	489 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	AI-46ARE-173	AI-46ARE-323
DIMENSION (MM)		
CUTOUT (MM)	173X46	323X46
WATTAGE	15W	30W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000K (TUNABLE)	2700 - 6000K (TUNABLE)
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	755 @ 3000K	1630 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-





LED WALL LIGHT
ADA SERIES

ADA SERIES
LED WALL LIGHT



ADR-80S01



ADR-80S02



ADR-80S03



ADR-80R01



ADR-40R01



ADR-40S01



ADR-55R01



ADR-55S01

ADA SERIES

LED WALL LIGHT



ADR-AG35R01



ADR-AG40R01



ADR-AG40R02



ADR-AG65R01



ADR-RE044108



ADR-RE060160



ADR-RE044130



ADR-117R01

ADA SERIES

LED WALL LIGHT



ADR-200R01



ADT-RE070120



ADR-085S01



ADT-RE070120-G



ADR-117S01



ADT-RE040170



ADR-200S01



ADT-RE040170-G

ADA SERIES
LED WALL LIGHT

ADR-80S01
Technical Parameter



ADR-80S02
Technical Parameter



LED STEP LIGHT

MODEL	ADR-80S01	ADR-80S02
DIMENSION (MM)		
CUTOUT (MM)	80 x 80 x 50mm	80 x 80 x 50mm
SIZE (MM)	86 x 86 x 30	86 x 86 x 30
WATTAGE	1W	1W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	90°	90°
CRI	>90	>90
LUMEN OUTPUT	40 @ 3000K	40 @ 3000K
IP	IP20	IP20
LED	SMD2835	SMD2835
DIMMING	No	No
VOLTAGE	85 - 265V	85 - 265V
COLOR	White Black Gray	Brushed Nickel Champagne Gold
MATERIAL	PC	Stainless steel + steel

ADR-80S03
Technical Parameter



ADR-80R01
Technical Parameter



MODEL	ADR-80S03	ADR-80R01
DIMENSION (MM)		
CUTOUT (MM)	80 X 80 X 50MM	68 x 50mm
SIZE (MM)	86 X 86 X 50	90 x 40
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	10° - 90°	10° - 90°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP65	IP65
LED	CREEXPE	CreeXPE
DIMMING	NO	No
VOLTAGE	85 - 265V	85-265V
COLOR	WHITE BLACK GRAY	White Black Gray
MATERIAL	DIE-CAST ALUMINUM	Die-Cast Aluminum

ADA SERIES
LED WALL LIGHT

ADR-40R01
Technical Parameter




ADR-40S01
Technical Parameter





ADR-55R01
Technical Parameter





ADR-55S01
Technical Parameter



LED STEP LIGHT

MODEL	ADR-40R01	ADR-40S01
DIMENSION (MM)		
CUTOUT (MM)	40 x 60mm	40 x 60mm
SIZE (MM)	45 x 60	45 x 45 x 60
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 60°	 60°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP65	IP65
LED	CreeXPE	CreeXPE
DIMMING	No	No
VOLTAGE	85 - 265V	85 - 265V
COLOR	White Black Gray	White Black Gray
MATERIAL	Aluminum Alloy	Aluminum Alloy

MODEL	ADR-55R01	ADR-55S01
DIMENSION (MM)		
CUTOUT (MM)	55x60mm	55x60mm
SIZE (MM)	65 x 60	65 x 65 x 60
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 60°	 60°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP65	IP65
LED	CreeXPE	CreeXPE
DIMMING	No	No
VOLTAGE	85 - 265V	85 - 265V
COLOR	White Black Gray	White Black Gray
MATERIAL	Aluminum Alloy	Aluminum Alloy



ADA SERIES
LED WALL LIGHT

ADR-AG35R01
Technical Parameter



ADR-AG40R01
Technical Parameter





ADR-AG40R02
Technical Parameter





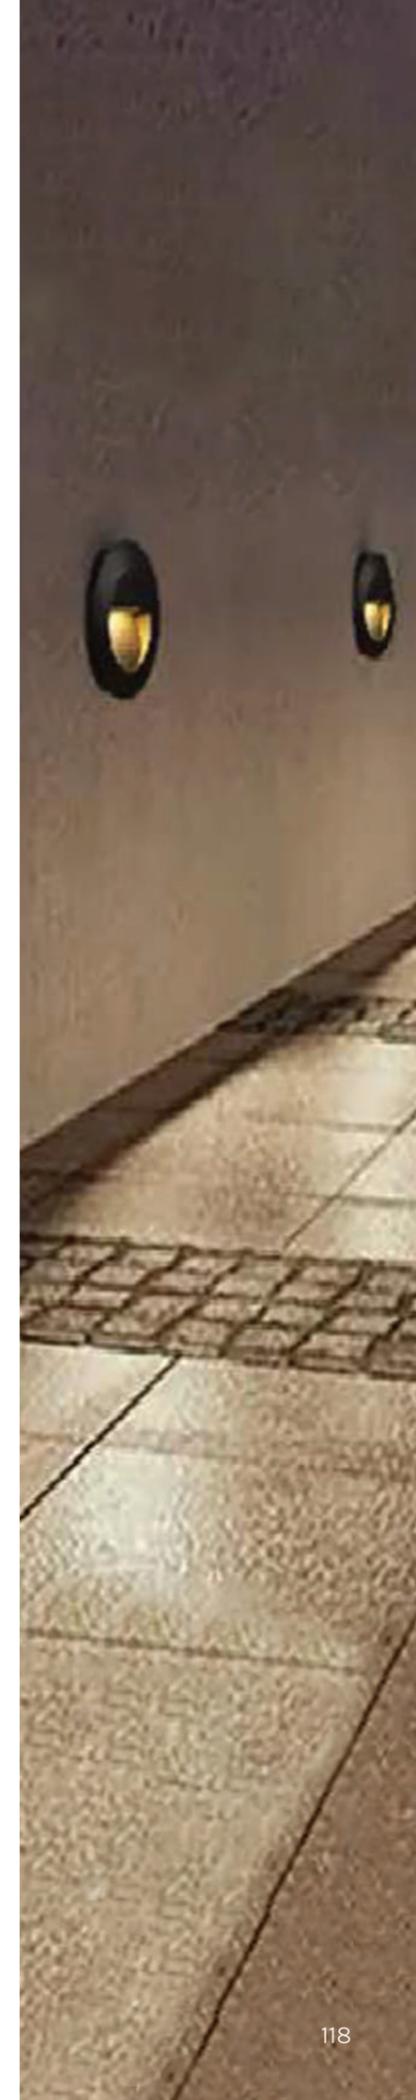
ADR-AG65R01
Technical Parameter



LED STEP LIGHT

MODEL	ADR-AG35R01	ADR-AG40R01
DIMENSION (MM)		
CUTOUT (MM)	30 X 55MM	40 x 60mm
SIZE (MM)	35 X 55	65 x 75
WATTAGE	1W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
LUMEN OUTPUT	40 @ 3000K	120 @ 3000K
IP	IP20	IP20
LED	SMD3535	SMD3535
DIMMING	NO	No
VOLTAGE	DC12V/24V	DC12V/24V
COLOR	SILVER	SILVER GRAY
MATERIAL	ALUMINUM ALLOY	Aluminum Alloy

MODEL	ADR-AG40R02	ADR-AG65R01
DIMENSION (MM)		
CUTOUT (MM)	40 x 60mm	65 X 55MM
SIZE (MM)	65 x 75	83 X 50
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP20	IP65
LED	SMD3535	SAN'ANCOB
DIMMING	No	NO
VOLTAGE	DC12V/24V	85-265V
COLOR	SILVER GRAY	WHITE BLACK GRAY
MATERIAL	Aluminum Alloy	DIE-CAST ALUMINUM



ADA SERIES
LED WALL LIGHT

ADR-RE044108
Technical Parameter



ADR-RE060160
Technical Parameter



ADR-RE044130
Technical Parameter



ADR-117R01
Technical Parameter



LED STEP LIGHT

MODEL	ADR-RE044108	ADR-RE060160
DIMENSION (MM)		
CUTOUT (MM)	108 x 44 x 55 mm	130 x 44 x 50 mm
SIZE (MM)	110 x 45 x 55	137 x 52 x 55
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP65	IP65
LED	San'anCOB	San'anCOB
DIMMING	No	No
VOLTAGE	85 - 265V	85 - 265V
COLOR	White Black Gray	White Black Gray
MATERIAL	Die-Cast Aluminum	Die-Cast Aluminum

MODEL	ADR-RE044130	ADR-117R01
DIMENSION (MM)		
CUTOUT (MM)	160 x 60 x 55 mm	117mm
SIZE (MM)	170 x 70 x 55	117 x 33
WATTAGE	6W	3W / 6W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
LUMEN OUTPUT	240 @ 3000K	120 @ 3000K / 240 @ 3000K
IP	IP65	IP65
LED	San'anCOB	San'anCOB
DIMMING	No	No
VOLTAGE	85 - 265V	85-265V
COLOR	White Black Gray	White Black Gray
MATERIAL	Die-Cast Aluminum	Die-Cast Aluminum



ADA SERIES
LED WALL LIGHT

ADR-200R01
Technical Parameter



ADS-085S01
Technical Parameter





ADS-117S01
Technical Parameter





ADS-200S01
Technical Parameter



LED STEP LIGHT

MODEL	ADR-200R01	ADS-085S01
DIMENSION (MM)		
CUTOUT (MM)	200mm	85mm
SIZE (MM)	200x33	85 x 85 x 33
WATTAGE	3W / 6W	3W / 6W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K / 240 @ 3000K	120 @ 3000K / 240 @ 3000K
IP	IP65	IP65
LED	San'anCOB	
DIMMING	No	No
VOLTAGE	85-265V	85-265V
COLOR	White Black Gray	White Black Gray
MATERIAL	Die-Cast Aluminum	Die-Cast Aluminum

MODEL	ADS-117S01	ADS-200S01
DIMENSION (MM)		
CUTOUT (MM)	117mm	200mm
SIZE (MM)	117 x 117 x 33	200 x 200 x 33
WATTAGE	3W / 6W	3W / 6W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K / 240 @ 3000K	120 @ 3000K / 240 @ 3000K
IP	IP65	IP65
LED		
DIMMING	No	No
VOLTAGE	85-265V	85-265V
COLOR	White Black Gray	White Black Gray
MATERIAL	Die-Cast Aluminum	Die-Cast Aluminum



ADA SERIES
LED WALL LIGHT



ADT-RE070120
Technical Parameter



ADT-RE070120-G
Technical Parameter



LED STEP LIGHT



MODEL	ADT-RE070120	ADT-RE070120-G
DIMENSION (MM)		
CUTOUT (MM)	70 x 120 x 47	70 x 120 x 47
SIZE (MM)	100x 145 x 48	100x 145 x 48
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP65	IP65
LED		
DIMMING	No	No
VOLTAGE		
COLOR	White Black	White Black
MATERIAL	Die-Cast Aluminum	Die-Cast Aluminum

ADT-RE040170
Technical Parameter



ADT-RE040170-G
Technical Parameter



MODEL	ADT-RE040170	ADT-RE040170-G
DIMENSION (MM)		
CUTOUT (MM)	70 x 120 x 47	70 x 120 x 47
SIZE (MM)	100 x 200 x 48	100 x 200 x 48
WATTAGE	3W	3W
CCT	3000K 3500K 4000K 5000K 6500K	3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	120 @ 3000K	120 @ 3000K
IP	IP65	IP65
LED		
DIMMING	No	No
VOLTAGE		
COLOR	White Black	White Black
MATERIAL	Die-Cast Aluminum	Die-Cast Aluminum





PROJECT : JEWELRY TRADE CENTER SILOM
INTERIOR DESIGNER : ARTI ARCHITECT
LIGHTING DESIGNER : PUNMA STUDIO
PRODUCT : ANN SERIES (AN85 R / IA8-RGBW-16.3W / CASAMBI)