

TRIPLE S TECHNOLOGY CO.,LTD

40/1 soi Pattanakarn20 yeak4, Pattanakarn rd,
Suanluang, Suanluang, Bangkok 10250

Tel. 02-318-2386-7

Fax. 02-318-2388

Email : sale@triple-s.co.th



R COLLECTION

2026. V1



R COLLECTION
SPOTLIGHT



R COLLECTION
SPOTLIGHT

R collection is designed for precision and adaptability, redefining the way you illuminate your space. Whether you're highlighting specific features, creating a dynamic ambiance, or enhancing task lighting, our LED tracklights offer the perfect solution. Experience the seamless integration of style and functionality as you explore our diverse range.

RICH REAL ROCKET ROME ROSE RIGA



220VAC TRACK SYSTEM
RICH SERIES

RICH SERIES
220VAC TRACK SYSTEM



RH55 ROUND



RH55 ZOOMABLE



RH70 ROUND



RH70 ZOOMABLE



RH85 ROUND



RH85 ZOOMABLE

RICH SERIES

220VAC TRACK SYSTEM



RH55 DOUBLE ASYMETRIC



RH55 WALL WASHER



RH70 DOUBLE ASYMETRIC



RH70 WALL WASHER



RH85 DOUBLE ASYMETRIC



RH85 WALL WASHER



RICH SERIES
LED SPOTLIGHT SYSTEM

RH55 ROUND
220VAC TRACK SYSTEM



RH70 ROUND
220VAC TRACK SYSTEM



RH85 ROUND
220VAC TRACK SYSTEM



SPOTLIGHT
ON TRACK SYSTEM

MODEL	RH55R	RH70R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	11W / 15W	23W / 27W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
BEAM ANGLE	 15° 20° 28° 50°	 16° 22° 34° 43°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRE / 4 WIRE / 6 WIRE	TRACK: 3 WIRE / 4 WIRE / 6 WIRE
LUMEN OUTPUT	800 @ 3000K / 1050 @ 3000K	2028 @ 3000K / 2319 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF 0/1-10V DALI	ON/OFF 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY		

MODEL	RH85R
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	35W / 40W
CCT	2700K 3000K 3500K 4000K
BEAM ANGLE	 21° 26° 36° 45°
CRI	>90
MOUNTING	TRACK: 3 WIRE / 4 WIRE / 6 WIRE
LUMEN OUTPUT	3165 @ 3000K / 3047 @ 3000K
IP	IP20
DIMMING	ON/OFF 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	



RICH SERIES
LED SPOTLIGHT SYSTEM

RH55 ZOOMABLE
220VAC TRACK SYSTEM



RH70 ZOOMABLE
220VAC TRACK SYSTEM



RH85 ZOOMABLE
220VAC TRACK SYSTEM




SPOTLIGHT
ON TRACK SYSTEM

MODEL	RH55ZR	RH70ZR
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	11W / 15W	23W / 27W
CCT	2700K 3300K 3500K 4000K	2700K 3000K 3500K 4000K
BEAM ANGLE	 15° - 36°	 15° - 36°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	921 @ 3000K / 1289 @ 3000K	2250 @ 3000K / 2631 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF 0/1-10V DALI COB LED	ON/OFF 0/1-10V DALI COB LED
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	 HONEYCOMB LOUVER OVAL DIFFUSER SOFT DIFFUSER SNOOT	 HONEYCOMB LOUVER OVAL DIFFUSER SOFT DIFFUSER SNOOT

MODEL	RH85ZR
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	27 / 35W
CCT	2700K 3000K 3500K 4000K
BEAM ANGLE	 15° - 36°
CRI	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	3527@ 3000K / 4115 @ 3000K
IP	IP20
DIMMING	ON/OFF 0/1-10V DALI COB LED
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	 HONEYCOMB LOUVER OVAL DIFFUSER SOFT DIFFUSER SNOOT



RICH SERIES
LED SPOTLIGHT SYSTEM



SPOTLIGHT
ON TRACK SYSTEM


MODEL

DIMENSION (MM)

RH55 DOUBLE ASYMETRIC
220VAC TRACK SYSTEM




RH55DAR3



RH70 DOUBLE ASYMETRIC
220VAC TRACK SYSTEM




RH70DAR3



RH85 DOUBLE ASYMETRIC
220VAC TRACK SYSTEM



RH85DAR3



CUTOUT (MM)	-	-
WATTAGE	11W / 15W	23W / 27W
CCT	2700K	2700K
	3000K	3000K
	3500K	3500K
	4000K	4000K

BEAM ANGLE	 26°	 26°
------------	---	--

CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	825 @ 3000K / 1155 @ 3000K	1682 @ 3000K / 1963 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF	ON/OFF
	0/1-10V	0/1-10V
	DALI	DALI
	COB LED	COB LED

COLOR	WHITE	WHITE
	BLACK	BLACK

ACCESSORY	-	-
-----------	---	---

OPTICAL ACCESSORY	 HONEYCOMB LOUVER  OVAL DIFFUSER  SOFT DIFFUSER  SNOOT	 HONEYCOMB LOUVER  OVAL DIFFUSER  SOFT DIFFUSER  SNOOT
-------------------	--	---

CUTOUT (MM)	-
WATTAGE	27 / 35W
CCT	2700K
	3000K
	3500K
	4000K

BEAM ANGLE	 26°
------------	---

CRI	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	2796 @ 3000K / 3410 @ 3000K
IP	IP20
DIMMING	ON/OFF
	0/1-10V
	DALI
	COB LED


COLOR	WHITE
	BLACK

ACCESSORY	-
-----------	---

OPTICAL ACCESSORY	 HONEYCOMB LOUVER  OVAL DIFFUSER  SOFT DIFFUSER  SNOOT
-------------------	--



RICH SERIES
LED SPOTLIGHT SYSTEM



SPOTLIGHT
ON TRACK SYSTEM

MODEL	RH55WWR3	RH70WWR3
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	11W / 15W	23W / 27W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
BEAM ANGLE		
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRSE / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	805 @ 3000K / 1127 @ 3000K	1859 @ 3000K / 2168 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF 0/1-10V DALI COB LED	ON/OFF 0/1-10V DALI COB LED
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY		

RH85 WALL WASHER
220VAC TRACK SYSTEM



MODEL	RH85WWR3
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	27 / 35W
CCT	2700K 3000K 3500K 4000K
BEAM ANGLE	
CRI	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	2923 @ 3000K / 3410 @ 3000K
IP	IP20
DIMMING	ON/OFF 0/1-10V DALI COB LED
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	





CEILING MOUNT

ROSE SERIES

ROSE SERIES

CEILING MOUNT



RO55 ROUND



RO65 ROUND



RO85 ROUND



RO96 ROUND

ROSE SERIES
LED SPOTLIGHT SYSTEM

R055 ROUND
CEILING MOUNT



R065 ROUND
CEILING MOUNT



R085 ROUND
CEILING MOUNT



R096 ROUND
CEILING MOUNT




CEILING MOUNT SPOTLIGHT

MODEL	R055	R065
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	8W / 10W	15W / 20W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (Tunable)	2700 - 6000 (Tunable)
BEAM ANGLE		
CRI	>90	>90
MOUNTING	-	-
LUMEN OUTPUT	716 @ 3000K / 813 @ 3000K	1209 @ 3000K / 1636 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 BLACK	 BLACK
OPTICAL ACCESSORY		

MODEL	R085	R096
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	25W / 30W	30W / 40W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (Tunable)	2700 - 6000 (Tunable)
BEAM ANGLE		
CRI	>90	>90
MOUNTING	-	-
LUMEN OUTPUT	2050 @ 3000K / 2427 @ 3000K	2995 @ 3000K / 3379 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 BLACK	 BLACK
OPTICAL ACCESSORY		



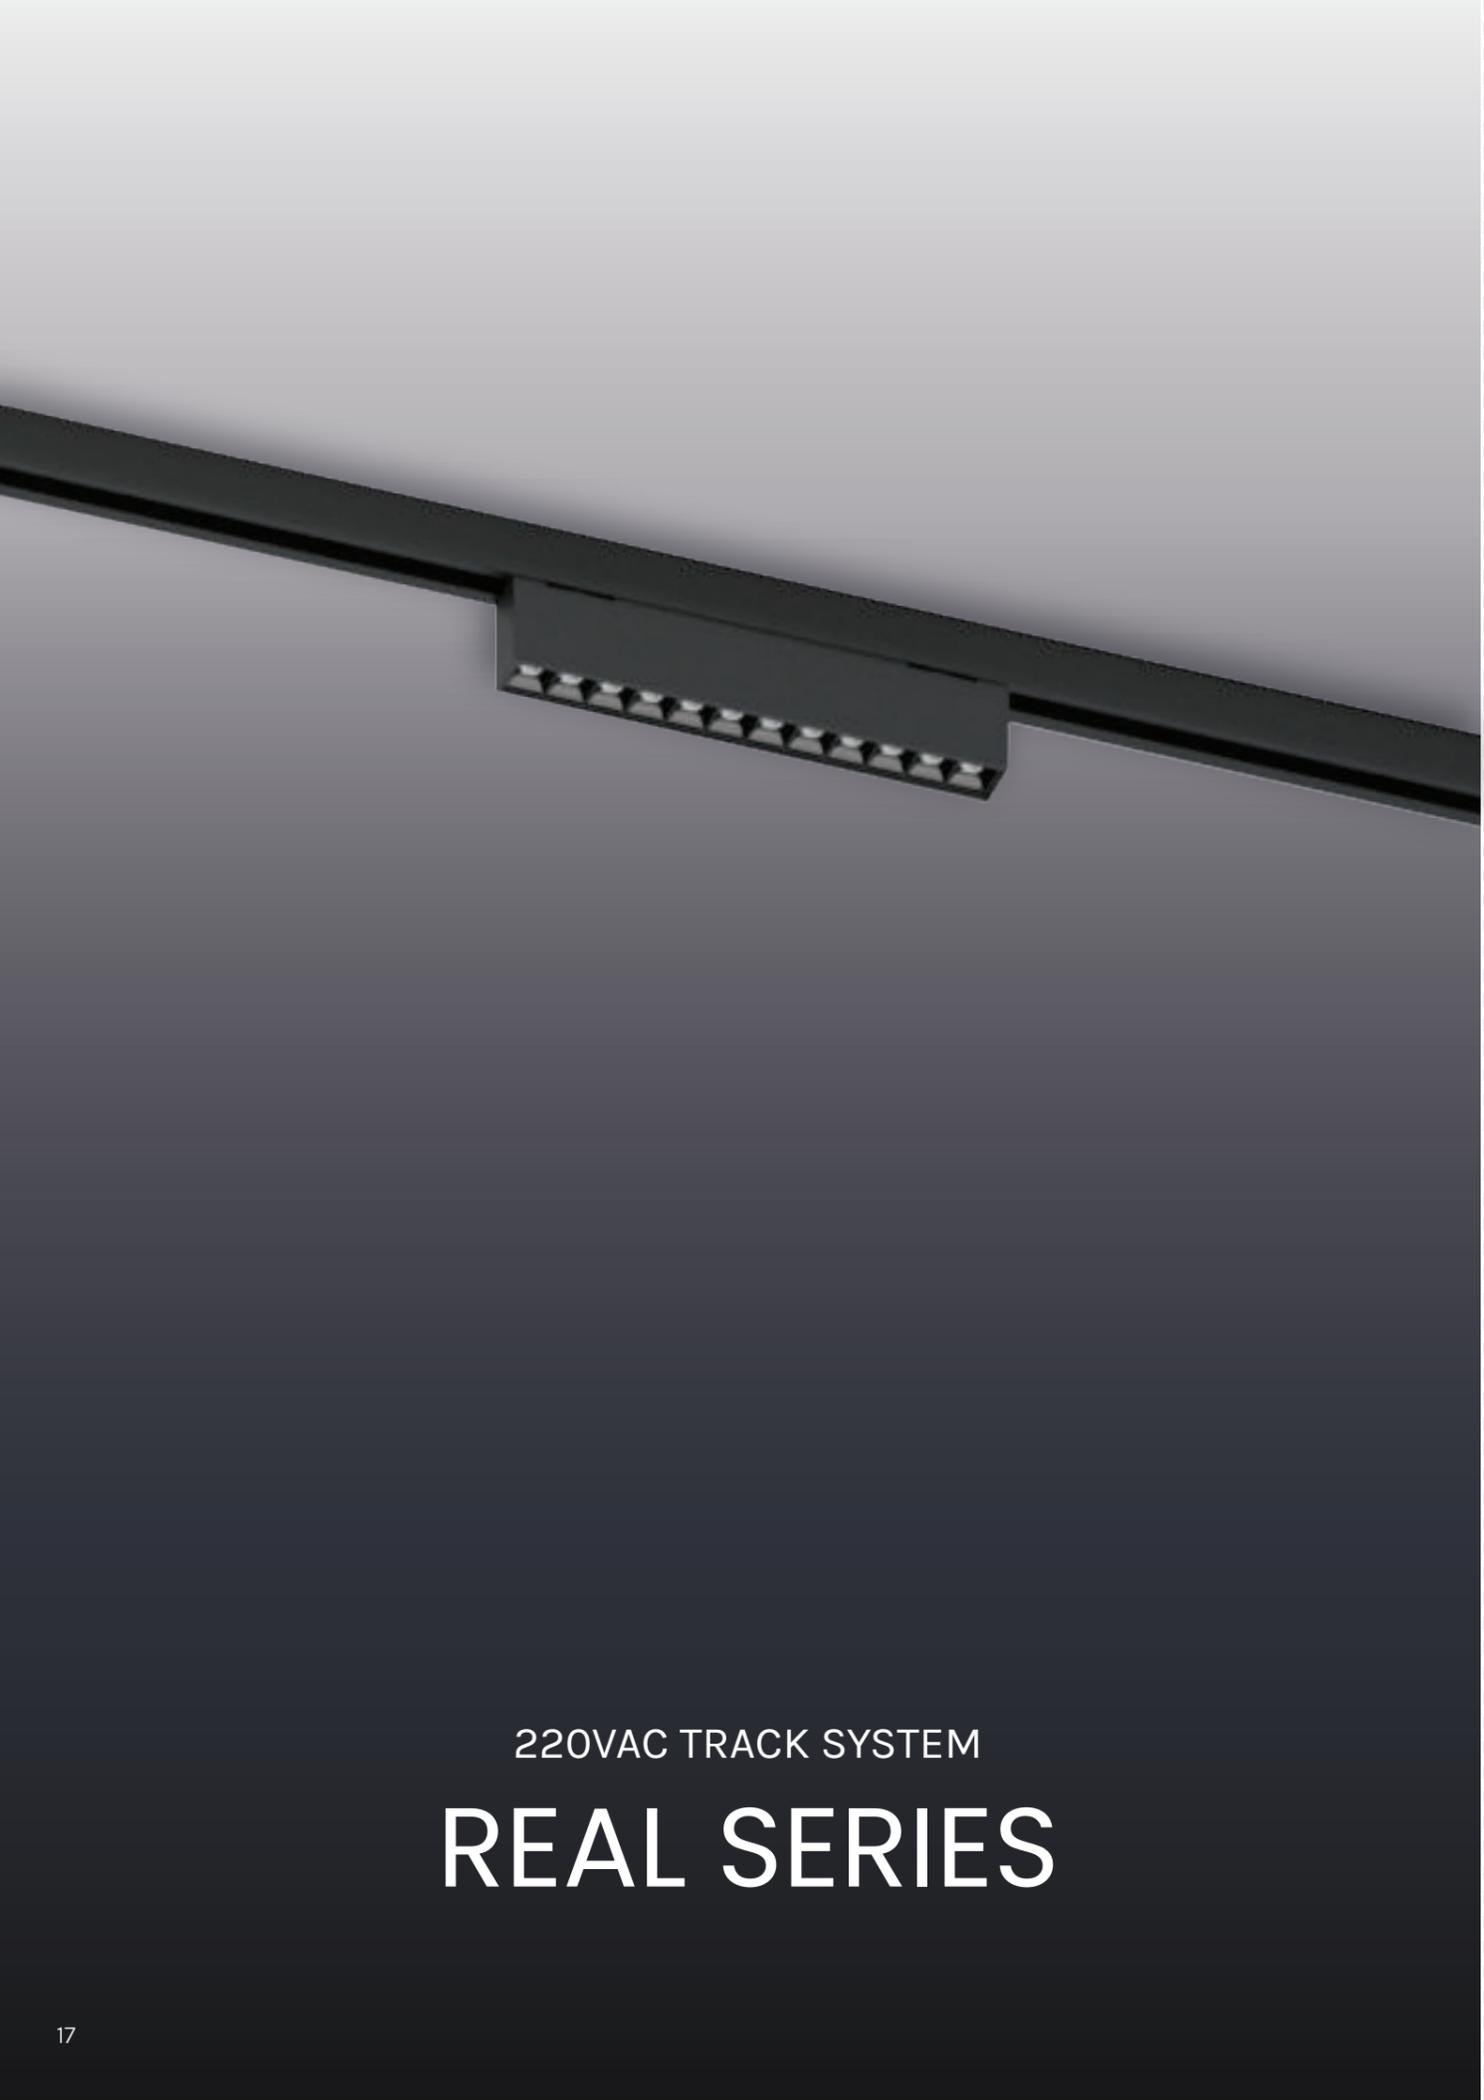

220VAC TRACK SYSTEM
REAL SERIES

REAL SERIES
220VAC TRACK SYSTEM



RL328 ACCENT



RL328 GENERAL



RL646 ACCENT



RL646 GENERAL



RL964 ACCENT



RL964 GENERAL

REAL SERIES

220VAC SURFACE MOUNT



RL328 ACCENT



RL328 GENERAL



RL646 ACCENT



RL646 GENERAL



RL964 ACCENT



RL964 GENERAL



REAL SERIES
LED SPOTLIGHT SYSTEM

RL328 ACCENT
220VAC TRACK SYSTEM



RL646 ACCENT
220VAC TRACK SYSTEM




RL964 ACCENT
220VAC TRACK SYSTEM



ACCENT TRACKLIGHT

MODEL	RL328	RL646
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	15W	30W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE		
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	1300 @ 3000K	2400 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	RL964
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	40W
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	
CRI	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	3150 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-



REAL SERIES
LED SPOTLIGHT SYSTEM

RL328 GENERAL
220VAC TRACK SYSTEM





RL646 GENERAL
220VAC TRACK SYSTEM




RL964 GENERAL
220VAC TRACK SYSTEM



GENERAL TRACKLIGHT

MODEL	RL328	RL646
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	15W	30W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	1150 @ 3000K	2235 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	RL964
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	40W
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	 90°
CRI	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	IP20
IP	ON/OFF
DIMMING	PHASE 0/1-10V DALI
COLOR	WHITE BLACK -
ACCESSORY	-
OPTICAL ACCESSORY	-



REAL SERIES
LED SPOTLIGHT SYSTEM

RL328 ACCENT
SURFACE MOUNT



RL646 ACCENT
SURFACE MOUNT





RL964 ACCENT
SURFACE MOUNT



ACCENT LINEAR LIGHT

MODEL	RL328	RL646
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	15W	30W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE		
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	1300 @ 3000K	2400 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	RL964
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	40W
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	
CRI	>90
MOUNTING	SURFACE
LUMEN OUTPUT	3150 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-

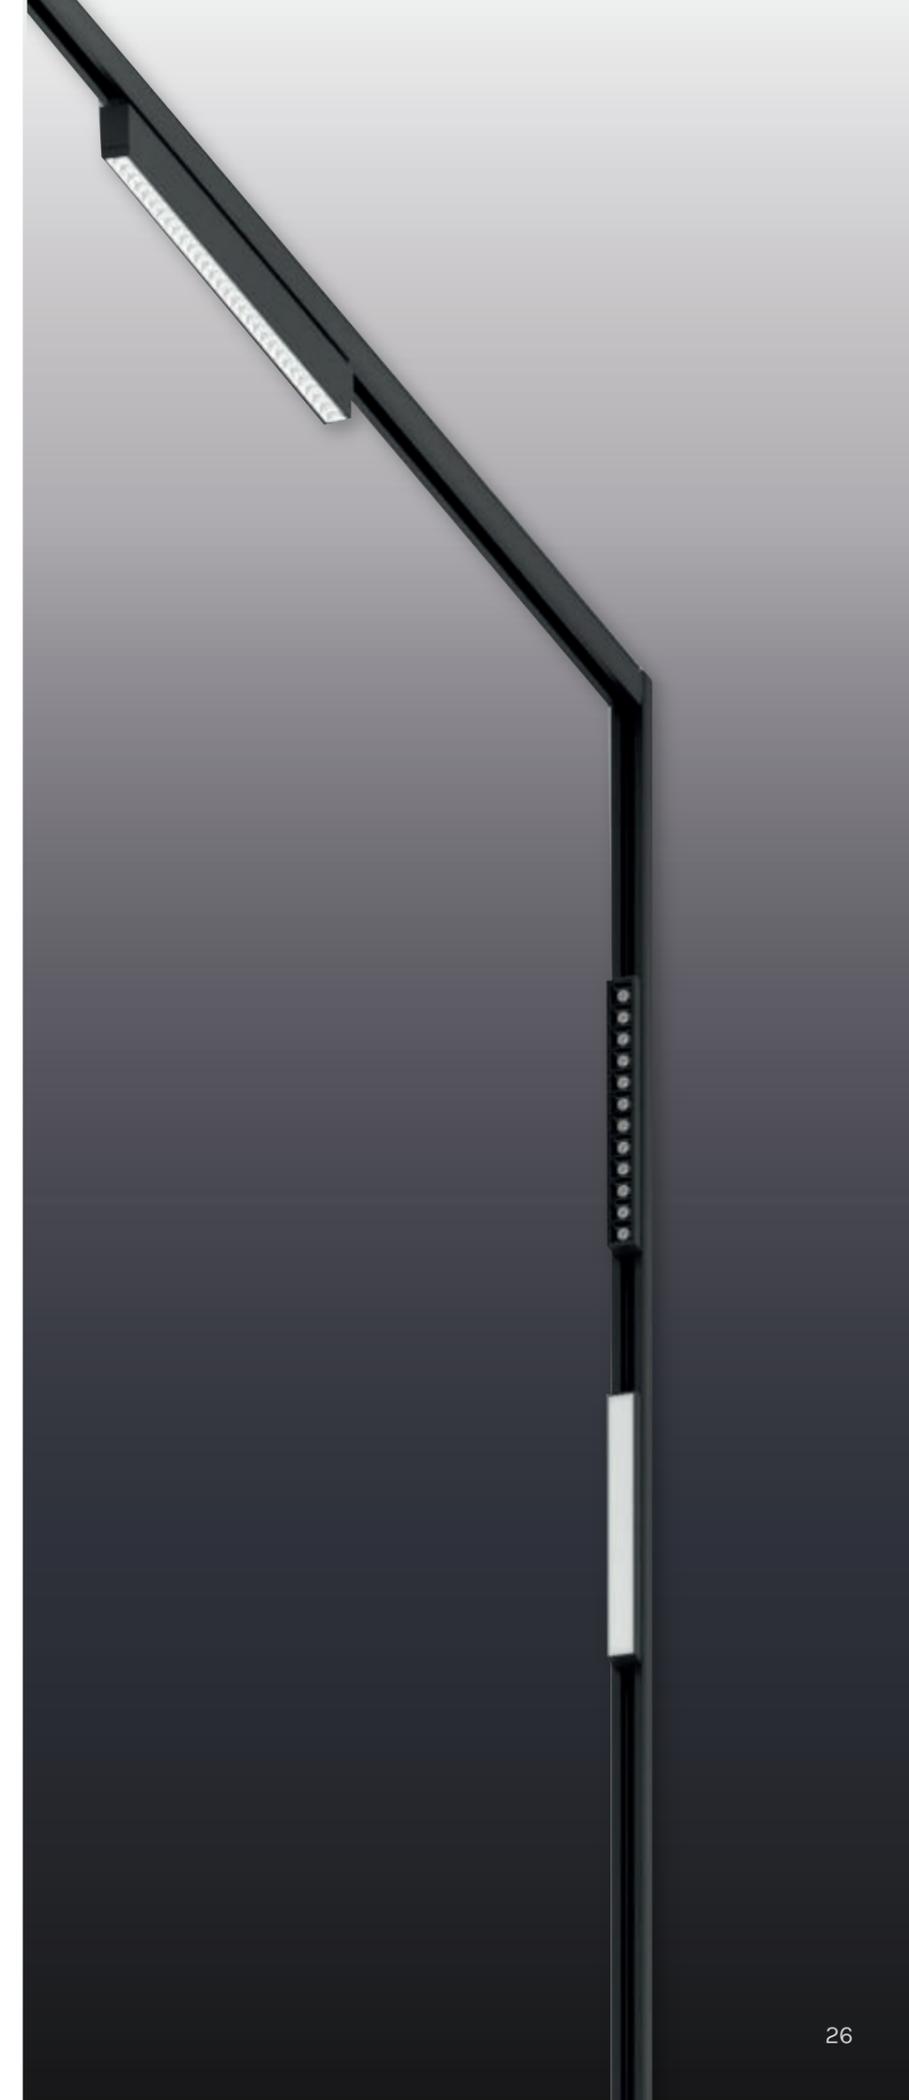

REAL SERIES
LED SPOTLIGHT SYSTEM

RL328 GENERAL
SURFACE MOUNT




RL646 GENERAL
SURFACE MOUNT




RL964 GENERAL
SURFACE MOUNT



GENERAL LINEAR LIGHT

MODEL	RL328	RL646
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	15W	30W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	 90°	 90°
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	1150 @ 3000K	2235 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	RL964
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	40W
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	 90°
CRI	>90
MOUNTING	SURFACE
LUMEN OUTPUT	3100 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK
ACCESSORY	-
OPTICAL ACCESSORY	-





220VAC TRACK SYSTEM
ROME SERIES

ROME SERIES
220VAC TRACK SYSTEM



RE55 ROUND



RE65 ROUND



RE85 ROUND



RE96 ROUND



RE65 COVE



RE76 COVE

ROME SERIES
LED SPOTLIGHT SYSTEM

RE55 ROUND
220VAC TRACK SYSTEM



RE65 ROUND
220VAC TRACK SYSTEM



RE85 ROUND
220VAC TRACK SYSTEM



RE96 ROUND
220VAC TRACK SYSTEM



SPOTLIGHT
ON TRACK SYSTEM

MODEL	RE55R	RE65R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	8W / 10W	15W / 20W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (Tunable) 	2700 - 6000 (Tunable)
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	716 @ 3000K / 813 @ 3000K	1209 @ 3000K / 1636 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 BLACK	 BLACK
OPTICAL ACCESSORY		

MODEL	RE85R	RE96R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	25W / 30W	35W / 40W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (Tunable) 	2700 - 6000 (Tunable)
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	2050 @ 3000K / 2427 @ 3000K	2995 @ 3000K / 3379 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	 BLACK	 BLACK
OPTICAL ACCESSORY		



ROME SERIES
LED SPOTLIGHT SYSTEM

RE65 COVE
220VAC TRACK SYSTEM

RE76 COVE
220VAC TRACK SYSTEM



SPOTLIGHT
ON TRACK SYSTEM

MODEL	RE65R	RE76R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	15W / 20W	25W / 30W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (Tunable) 	2700 - 6000 (Tunable)
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	1209 @ 3000K / 1636 @ 3000K	1718 @ 3000K / 2160 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		





CEILING MOUNT

RIGA SERIES

RIGA SERIES

CEILING MOUNT



RG55 ROUND



RG65 ROUND



RG85 ROUND



RG96 ROUND



RG115 ROUND



RG140 ROUND



RG170 ROUND



RG185 ROUND

RIGA SERIES

CEILING MOUNT



RG60 SQUARE



RG75 SQUARE



RIGA SERIES
LED SPOTLIGHT SYSTEM

RG55 ROUND
CEILING MOUNT



RG65 ROUND
CEILING MOUNT



RG85 ROUND
CEILING MOUNT



RG96 ROUND
CEILING MOUNT



CEILING MOUNT DOWNLIGHT

MODEL	RG55R	RG65R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	8W / 12W	8W / 12W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (Tunable)	2700 - 6000 (Tunable)
BEAM ANGLE		
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	716 @ 3000K / 1068 @ 3000K	716 @ 3000K / 1068 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		

MODEL	RG85R	RG96R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	12W / 15W	20W / 25W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
	2700 - 6000 (TUNABLE)	2700 - 6000 (Tunable)
BEAM ANGLE		
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	1102 @ 3000K / 1247 @ 3000K	1732 @ 3000K / 2165 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		



PROJECT : GAYSON AMARIN (GAYSON VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : ARIS LIGHTING

RIGA SERIES
LED SPOTLIGHT SYSTEM

RG115 ROUND
CEILING MOUNT



RG140 ROUND
CEILING MOUNT



CEILING MOUNT DOWNLIGHT

MODEL	RG115R	RG140R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	30W	35W / 40W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (Tunable) 	2700 - 6000 (Tunable)
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	2554 @ 3000K	3995 @ 3000K / 3329 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		


RG170 ROUND
CEILING MOUNT



RG185 ROUND
CEILING MOUNT



MODEL	RG170R	RG185R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	50W / 60W	80W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	2700 - 6000 (Tunable) 	2700 - 6000 (Tunable)
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	4200 @ 3000K / 5040 @ 3000K	6321 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		

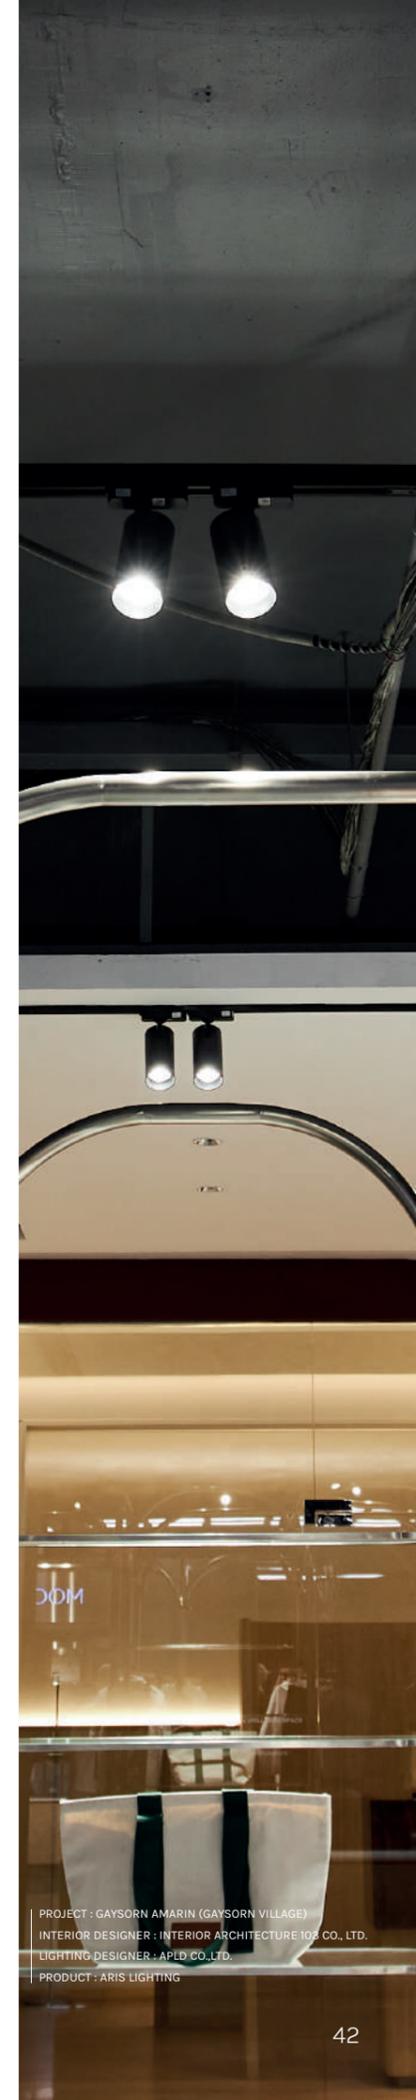

PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 102 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : ARIS LIGHTING



RIGA SERIES
LED SPOTLIGHT SYSTEM

RG60 SQUARE
CEILING MOUNT

RG75 SQUARE
CEILING MOUNT



CEILING MOUNT DOWNLIGHT

MODEL	RG60S	RG75S
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	8W / 12W	12W / 15W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000 (Tunable)	2700K 3000K 3500K 4000K 5000K 2700 - 6000 (Tunable)
BEAM ANGLE		
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	654 @ 3000K / 981 @ 3000K	317 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY		
OPTICAL ACCESSORY		





ADJUSTABLE
RODI SERIES

RODI SERIES
ADJUSTABLE



RD65 ROUND



RD85 ROUND



RD96 ROUND



RD115 ROUND



RD70 SQUARE



RD100 SQUARE



RD120 SQUARE

RODI SERIES
LED SPOTLIGHT SYSTEM

RD65 ROUND
ADJUSTABLE



RD85 ROUND
ADJUSTABLE



ADJUSTABLE

MODEL	RD65R	RD85R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	8W / 10W	11W / 13W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K

BEAM ANGLE	RD65R	RD85R

CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	545 @ 3000K / 668 @ 3000K	751 @ 3000K / 878 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK

ACCESSORY

OPTICAL ACCESSORY



RD96 ROUND
ADJUSTABLE



RD115 ROUND
ADJUSTABLE



MODEL	RD96R	RD115R
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	20W / 25W	30W / 35W
CCT	2700K 3000K 3500K 4000K 5000K	2700K 3000K 3500K 4000K 5000K

BEAM ANGLE	RD96R	RD115R

CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	1617 @ 3000K / 1940 @ 3000K	2548 @ 3000K / 2981 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK



RODI SERIES
LED SPOTLIGHT SYSTEM

RD70 SQUARE
ADJUSTABLE



RD100 SQUARE
ADJUSTABLE



RD120 SQUARE
ADJUSTABLE




ADJUSTABLE


MODEL	RD70S	RD100S
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	8W / 10W	20W / 25W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000 (Tunable)	2700K 3000K 3500K 4000K 5000K 2700 - 6000 (Tunable)
BEAM ANGLE		
CRI	>90	>90
MOUNTING	SURFACE	SURFACE
LUMEN OUTPUT	716 @ 3000K / 1068 @ 3000K	716 @ 3000K / 1068 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK	WHITE BLACK

ACCESSORY

OPTICAL ACCESSORY



MODEL	RD120S
DIMENSION (MM)	
CUTOUT (MM)	-
WATTAGE	30W / 35W
CCT	2700K 3000K 3500K 4000K 5000K 2700 - 6000 (TUNABLE)
BEAM ANGLE	
CRI	>90
MOUNTING	SURFACE
LUMEN OUTPUT	1102 @ 3000K / 1247 @ 3000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI
COLOR	WHITE BLACK

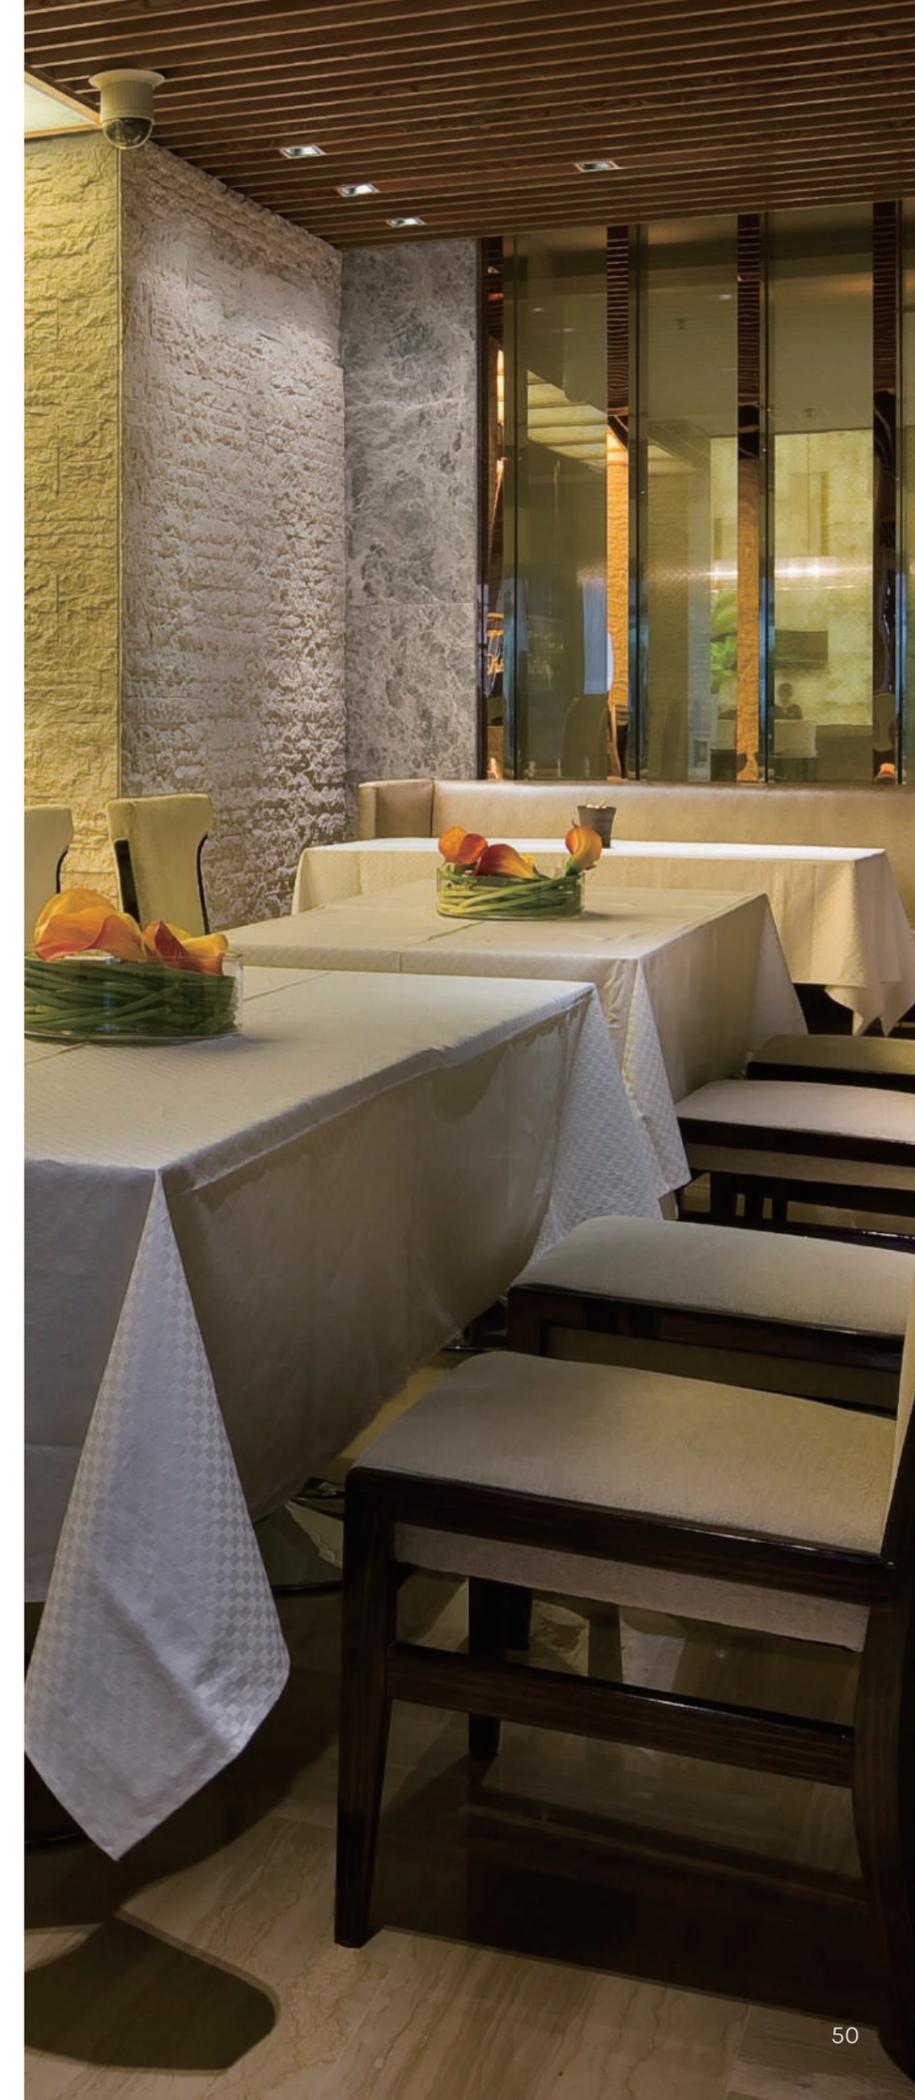



220VAC TRACK SYSTEM SURFACE MOUNT

ROCKET SERIES

ROCKET SERIES

220VAC TRACK SYSTEM
SURFACE MOUNT



RK65F
Fixed Angle



RK65FZ
Zoomable



RK75F
Fixed Angle



RK75FZ
Zoomable



RK85F
Fixed Angle



RK85FZ
Zoomable



RK95F
Fixed Angle



RK95FZ
Zoomable

ROCKET SERIES
LED SPOTLIGHT SYSTEM

RK65F
220VAC TRACK SYSTEM / SURFACE MOUNT
FIXED ANGLE



RK75F
220VAC TRACK SYSTEM / SURFACE MOUNT
FIXED ANGLE



RK85F
220VAC TRACK SYSTEM / SURFACE MOUNT
FIXED ANGLE



RK95F
220VAC TRACK SYSTEM / SURFACE MOUNT
FIXED ANGLE



FRAMING SPOTLIGHT

MODEL	RK65F	RK75F
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	10W	20W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 55°	 55°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRE / 6 WIRE	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	300-350 @ 3000K	745-780 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	RK85F	RK95F
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	28W	37W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 55°	 55°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	3TRACK: WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	1050-1150@ 3000K	1110-1200 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



ROCKET SERIES

LED SPOTLIGHT SYSTEM

RK65FZ

220VAC TRACK SYSTEM / SURFACE MOUNT
ZOOMABLE



RK75FZ

220VAC TRACK SYSTEM / SURFACE MOUNT
ZOOMABLE



RK85FZ

220VAC TRACK SYSTEM / SURFACE MOUNT
ZOOMABLE



RK95FZ

220VAC TRACK SYSTEM / SURFACE MOUNT
ZOOMABLE



FRAMING SPOTLIGHT

MODEL	RK65FZ	RK75FZ
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	10W	20W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 15°-36°	 15°-36°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRE / 6 WIRE	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	300-350 @ 3000K	630-650 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	RK85FZ	RK95FZ
DIMENSION (MM)		
CUTOUT (MM)	-	-
WATTAGE	28W	37W
CCT	2700K 3000K 4000K	2700K 3000K 4000K
BEAM ANGLE	 15°-36°	 15°-36°
CRI	>90	>90
MOUNTING	TRACK: 3 WIRES / 4 WIRES / 6 WIRES	TRACK: 3 WIRES / 4 WIRES / 6 WIRES
LUMEN OUTPUT	870-1000 @ 3000K	1000-1200 @ 3000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER	ON/OFF PHASE 0/1-10V DALI CASAMBI DRIVER
COLOR	WHITE BLACK	WHITE BLACK
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-




TRACK SYSTEM SERIES


220VAC

220VAC


TRACK SYSTEM SERIES




ST3
3 Wire TRACK




RT3
Recessed 3 Wire Track




ST4
4 Wire TRACK



RT4
Recessed 4 Wire Track



ST6
6 Wire TRACK



RT6
Recessed 6 Wire Track

220VAC
LED SPOTLIGHT SYSTEM

3 WIRE SURFACE
MOUNTED TRACK



3 WIRE RECESSED
MOUNTED TRACK

4 WIRE SURFACE
MOUNTED TRACK

4 WIRE RECESSED
MOUNTED TRACK





MODEL	ST3	RT3
MOUNTING	TRACK: 3 WIRES TRACK	TRACK: 3 WIRES TRACK
TRACK LENGTH (MM)	1000/2000/3000/4000	1000/2000/3000/4000
PROFILE MATERIAL	ALUMINUM EXTRUSION	ALUMINUM EXTRUSION
COLOR	WHITE BLACK SILVER	WHITE BLACK SILVER




ACCESSORY	ST3	RT3
LIVE-END CONNECTOR		
END CAP		
MINI JOINER		

MODEL	ST4	RT4
MOUNTING	TRACK: 4 WIRES TRACK	TRACK: 4 WIRES TRACK
TRACK LENGTH (MM)	1000/2000/3000/4000	1000/2000/3000/4000
PROFILE MATERIAL	ALUMINUM EXTRUSION	ALUMINUM EXTRUSION
COLOR	WHITE BLACK SILVER	WHITE BLACK SILVER



ACCESSORY	ST4	RT4
3 CIRCUITS ADAPTOR-SMART		
LIVE-END CONNECTOR		
END CAP		
MINI JOINER		
L CONNECTOR COVER		
T CONNECTOR COVER		
+ CONNECTOR COVER		
TWISTED T CONNECTOR		
TWISTED L CONNECTOR		

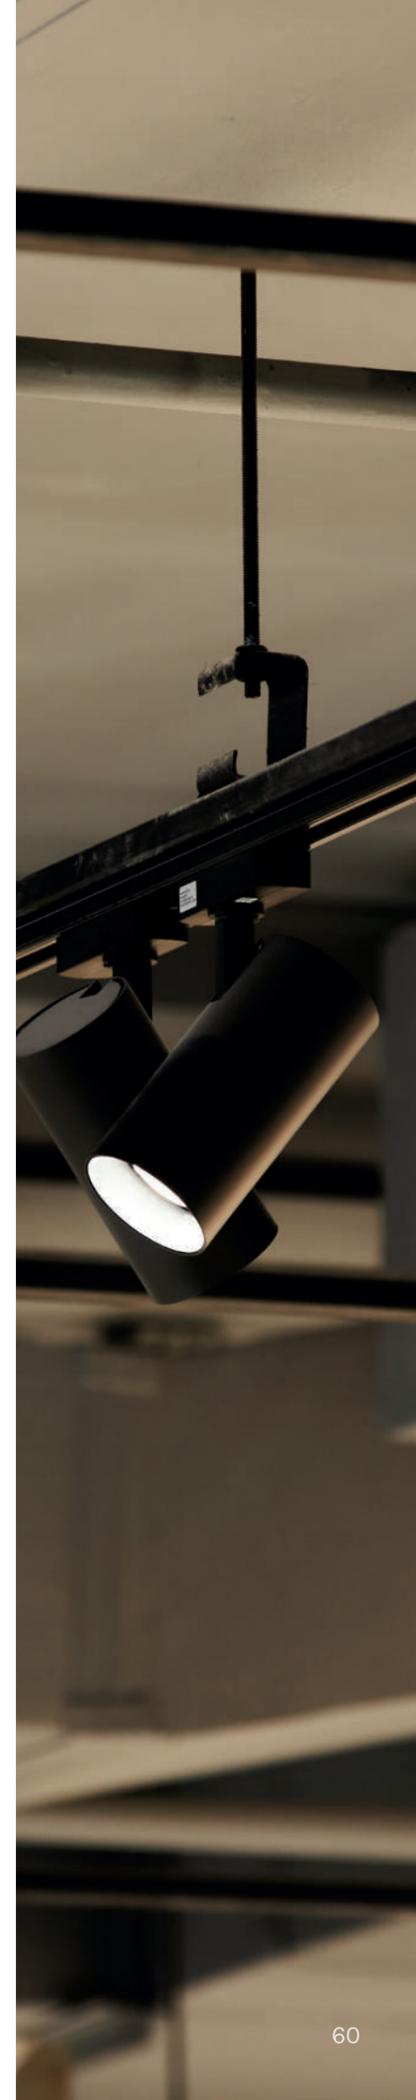

220VAC
LED SPOTLIGHT SYSTEM

6 WIRE SURFACE
MOUNTED TRACK

6 WIRE RECESSED
MOUNTED TRACK



MODEL	ST6	RT6
TRACK	TRACK: 6 WIRES TRACK	TRACK: 6 WIRES TRACK
TRACK LENGTH (MM)	1000/2000/3000/4000	1000/2000/3000/4000
PROFILE MATERIAL	ALUMINUM EXTRUSION	ALUMINUM EXTRUSION
COLOR	WHITE BLACK SILVER	WHITE BLACK SILVER

ACCESSORY	ST6	RT6
LIVE-END CONNECTOR		
END CAP		
MINI JOINER		STRAIGHT CONNECTOR
L CONNECTOR COVER		L CONNECTOR COVER
T CONNECTOR COVER		T CONNECTOR COVER
+ CONNECTOR COVER		+ CONNECTOR COVER
TWISTED T CONNECTOR		
TWISTED L CONNECTOR		





THAI CRAFTSMAN
THAI ARTISAN
THAI DESIGNER

PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING