

TRIPLE S TECHNOLOGY CO.,LTD

40/1 soi Pattanakarn20 yeak4, Pattanakarn rd,
Suanluang, Suanluang, Bangkok 10250

Tel. 02-318-2386-7

Fax. 02-318-2388

Email : sale@triple-s.co.th



i COLLECTION

2026. VI




i COLLECTION
LINEAR



i COLLECTION
LINEAR

i collection embraces the new era of contemporary lighting with our LED linear light offerings. Engineered for both aesthetics and functionality, these linear lighting solutions effortlessly elevate your space. Immerse yourself in the clean lines and uniform illumination our LED linear lights provide, offering a modern touch to any environment.

iLLO iNK iDEA iBIS iMO iSIS iA iN iPRO+

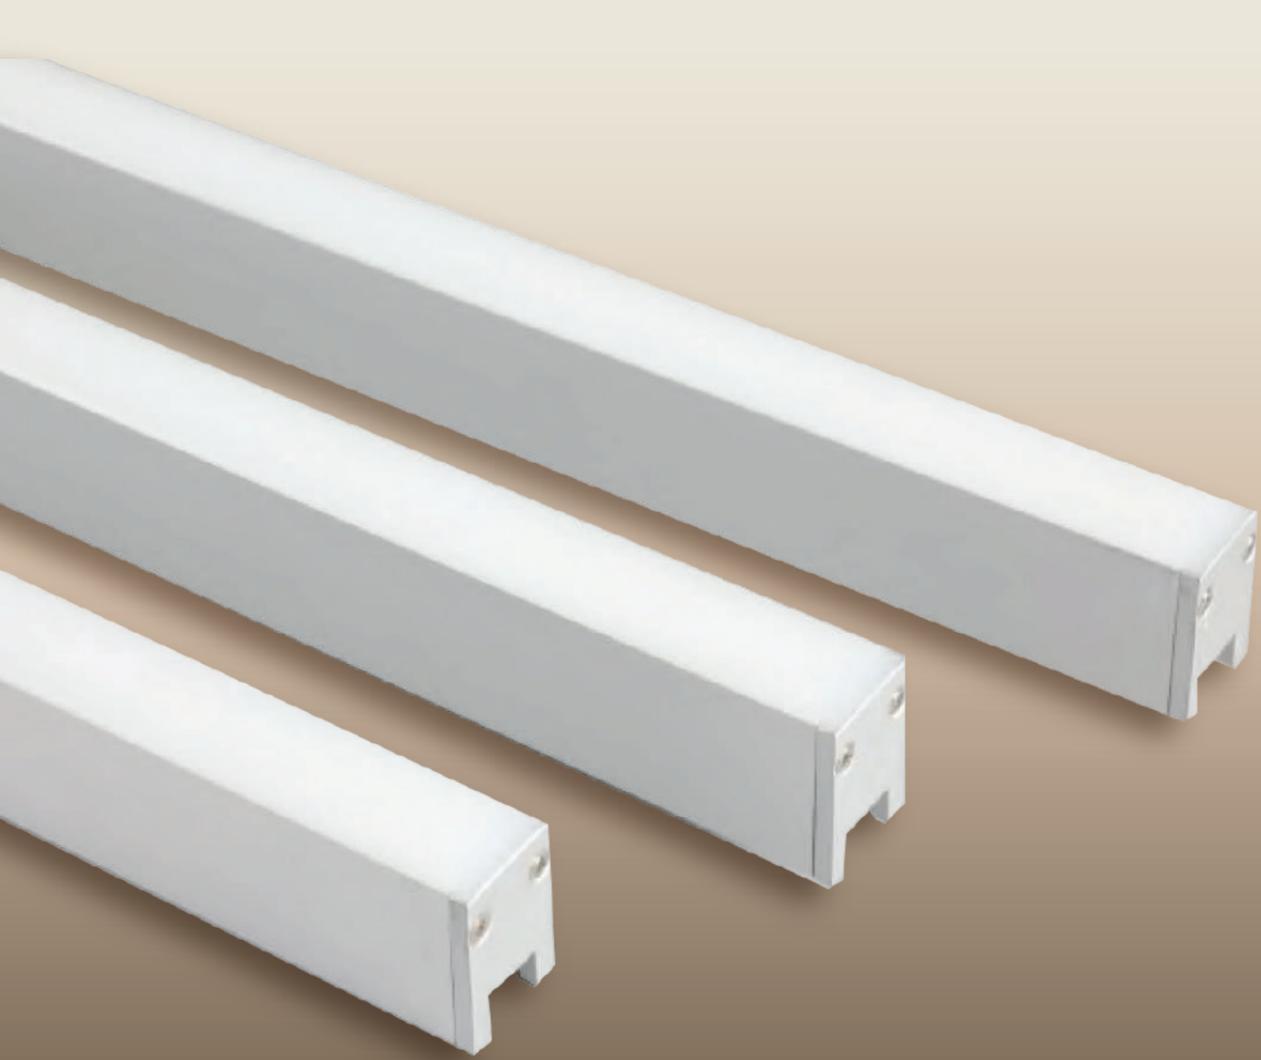

24VDC LINEAR
iLLO SERIES

iLLO SERIES
24VDC LINEAR



iL 304



iL 609



iL 1000



iL 1220

iLLO SERIES
LED LINEAR SYSTEM

iLLO 304
24VDC LINEAR



iLLO 609
24VDC LINEAR




iLLO 1000
24VDC LINEAR




iLLO 1220
24VDC LINEAR



LINEAR WALLWASHER

MODEL	iL-304	iL-609
DIMENSION (MM)		
SIZE (MM)	18X27X304	18X27X609
WATTAGE	5W/8W	10W/15W
CCT	2700K 3000K 3500K 4000K RGBW RGBW-DMX	2700K 3000K 3500K 4000K RGBW RGBW-DMX
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	240 @ 4000K / 840 @ 4000K	480 @ 4000K / 1570 @ 4000K
IP	IP67	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	-	-
ACCESSORY		
OPTICAL ACCESSORY	-	-

MODEL	iL-1000	iL-1220
DIMENSION (MM)		
SIZE (MM)	18X27X1000	18X27X1220
WATTAGE	18W/26W	20W/30W
CCT	2700K 3000K 3500K 4000K RGBW RGBW-DMX	2700K 3000K 3500K 4000K RGBW RGBW-DMX
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	780 @ 4000K / 2700 @ 4000K	870 @ 4000K / 3120 @ 4000K
IP	IP67	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI	ON/OFF PHASE 0/1-10V DALI CASAMBI
COLOR	-	-
ACCESSORY		
OPTICAL ACCESSORY	-	-



220VAC LINEAR

iNK SERIES

iNK SERIES 220-240VAC LINEAR



iK1-010



iK1-025



iK1-050



iK1-075



iK1-100

iNK SERIES
LED LINEAR SYSTEM

iNK1-010
220-240VAC LINEAR



iNK1-025
220-240VAC LINEAR




iNK1-050
220-240VAC LINEAR



iNK1-075
220-240VAC LINEAR



LINEAR GENERAL

MODEL	iK1-010	iK1-025
DIMENSION (MM)		
SIZE (MM)	85XW14XH17MM	235XW14XH17MM
WATTAGE	1.5W	3W
CCT	2700K 3000K 3500K 4000K 5000K 6500K	2700K 3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	114 @ 4000K	255 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE	ON/OFF PHASE
	-	-
	-	-
	-	-
	-	-
COLOR	-	-
	-	-
ACCESSORY	 POWER CABLE POWER CABLE WITH FUSE POWER CABLE WITH FUSE + SWITCH  CLIP + SCREW MAGNET (OPTION)	 POWER CABLE POWER CABLE WITH FUSE POWER CABLE WITH FUSE + SWITCH  CLIP + SCREW MAGNET (OPTION)
OPTICAL ACCESSORY	-	-


MODEL	iK1-050	iK1-075
DIMENSION (MM)		
SIZE (MM)	485XW14XH17MM	735XW14XH17MM
WATTAGE	6W	9W
CCT	2700K 3000K 3500K 4000K 5000K 6500K	2700K 3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	510 @ 4000K	765 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE	ON/OFF PHASE
	-	-
	-	-
	-	-
	-	-
COLOR	-	-
	-	-
ACCESSORY	 POWER CABLE POWER CABLE WITH FUSE POWER CABLE WITH FUSE + SWITCH  CLIP + SCREW MAGNET (OPTION)	 POWER CABLE POWER CABLE WITH FUSE POWER CABLE WITH FUSE + SWITCH  CLIP + SCREW MAGNET (OPTION)
OPTICAL ACCESSORY	-	-

iNK SERIES
LED LINEAR SYSTEM

iNK1-100
220-240VAC LINEAR




LINEAR GENERAL

MODEL	iK1-100
DIMENSION (MM)	
SIZE (MM)	985XW14XH17MM
WATTAGE	12W
CCT	2700K 3000K 3500K 4000K 5000K 6500K
BEAM ANGLE	 120°
CRI	>90
LUMEN OUTPUT	1020 @ 4000K
IP	IP20
DIMMING	ON/OFF PHASE - - - -
COLOR	- -
ACCESSORY	 POWER CABLE POWER CABLE WITH FUSE POWER CABLE WITH FUSE + SWITCH CLIP + SCREW MAGNET (OPTION)
OPTICAL ACCESSORY	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING

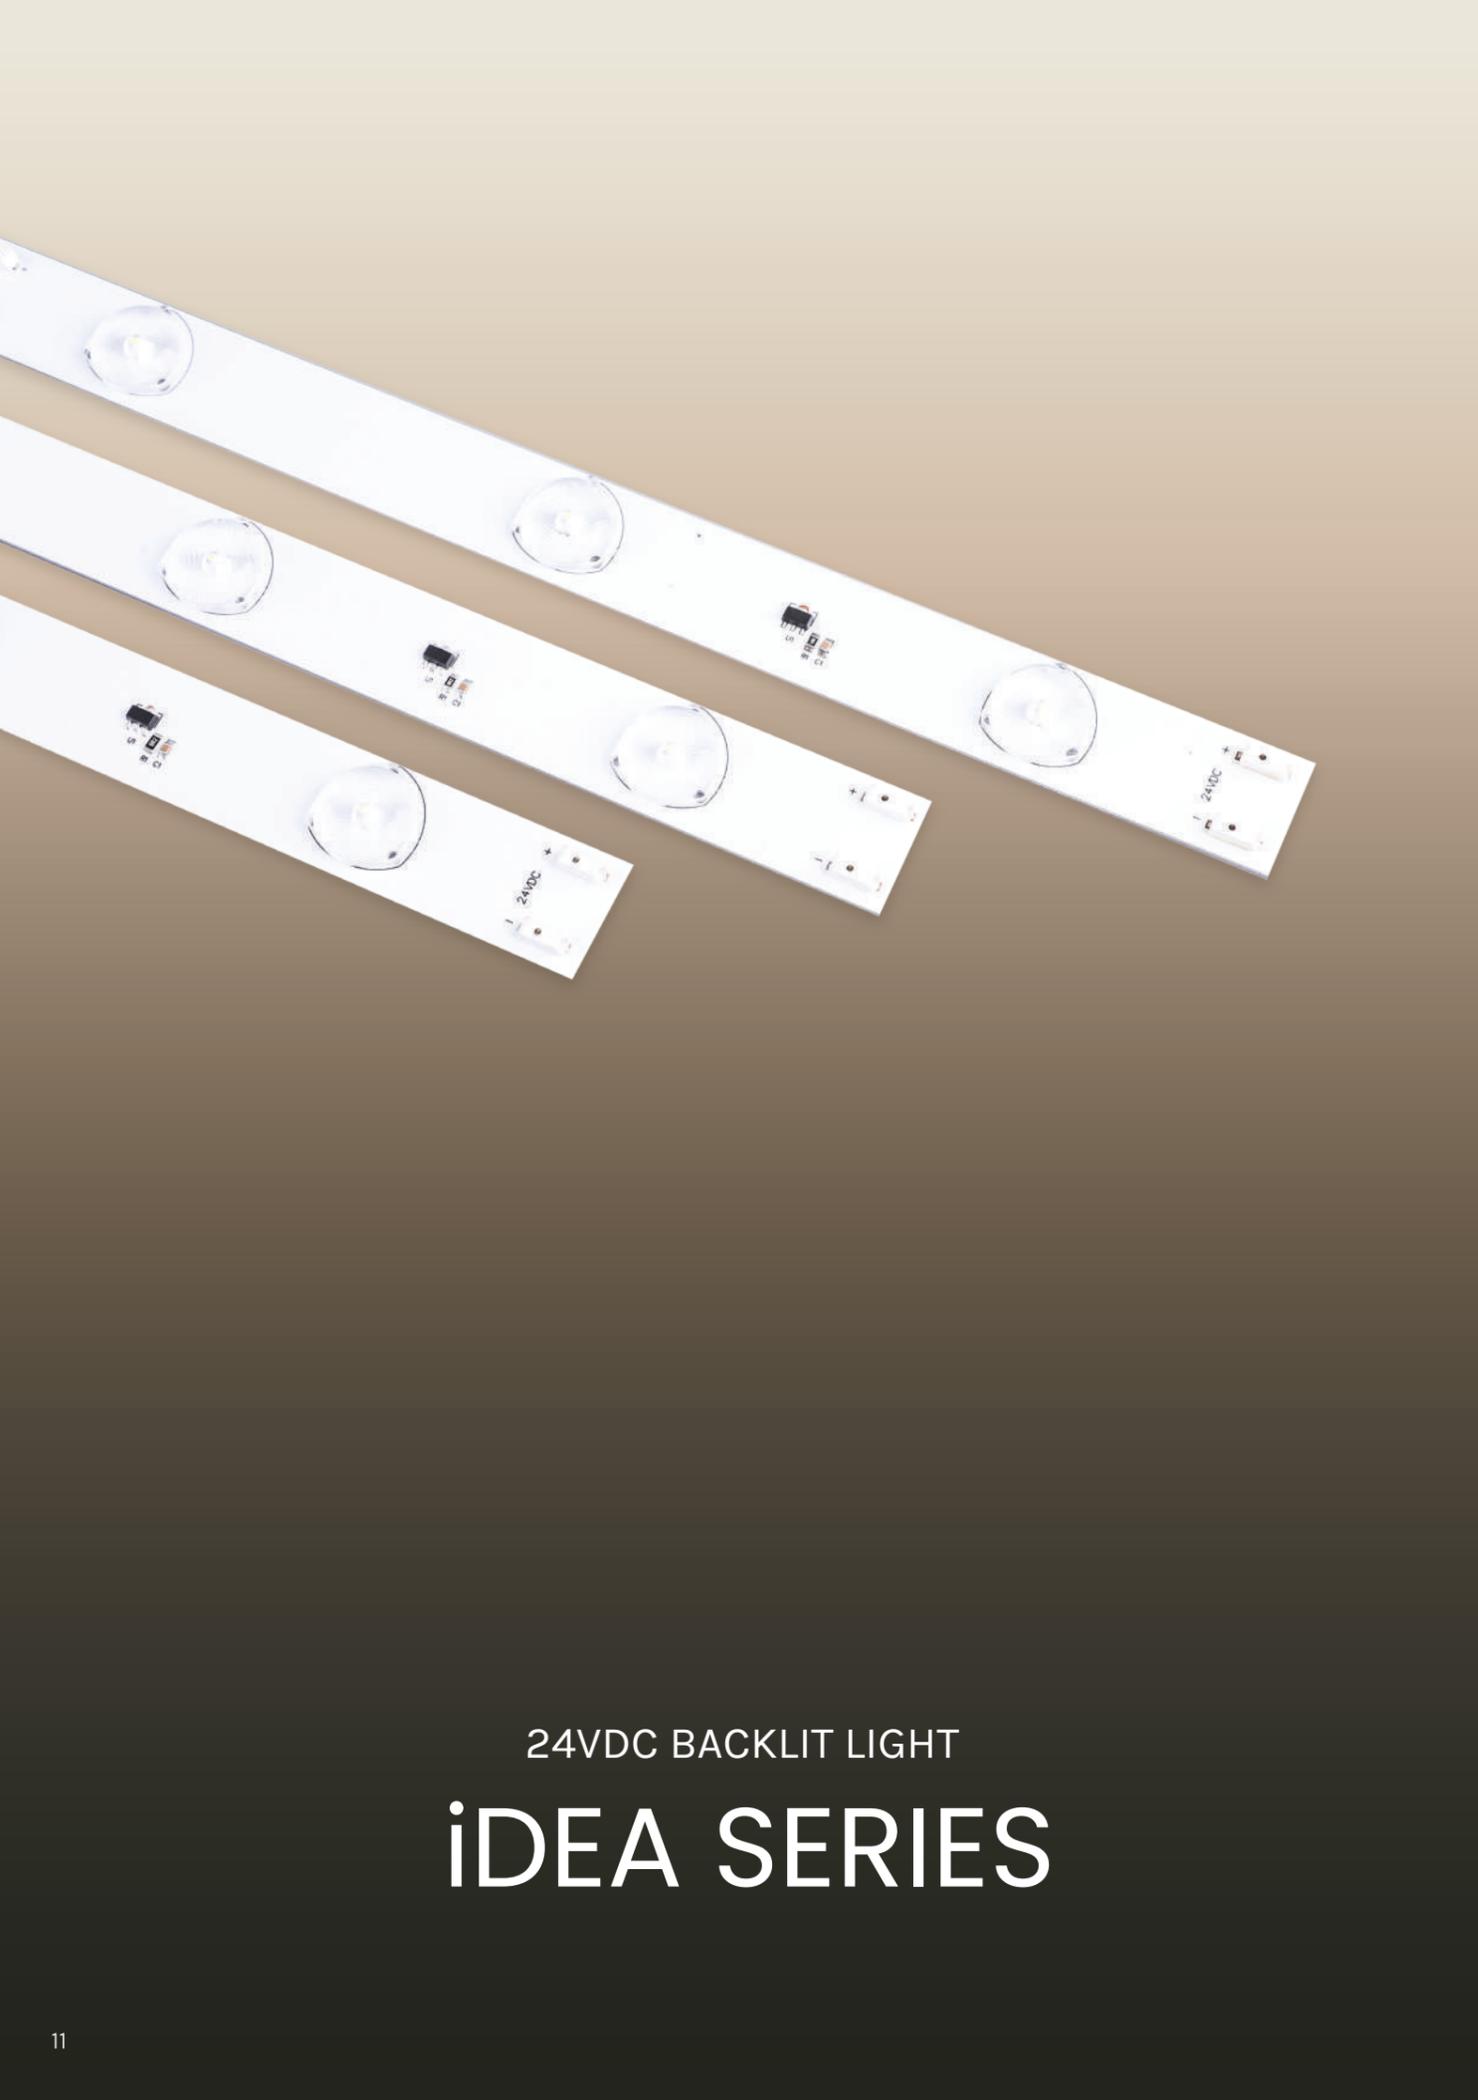

24VDC BACKLIT LIGHT

iDEA SERIES

iDEA2 SERIES

24VDC BACKLIT LIGHT



iD2 240



iD2 480



iD2 960



iD2Z 240



iD2Z 480



iD2Z 960

iDEA2 SERIES

24VDC BACKLIT LIGHT



iDE 219



iDE 365



iDE 438



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : ARIS LIGHTING

iDEA2 SERIES
LED LINEAR SYSTEM

iDEA2 240
24VDC BACKLIT LIGHT



iDEA2 480
24VDC BACKLIT LIGHT




iDEA2 960
24VDC BACKLIT LIGHT



BACKLIT LIGHT

MODEL	iD2-240	iD2-480
DIMENSION (MM)		
SIZE (MM)	20X7X240	20X7X480
WATTAGE	2W(RGB)/ 3.6W (WHITE)/ 6.7W (CCT)	3W(RGB)/ 7.2W (WHITE)/ 13.5W (CCT)
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
	CCT	CCT
	RGB	RGB
BEAM ANGLE	 180°	 180°
CRI	>90	>90
LUMEN OUTPUT	68 @ 4000K/360 @ 4000K/670 @ 4000K	104 @ 4000K/720 @ 4000K/1350 @ 4000K
IP	IP20 / IP65	IP20 / IP65
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	- -	- -
ACCESSORY	 ID2-CFF08 ID2-CFF22 ID2-CFB100 D2-CFB300	 ID2-CFF08 ID2-CFF22 ID2-CFB100 D2-CFB300
OPTICAL ACCESSORY	-	-

MODEL	iD2-960
DIMENSION (MM)	
SIZE (MM)	20X7X960
WATTAGE	6W (RGB)/ 14.4W (WHITE)/ 27W (CCT)
CCT	2700K 3000K 3500K 4000K
	CCT
	RGB
BEAM ANGLE	 180°
CRI	>90
LUMEN OUTPUT	205 @ 4000K/1440 @ 3000K/2700 @ 4000K
IP	IP20 / IP65
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	- -
ACCESSORY	 ID2-CFF08 ID2-CFF22 ID2-CFB100 D2-CFB300
OPTICAL ACCESSORY	-

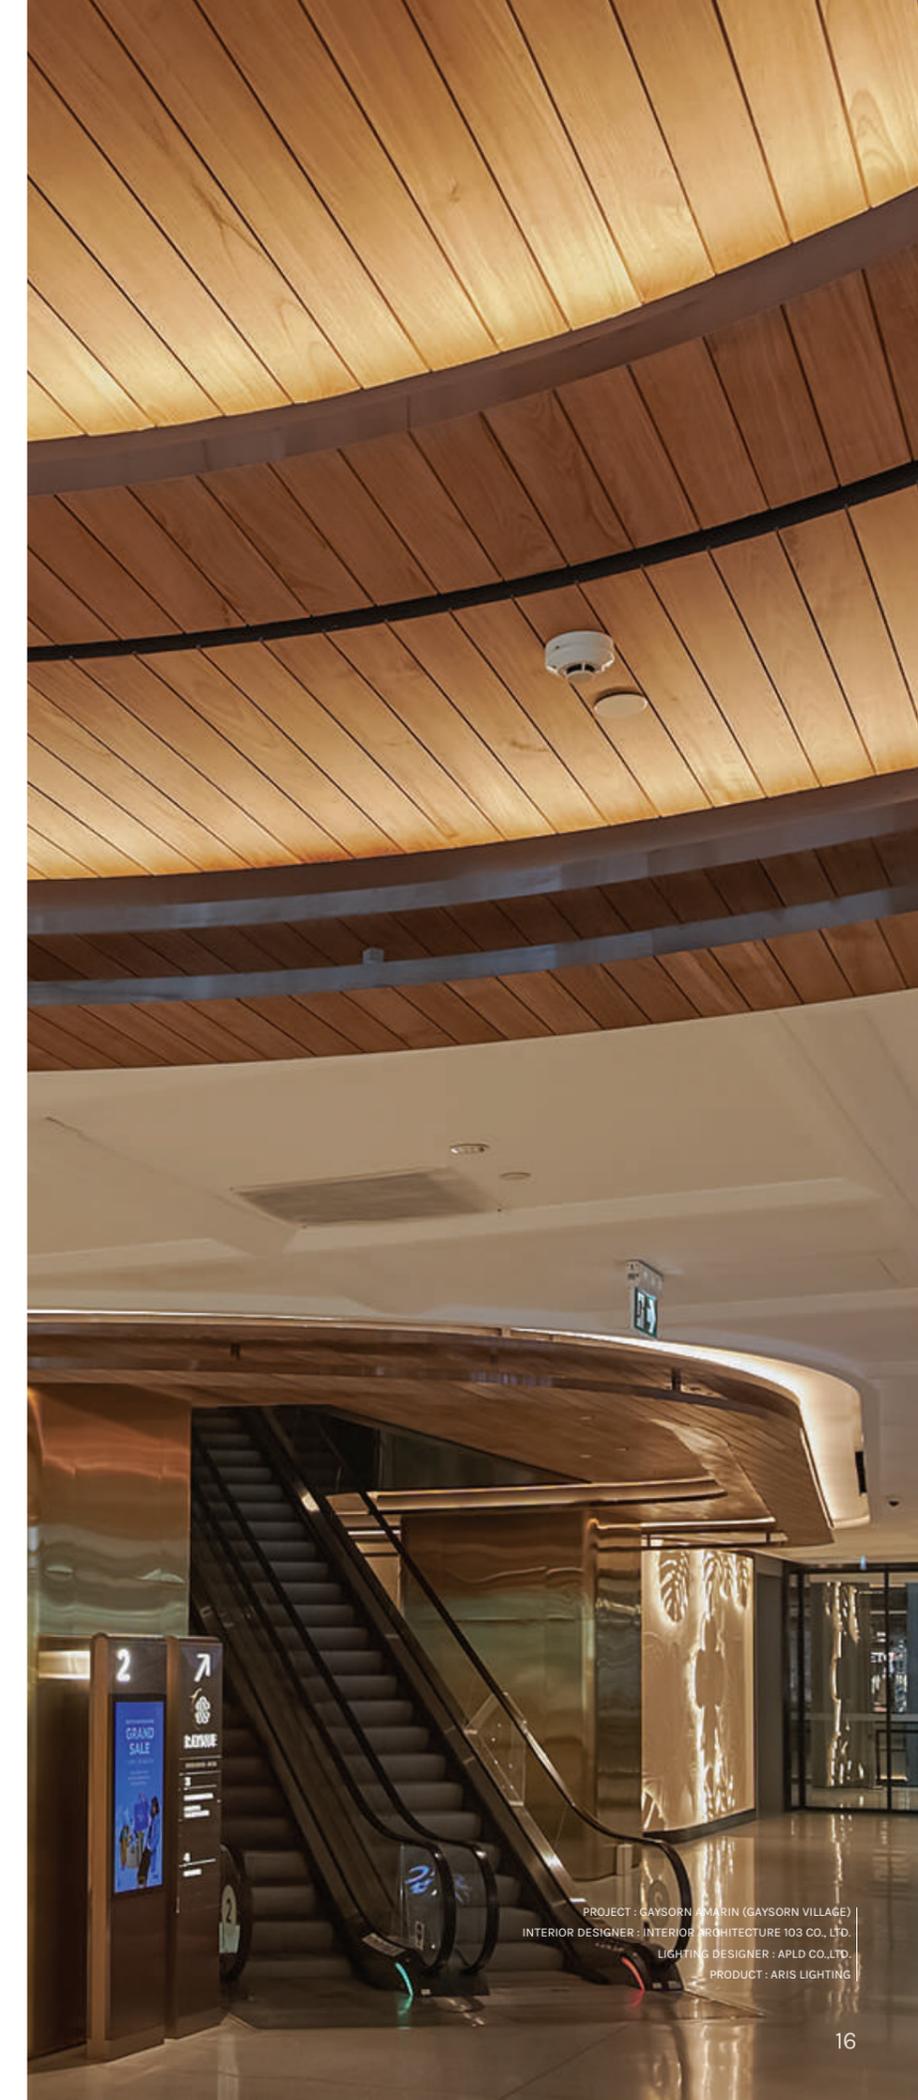

PROJECT : GAYSORN MARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : ARIS LIGHTING

iDEA2 SERIES
LED LINEAR SYSTEM

iDEA 219
24VDC BACKLIT LIGHT




iDEA 365
24VDC BACKLIT LIGHT




iDEA 438
24VDC BACKLIT LIGHT




BACKLIT LIGHT

MODEL	iDE-219	iDE-365
DIMENSION (MM)		
SIZE (MM)	25X14X219	25X14X265
WATTAGE	7.2W	11.4W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
BEAM ANGLE	 20°x45°	 20°x45°
CRI	>90	>90
LUMEN OUTPUT	720 @ 4000K	1140 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iDE-438
DIMENSION (MM)	
SIZE (MM)	25X14X438
WATTAGE	14.4W
CCT	2700K 3000K 3500K 4000K
BEAM ANGLE	 20°x45°
CRI	>90
LUMEN OUTPUT	1440 @ 4000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-
ACCESSORY	-
OPTICAL ACCESSORY	-



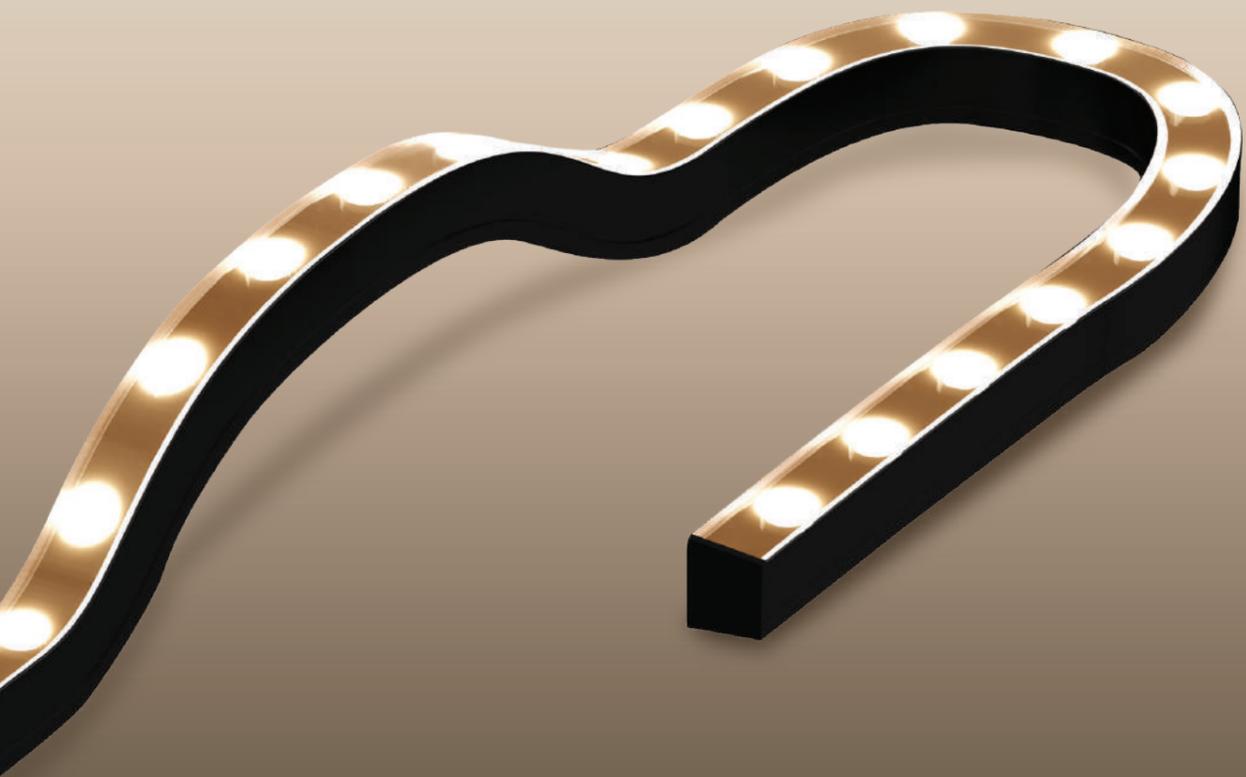

24VDC FLEXIBLE WALLWASHER

iBIS SERIES

iBIS SERIES 24VDC FLEXIBLE WALLWASHER



iB 2015



iB 2323



iB 3023



iB 3425



iBIS 3425AG

iBIS SERIES
LED LINEAR SYSTEM

iBIS 2015
24VDC WALL WASHER

iBIS 2323
24VDC WALL WASHER

iBIS 3023
24VDC WALL WASHER

iBIS 3425
24VDC WALL WASHER



FLEXIBLE WALLWASHER

MODEL	iB-2015	iB-2323
DIMENSION (MM)		
SIZE (MM)	20X15X5000	23X23X5000
WATTAGE	18W	17W/18W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K DMX-WHITE DMX-CCT
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	2160 @ 4000K	1800 @ 3000K
IP	IP67	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY		
OPTICAL ACCESSORY	-	-


MODEL	iB-3023	iB-3425
DIMENSION (MM)		
SIZE (MM)	30X23X5000	34X25X5000
WATTAGE	25W	25W
CCT	2700K 3000K 3500K 4000K RGBW DMX-RGBW	2700K 3000K 3500K 4000K RGBW DMX-RGBW
BEAM ANGLE		
CRI	>90	>90
LUMEN OUTPUT	2625 @ 3000K	2500 @ 4000K
IP	IP67	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY		
OPTICAL ACCESSORY	-	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING

iBIS SERIES
LED LINEAR SYSTEM

iBIS 3425AG
24VDC WALL WASHER



FLEXIBLE WALLWASHER

MODEL **iB-3425AG**

DIMENSION (MM) 5000mm
34mm
25mm

SIZE (MM) **34X25X5000**

WATTAGE **25W**

CCT **2700K**
3000K
3500K
4000K
RGBW

BEAM ANGLE 10° 15° 20° 25° 30° 40° 50° 25°x50°

CRI **>90**

LUMEN OUTPUT **1910 @ 4000K**

IP **IP67**

DIMMING **ON/OFF**
PHASE
0/1-10V
DALI
CASAMBI
DMX


COLOR **-**
-

ACCESSORY BRACKET ALIUMINUM PROFILE ROTATABLE BRACKET 45°-90°

OPTICAL ACCESSORY **-**



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING

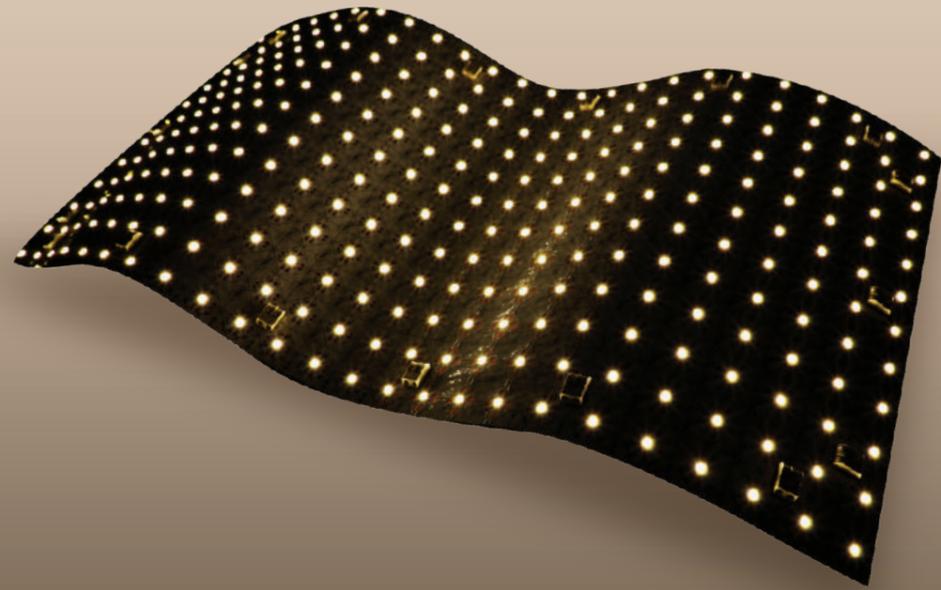

24VDC BACKLIT SHEET
iMO SERIES

iMO SERIES
24VDC BACKLIT SHEET



iM 2020



iM 2424



iM 6040



iM 6060



iM 7676



iM 12040



iM 16080



iM 101101

iMO SERIES
LED LINEAR SYSTEM

iMO 2020
24VDC BACKLIT SHEET



iMO 2424
24VDC BACKLIT SHEET





iMO 6040
24VDC BACKLIT SHEET






iMO 6060
24VDC BACKLIT SHEET



BACKLIT SHEET

MODEL	iM-2020	iM-2424
DIMENSION (MM)		
SIZE (MM)	1X480X240	1X480X240
WATTAGE	10W/20W/30W/45W	20W /40W/60W/90W
CCT	2700K 3000K 3500K 4000K - -	CCT - - - - -
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	1190 @ 4000K 10W / 2230 @ 4000K 20W 3450 @ 4000K 30W / 4300 @ 4000K 45W	1980 @ 4000K 20W / 3830 @ 4000K 40W 5610 @ 4000K 60W / 8040 @ 4000K 90W
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	- -	- -
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iM-6040	iM-6060
DIMENSION (MM)		
SIZE (MM)	1X480X240	6.8X480X240
WATTAGE	45W/ 90W(CCT)	20W
CCT	2700K 3000K 3500K 4000K CCT	2700K 3000K 3500K 4000K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	4300@ 4000K (45W)/ 7275@ 4000K (90W)	1780 @ 3000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	- -	- -
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

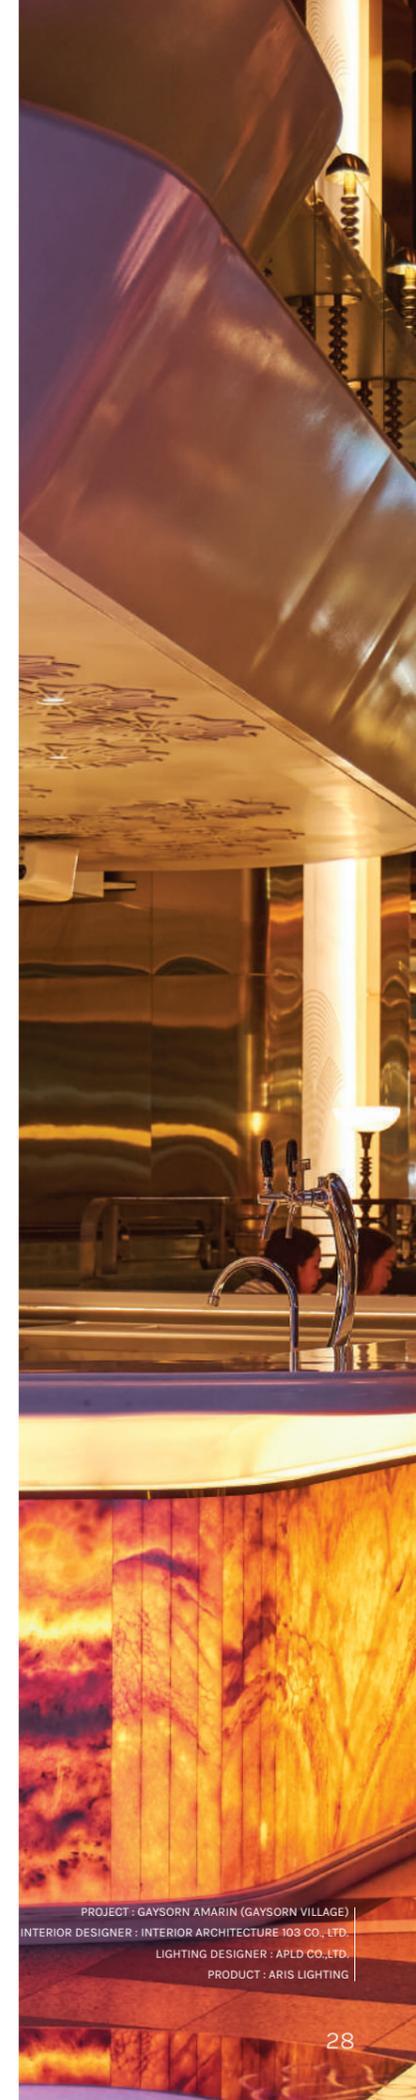

PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING

iMO SERIES
LED LINEAR SYSTEM

iMO 7676
24VDC BACKLIT SHEET



iMO 12040
24VDC BACKLIT SHEET





iMO 16080
24VDC BACKLIT SHEET





iMO 101101
24VDC BACKLIT SHEET



BACKLIT SHEET

MODEL	iM-16080	iM-12040
DIMENSION (MM)		
SIZE (MM)	1X610X305	2X480X240
WATTAGE	20W	60W(RGB)/ 80W(RGBW)
CCT	2700K 3000K 3500K 4000K - -	RGB RGBW - - - -
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	2000@ 3000K	2550 @ 4000K 60W(RGB) 3980 @ 4000K 80W(RGBW)
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iM-16080	iM-101101
DIMENSION (MM)		
SIZE (MM)	1X480X240	2X610X305
WATTAGE	20W/40W/ 60W(CCT) / 90W (CCT)	35W
CCT	2700K 3000K 3500K 4000K - -	DMX RGBW - - - -
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	2420@ 4000K (20W)/ 3450@ 4000K (40W) 6290@ 4000K (60W)/ 9160@ 4000K (90W)	800@ 4000K
IP	IP20 / IP54	IP20 / IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-





24VDC MINI WALLWASHER
iSIS SERIES

iSIS SERIES
24VDC MINI WALLWASHER



iS2010



iS2313

iSIS SERIES
LED LINEAR SYSTEM




iSIS 2010
24VDC MINI WALLWASHER



iSIS 2313
24VDC MINI WALLWASHER



FLEXIBLE WALLWASHER

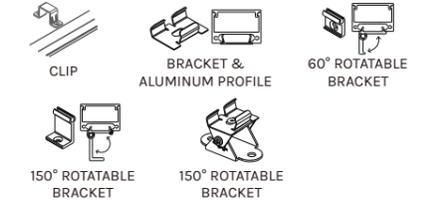MODEL	iS-2010	iS-2313
DIMENSION (MM)		
SIZE (MM)	20X10.8X5000	23X13.5X5000
WATTAGE	9.6W	18W
CCT	3000K 4000K 6500K RGBW	2700K 3000K 3500K 4000K RGBW
BEAM ANGLE	 45°	
CRI	>90	>90
LUMEN OUTPUT	990 @ 3000K	2160 @ 3000K
IP	IP20 / IP67	IP20 / IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	
OPTICAL ACCESSORY	-	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING



NEON FLEX
iN SERIES

iN SERIES
NEON FLEX



iNS0306
SIDE BEND



iNS0409
SIDE BEND



iNS0510
SIDE BEND



iNS0612
SIDE BEND



iNS1020
SIDE BEND



iNS1220AQ
SIDE BEND



iNS1313AQ
SIDE BEND



iNS1616AQ
SIDE BEND

iN SERIES
NEON FLEX



iNT0810
TOP BEND



iNT1616
TOP BEND



iNT1313AQ
TOP BEND



iNT1616AQ
TOP BEND

iN SERIES
NEON FLEX



iNST1616
DUAL BEND



iNST2020
DUAL BEND



iNST2323
DUAL BEND



iNST1616AGH
DUAL BEND



iNST1616AGS
DUAL BEND

iN SERIES

NEON FLEX



iNH1818
360°



iNH2525
360°



iN SERIES
LED LINEAR SYSTEM

iNS0306
SIDE BEND



iNS0409
SIDE BEND



SIDE BEND NEON FLEX

MODEL	iNS0306	iNS0409
DIMENSION (MM)		
SIZE (MM)	3X6X5000	4X8.5X5000
WATTAGE	9W	9W
CCT	2700K 3000K 4000K 6500K	2700K 3000K 4000K 6500K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	270 @ 4000K	200 @ 4000K
IP	IP54	IP54
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-


iNS0510
SIDE BEND



iNS0612
SIDE BEND



MODEL	iNS0510	iNS0612
DIMENSION (MM)		
SIZE (MM)	6X10X5000	6X12X5000
WATTAGE	9W	9W
CCT	2700K 3000K 4000K 6500K	2700K 3000K 4000K 6500K
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	190 @ 4000K	260 @ 4000K
IP	IP54	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	
OPTICAL ACCESSORY	-	-

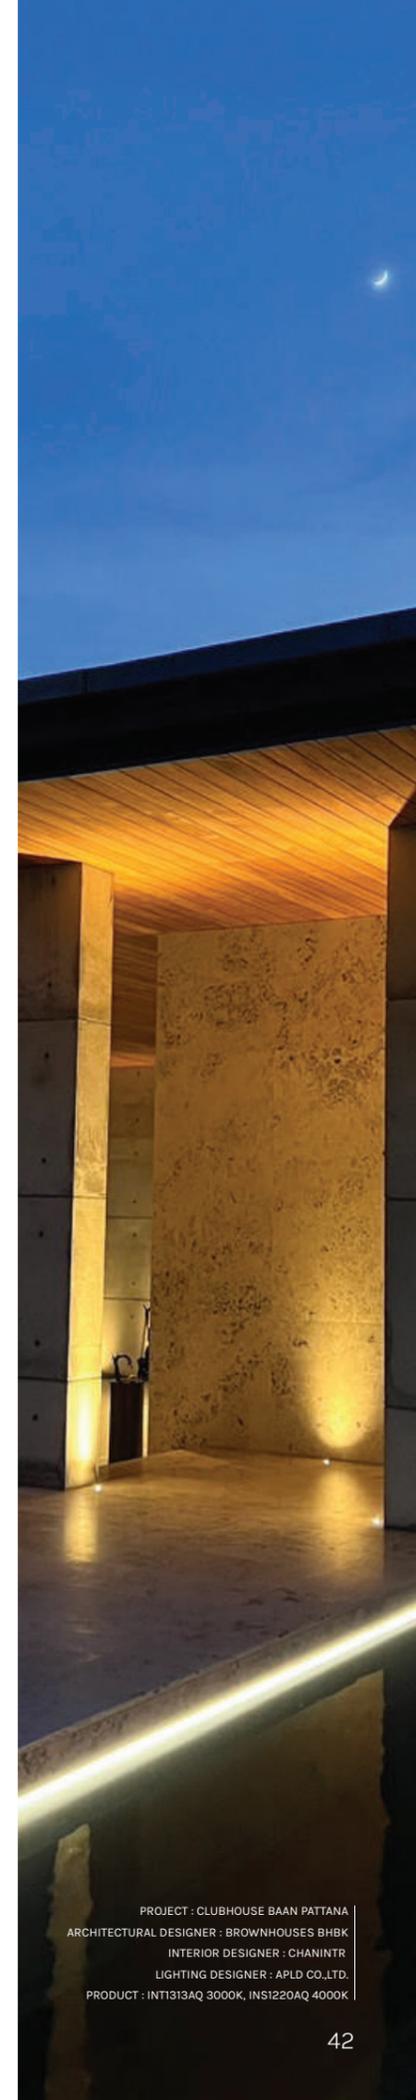

PROJECT : CLUBHOUSE BAAN PATTANA
ARCHITECTURAL DESIGNER : BROWNHOUSES BHBK
INTERIOR DESIGNER : CHANINTR
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : INT1313AQ 3000K, INS1220AQ 4000K

iN SERIES
LED LINEAR SYSTEM

iNS1020
SIDE BEND



iNS1220AQ
SIDE BEND





iNS1313AQ
SIDE BEND








iNS1616AQ
SIDE BEND



SIDE BEND NEON FLEX

MODEL	iNS1020	iNS1220AQ
DIMENSION (MM)		
SIZE (MM)	10X20X5000	11.5X20X5000
WATTAGE	14W/18W	14W
CCT	2700K 3000K 4000K 6500K RGB RGBW DMX	2700K 3000K 4000K 6500K RGB RGBW DMX
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	820 @ 4000K	560 @ 4000K
IP	IP54	IP68
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	 FIXED BY CLIP  FIXED BY BRACKET  FIXED BY ALUMINUM/PC PROFILE  FIXED BY BENDABLE BRACKET	 FIXED BY CLIP  FIXED BY BRACKET  FIXED BY ALUMINUM/PC PROFILE  FIXED BY BENDABLE BRACKET
OPTICAL ACCESSORY	-	-

MODEL	iNS1313AQ	iNS1616AQ
DIMENSION (MM)		
SIZE (MM)	13X13X5000	16X16X5000
WATTAGE	12W	14W
CCT	2700K 3000K 4000K 6500K RGB	2700K 3000K 4000K 6500K RGB
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	480 @ 4000K	776 @ 4000K
IP	IP68	IP68
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	 FIXED BY CLIP  FIXED BY BRACKET  FIXED BY ALUMINUM/PC PROFILE  FIXED BY BENDABLE BRACKET	 FIXED BY CLIP  FIXED BY BRACKET  FIXED BY ALUMINUM/PC PROFILE  FIXED BY BENDABLE BRACKET
OPTICAL ACCESSORY	-	-

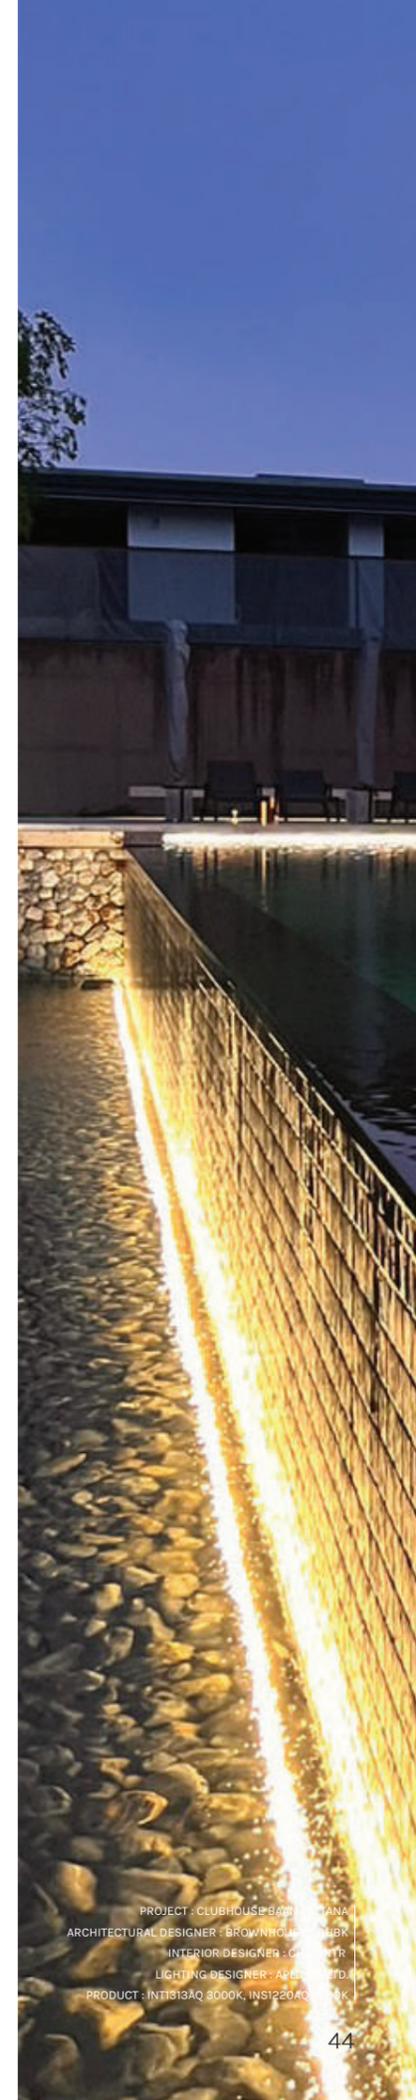

PROJECT : CLUBHOUSE BARRACUDA
 ARCHITECTURAL DESIGNER : BROWNHOUSES
 INTERIOR DESIGNER : CANTIERO
 LIGHTING DESIGNER : APPLIED LIGHTING
 PRODUCT : INT1313AQ 3000K, INT1220AQ 3000K



iN SERIES
LED LINEAR SYSTEM

iNT0810
TOP BEND



iNT1616
TOP BEND





MODEL	iNT0810	iNT1616
DIMENSION (MM)		
SIZE (MM)	6X6X5000	10X10X5000
WATTAGE	9W	14W
CCT	2700K 3000K 4000K 6500K	2700K 3000K 4000K 6500K RGB RGBW DMX
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	540 @ 4000K	850 @ 4000K
IP	IP67	IP67 / IP68
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

iNT1313AQ
TOP BEND



iNT1616AQ
TOP BEND



MODEL	iNT1313AQ	iNT1616AQ
DIMENSION (MM)		
SIZE (MM)	13X13X5000	16X16X5000
WATTAGE	14W	14W
CCT	2700K 3000K 4000K 6500K RGB RGBW	2700K 3000K 4000K 6500K RGB RGBW
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	935 @ 4000K	700 @ 4000K
IP	IP68	IP68
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	 FIXED BY CLIP  FIXED BY BRACKET  FIXED BY ALUMINUM/PC PROFILE  FIXED BY BENDABLE BRACKET	 FIXED BY CLIP  FIXED BY BRACKET  FIXED BY ALUMINUM/PC PROFILE  FIXED BY BENDABLE BRACKET
OPTICAL ACCESSORY	-	-



iN SERIES
LED LINEAR SYSTEM

iNST1616
DUAL BEND



iNST2020
DUAL BEND






iNST2323
DUAL BEND



iNST1616AGH
DUAL BEND



MODEL	iNST1616	iNST2020
DIMENSION (MM)		
SIZE (MM)	16X16X5000	20X20X5000
WATTAGE	14W	14W
CCT	2700K 3000K 4000K 6500K 2700-6000K (TUNABLE) RGB	2700K 3000K 4000K 6500K 2700-6000K (TUNABLE) RGB RGBW DMX RGBW PIXELS
BEAM ANGLE	 120°	 120°
CRI	>90	>90
LUMEN OUTPUT	710 @ 4000K	820 @ 4000K
IP	IP67	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iNST2323	iNST1616AGH
DIMENSION (MM)		
SIZE (MM)	23X23X5000	16X16X5000
WATTAGE	14W	14W
CCT	2700K 3000K 4000K 6500K 2700-6000K (TUNABLE) RGB RGBW DMX RGBW PIXELS	2700K 3000K 4000K 6500K 2700-6000K (TUNABLE) RGB RGBW DMX RGBW PIXELS
BEAM ANGLE	 120°	 50°
CRI	>90	>90
LUMEN OUTPUT	771 @ 4000K	140 @ 4000K
IP	IP68	IP54 / IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



iN SERIES
LED LINEAR SYSTEM

iNST1616AGS
DUAL BEND






iNH1818
360°




iNH2525
360°



MODEL	iNST1616AGS	iNH1818
DIMENSION (MM)		
SIZE (MM)	16X16X5000	18X5000
WATTAGE	14W	12W
CCT	2700K 3000K 4000K 6500K 2700-6000K (TUNABLE) RGB	2700K 3000K 4000K 6500K
BEAM ANGLE	 45°	 360°
CRI	>90	>90
LUMEN OUTPUT	450 @ 4000K	860 @ 4000K
IP	IP54 / IP67	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY		
OPTICAL ACCESSORY	-	-

MODEL	iNH2525
DIMENSION (MM)	
SIZE (MM)	25X5000
WATTAGE	18W
CCT	2700K 3000K 4000K 6500K RGB
BEAM ANGLE	 360°
CRI	>90
LUMEN OUTPUT	1620 @ 4000K
IP	IP67
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-
ACCESSORY	
OPTICAL ACCESSORY	-

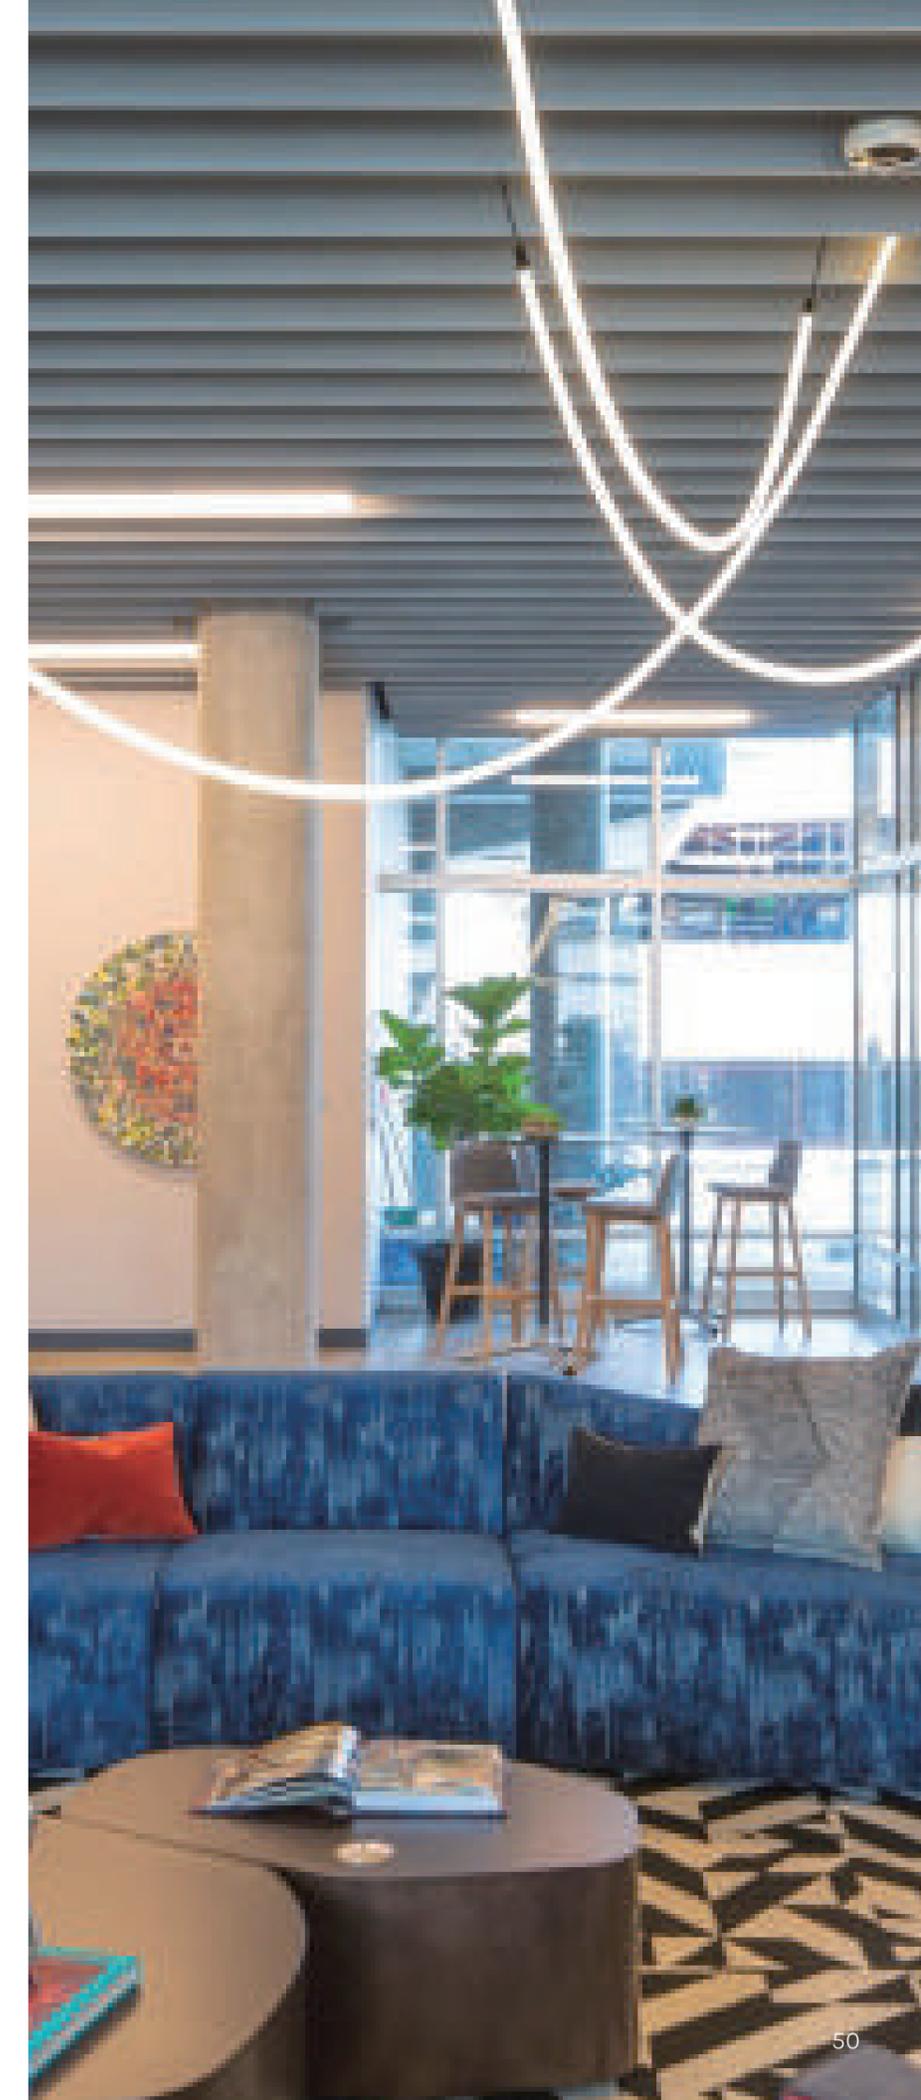



24VDC STRIPLIGHT
iA SERIES

iA SERIES
 24VDC STRIPLIGHT



iAM8-036-168B
 single color



iAM8-072-168B
 single color



iAM8-105-168B
 single color



iA8-144-160B
 single color



iA4-072-238C
 Single Color Slim



iA5-087-140D
 Single Color Slim



iA5-131-210D
 Single Color Slim

iA SERIES

24VDC STRIPLIGHT



iAM10-2C-048-280C
2-Color



iAM10-2C-096-280C
2-Color



iAM10-2C-135-280C
2-Color



iA10-2C-180-224B
2-Color



iA5-2C-120-168B
2-Color Slim



iA10-4C-180-160F
4-Color



iA12-5C-180-288GC
5-Color

iA SERIES

24VDC STRIPLIGHT



iA10-2CPM-115-120B
DMX



iA10-PM-144-120B
DMX



iA12-4CPM-200-060G
DMX

iA SERIES

24VDC STRIPLIGHT



iA6CS-072-060B
Curve



iA8CU-072-060B
Curve



iA12CU-3C-120-060G
Curve



iA12CU-4C-126-060G
Curve

iA SERIES

24VDC STRIPLIGHT



iA16L180-2C-144-020B
Lens

iA16LCS180-096-020B
Lens

iA SERIES
LED LINEAR SYSTEM

iAM8-036-168B
SINGLE COLOR



iAM8-072-168B
SINGLE COLOR



iAM8-105-168B
SINGLE COLOR



iA8-144-160B
SINGLE COLOR



24VDC STRIPLIGHT

MODEL	iAM8-036-168B	iAM8-072-168B
DIMENSION (MM)		
SIZE (MM)	1.5X8X5000	1.5X8X5000
WATTAGE	3.6W	7.2W
CCT	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB
BEAM ANGLE	120°	120°
CRI	>95	>95
LUMEN OUTPUT	570 @ ALL	1130 @ ALL
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iAM8-105-168B	iA8-144-160B
DIMENSION (MM)		
SIZE (MM)	1.5X8X5000	2X8X5000
WATTAGE	10.5W	13.09W
CCT	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB
COLOR	-	RED GREEN BLUE AMBER
BEAM ANGLE	120°	120°
CRI	>95	>95
LUMEN OUTPUT	1600 @ ALL	2100 @ 4000K
IP	IP20	IP20 / IP65
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

iA SERIES
LED LINEAR SYSTEM

iA4-072-238C
Single Color Slim





iA5-087-140D
Single Color Slim




iA5-131-210D
Single Color Slim



24VDC STRIPLIGHT

MODEL	iA4-072-238C	iA5-087-140D
DIMENSION (MM)		
SIZE (MM)	1X4X5000	3X5X5000
WATTAGE	7.2W	8.7W
CCT	11800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB
BEAM ANGLE	 120°	 120°
CRI	>95	>95
LUMEN OUTPUT	830 @4000K	1000 @4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iA5-131-210D
DIMENSION (MM)	
SIZE (MM)	3X5X5000
WATTAGE	13.09W
CCT	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB
BEAM ANGLE	 120°
CRI	>95
LUMEN OUTPUT	1500 @4000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-
ACCESSORY	-
OPTICAL ACCESSORY	-



PROJECT : LIANA RESTAURANT 2 FL THE CORNER HOUSE BANGKOK
INTERIOR DESIGNER : MAAT
LIGHTING DESIGNER : @LIGHTIS.STUDIO
PRODUCT : IA SERIES , IN SERIES , ROME SERIES , CASAMBI

iA SERIES
LED LINEAR SYSTEM

iAM10-2C-048-280C
2-Color



iAM10-2C-096-280C
2-Color



iAM10-2C-135-280C
2-Color



iA10-2C-180-224B
2-Color



24VDC STRIPLIGHT

MODEL	iAM10-2C-048-280C	iAM10-2C-096-280C
DIMENSION (MM)		
SIZE (MM)	1.2X10X5000	1.2X10X5000
WATTAGE	4.8W	9.6W
CCT	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB 2700-6500K (TUNABLE)	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB 2700-6500K (TUNABLE)

MODEL	iAM10-2C-135-280C	iA10-2C-180-224B
DIMENSION (MM)		
SIZE (MM)	1.2X10X5000	2X10X5000
WATTAGE	13.5W	18W
CCT	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB 2700-6500K (TUNABLE)	2700-6500K95BB 2300-6500K95BB 1800-4000K90BB 1800-6500K90BB 1600-6500K90BB 2300K-2600K (TUNABLE) 5700K-6500K (TUNABLE)

BEAM ANGLE		
CRI	>95	>95
LUMEN OUTPUT	570 @ ALL	1080 @ ALL
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

BEAM ANGLE		
CRI	>95	>95
LUMEN OUTPUT	1490 @ ALL	950 @ 2300K-2600K / 1020 @ 5700K-6500K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-



PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING

iA SERIES
LED LINEAR SYSTEM

iA5-2C-120-168B
2-Color Slim



iA10-4C-180-160F
4-Color




iA12-5C-180-288GC
5-Color



24VDC STRIPLIGHT

MODEL	iA5-2C-120-168B	iA10-4C-180-160F
DIMENSION (MM)		
SIZE (MM)	1X5X3000	2X10X5000
WATTAGE	12W	18W
CCT	2700-6500K95BB 2300-6500K95BB 1800-4000K90BB 1800-6500K90BB 1600-6500K90BB	RGB+1800K90BB RGB+2300K90BB RGB+2700K95BB RGB+3000K95BB RGB+4000K95BB RGB+6500K95BB
BEAM ANGLE	120°	120°
CRI	>95	>95
LUMEN OUTPUT	1100 @ 4500K	1332 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iA12-5C-180-288GC
DIMENSION (MM)	
SIZE (MM)	1.8X12X5000
WATTAGE	18W
CCT	RGB+2300-6500K95BB RGB+2700-6500K95BB RGB+1800-4000K90BB RGB+1800-6500K90BB RGB+1600-6500K90BB
BEAM ANGLE	120°
CRI	>95
LUMEN OUTPUT	1240 @ 4500K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-
ACCESSORY	-
OPTICAL ACCESSORY	-

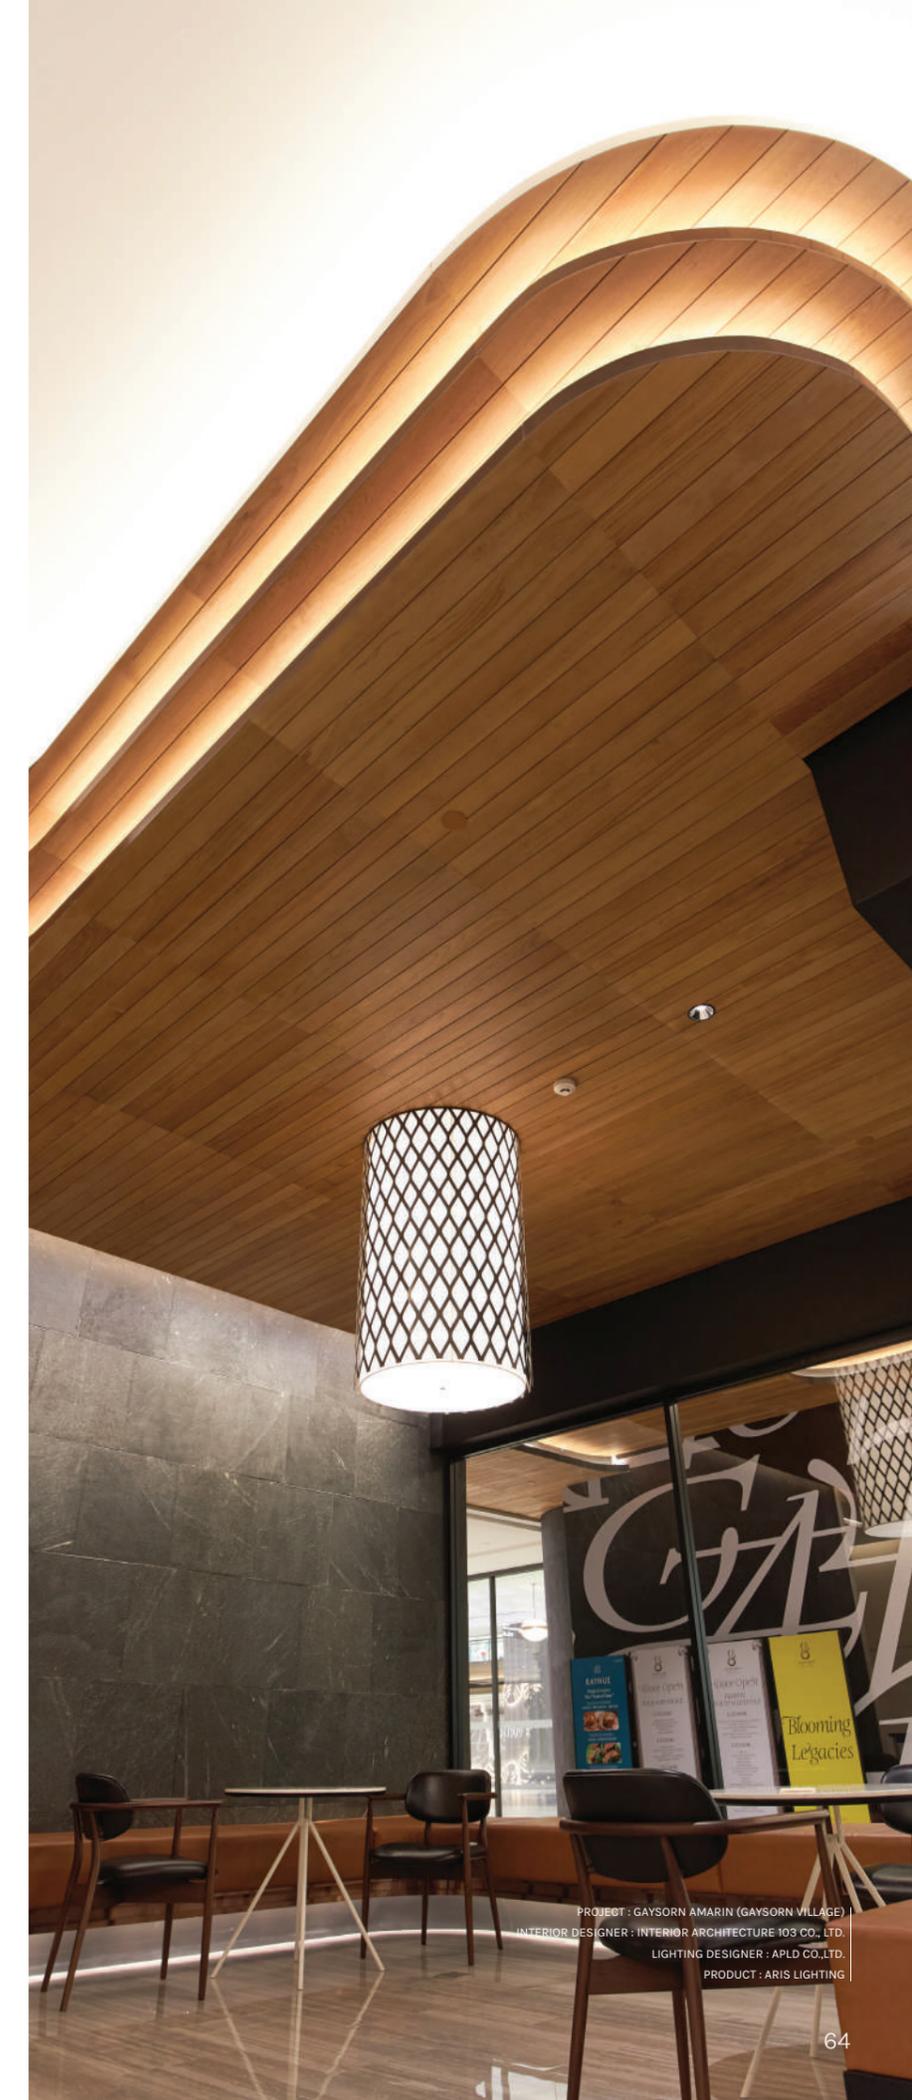

PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING

iA SERIES
LED LINEAR SYSTEM

iA10-2CPM-115-120B
DMX



iA10-PM-144-120B
DMX




iA12-4CPM-200-060G
DMX



24VDC STRIPLIGHT

MODEL	iA10-2CPM-115-120B	iA10-PM-144-120B
DIMENSION (MM)		
SIZE (MM)	2X10X10000	2X10X5000
WATTAGE	11.5W	14.4W
CCT	2700-6500K90BB 1800-4000K90BB DMX	1800K90BB 2300K90BB 2700K95BB 3000K95BB 3500K95BB 4000K95BB 5000K95BB CCT DMX
BEAM ANGLE	 120°	 120°
CRI	>95	>95
LUMEN OUTPUT	720 @ 4000K	920 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

MODEL	iA12-4CPM-200-060G
DIMENSION (MM)	
SIZE (MM)	2X12X5000
WATTAGE	20W
CCT	RGB+1800K90BB RGB+2300K90BB RGB+2700K90BB RGB+3000K90BB RGB+4000K90BB RGB+6500K90BB RGBW DMX
BEAM ANGLE	 120°
CRI	>95
LUMEN OUTPUT	710 @ 4000K
IP	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-
ACCESSORY	-
OPTICAL ACCESSORY	-

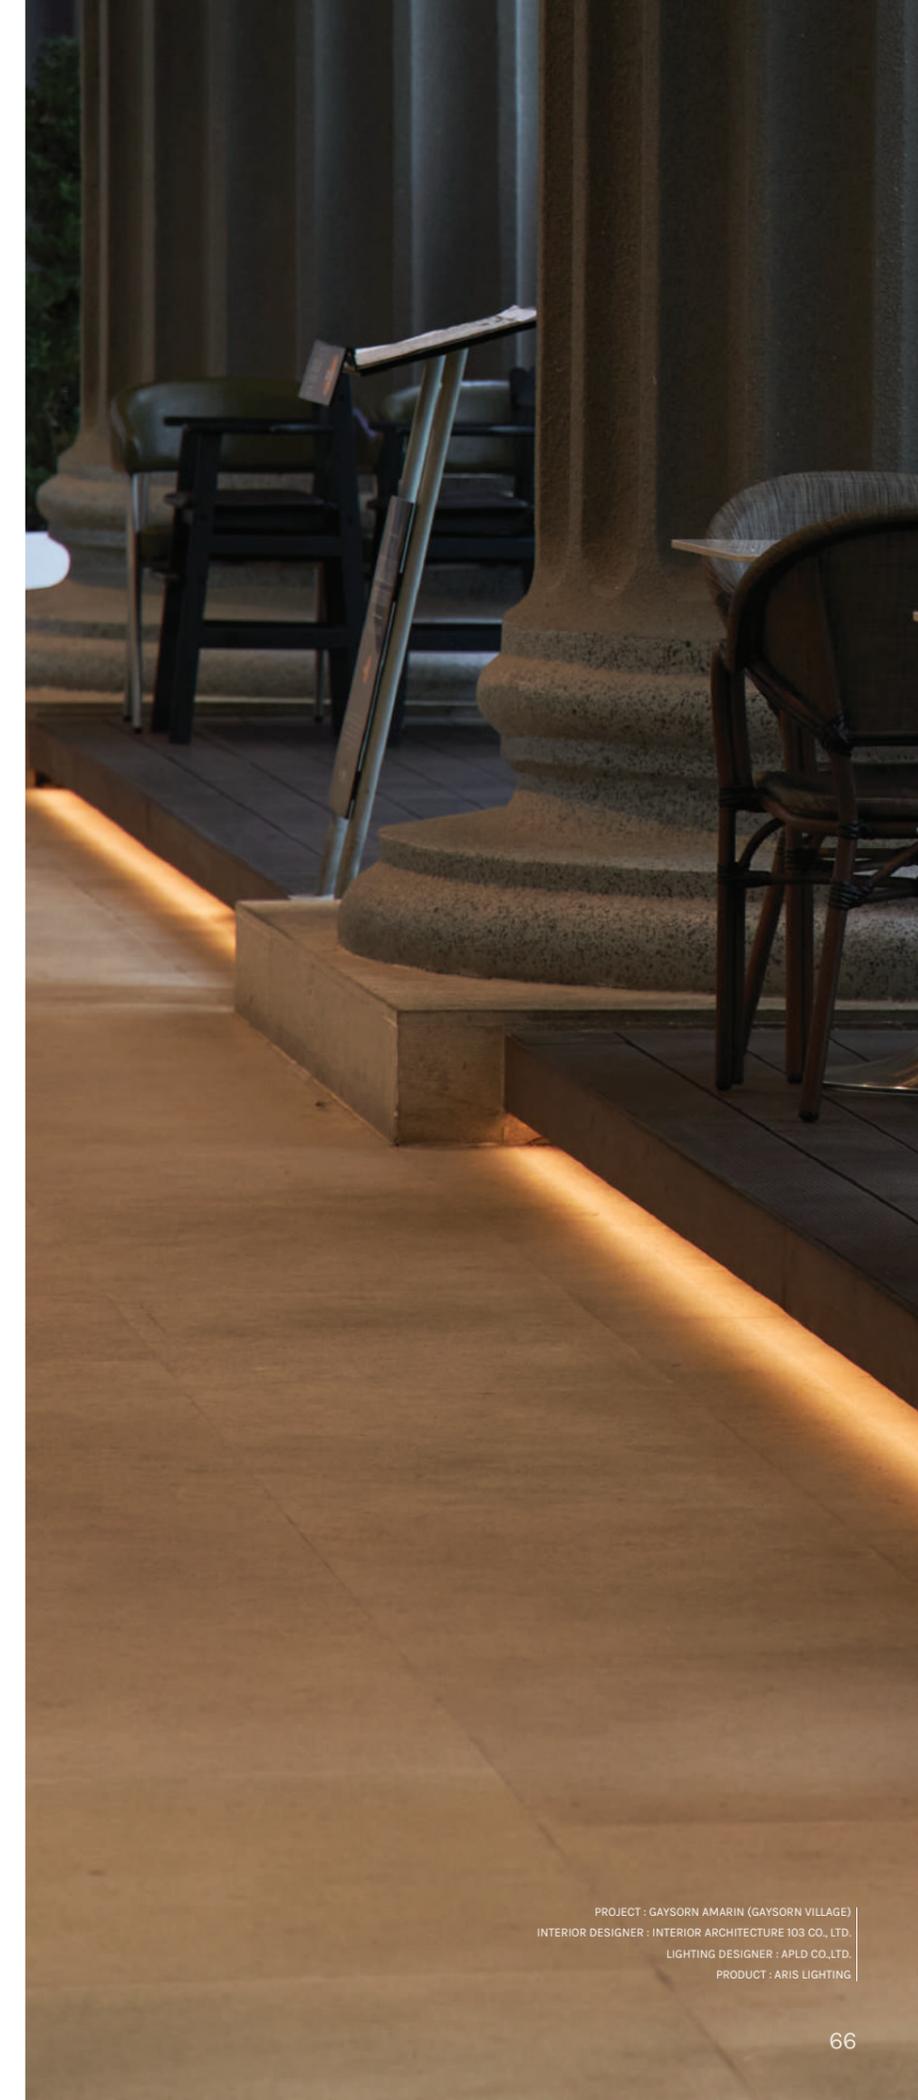

iA SERIES
LED LINEAR SYSTEM

iA6CS-072-060B
Curve



iA8CU-072-060B
Curve



24VDC STRIPLIGHT

MODEL	iA6CS-072-060B	iA8CU-072-060B
DIMENSION (MM)		
SIZE (MM)	1X6X5000	1.2X10X5000
WATTAGE	7.2W	7.2W
CCT	12300K90BB 2700K90BB 3000K90BB 3500K90BB 4000K90BB 5000K90BB 6500K90BB RGB RGBW	12300K90BB 2700K90BB 3000K90BB 3500K90BB 4000K90BB 5000K90BB 6500K90BB RGB RGBW
BEAM ANGLE	 120°	 120°
CRI	>95	>95
LUMEN OUTPUT	610 @ 4000K	610 @ 4000
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-


iA12CU-3C-120-060G
Curve



iA12CU-4C-126-060G
Curve



MODEL	iA12CU-3C-120-060G	iA12CU-4C-126-060G
DIMENSION (MM)		
SIZE (MM)	2X12X5000	2X12X5000
WATTAGE	12W	12.6W
CCT	RGB	RGB+3000K90BB RGB+4000K90BB RGB+6500K90BB
BEAM ANGLE	 120°	 120°
CRI	>95	>95
LUMEN OUTPUT	435 @ 4000K	410 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX	ON/OFF PHASE 0/1-10V DALI CASAMBI DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-

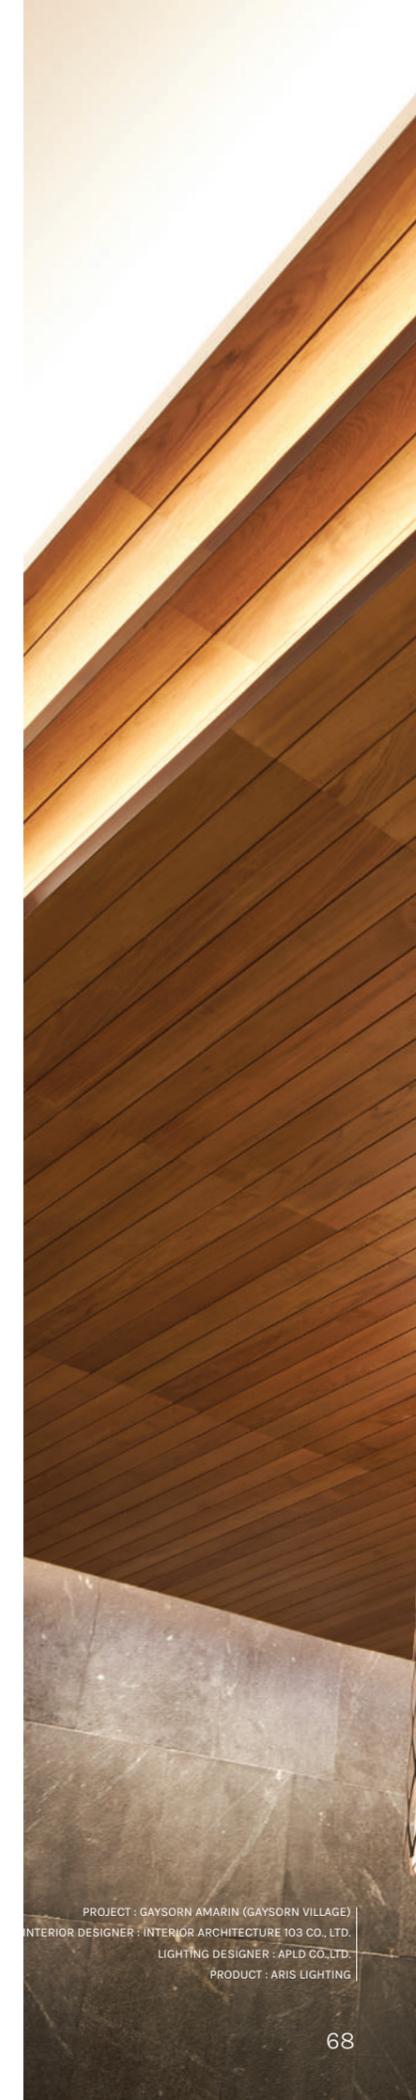

PROJECT : GAYSORN AMARIN (GAYSORN VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO., LTD.
PRODUCT : ARIS LIGHTING


iA SERIES
LED LINEAR SYSTEM

iA16LCS180-096-020B
Lens

iA16L180-2C-144-020B
Lens



24VDC STRIPLIGHT

MODEL	iA16LCS180-096-020B	iA16L180-2C-144-020B
DIMENSION (MM)		
SIZE (MM)	1.2X10X5000	6.5X16X4800
WATTAGE	9.6W	14.4W
CCT	1800K90BB	1800K90BB
	2300K90BB	2300K90BB
	2700K95BB	2700K95BB
	3000K95BB	3000K95BB
	3500K95BB	3500K95BB
	4000K95BB	4000K95BB
	5000K95BB	5000K95BB

BEAM ANGLE	 120°	 120°
CRI	>95	>95
LUMEN OUTPUT	- @ ALL	1224 @ 4000K
IP	IP20	IP20
DIMMING	ON/OFF	ON/OFF
	PHASE	PHASE
	0/1-10V	0/1-10V
	DALI	DALI
	CASAMBI	CASAMBI
	DMX	DMX
COLOR	-	-
ACCESSORY	-	-
OPTICAL ACCESSORY	-	-






ALUMINIUM PROFILE


iPRO+ SERIES

iPRO+ SERIES


REGULAR PROFILE




iPS0607




iPS0808




iP04RC-1107




iP05CN-1010C




iP05SQ-0808H



iP05SA-0808D




iP05TR-0808H-1



iP05SA-0808D-1

iPRO+ SERIES


REGULAR PROFILE




iPB08SQ-1212




iP08RU-1010A




iP10SQ-1214




iP10RC-2515D




iP12FL-1707D-R



iP12SQ-1715B




iP13FL-1610B




iP13CN-1616A

iPRO+ SERIES


REGULAR PROFILE




iP13SQ-1616I




iP13RC-2616




iP05TR-0808H-1




iP20RO-3030




iP13SA-1616D



iP13SA-1616D-1




iP20SQ-3030H



iP13SA-1616D-1

iPRO+ SERIES


DEEP RECESSED ANTI-GLARE




iPD12SQ-1817

iPRO+ SERIES


BEAM-CONTROLLABLE LENS




iPBA12FL-2611-60D




iPBA12SA-2611-45D/25




iPBA12FL-4315-40D




iPBA12FL-4315-60D




iPBA12FL-4315-90D



iPBA12FA-4315-40D/30




iPBA12FA-4315-2x30D/30




iPBA08SQ-12810-1

iPRO+ SERIES


BEAM-CONTROLLABLE LENS



iPBA08SQ-12810-35D




iPBA08SQ-12810-55D




iPBA08SA-12810-50D/25

iPRO+ SERIES

RECESSED CEILING SLOT




iPC13-8639-60D

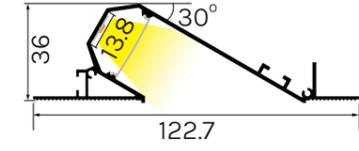


iPC13-12241-30D

iPRO+ SERIES


20MM+ LARGE PROFILE




iPL-3535F




iPL-4235




iPL-5050



iPL-5035K




iPL-5070




iPL-10035

iPRO+ SERIES


20MM+ LARGE PROFILE




iPL-8090



iPL-8090B




iPL-10075



iPL-6080

iPRO+ SERIES


RECESSED FLOOR PROFILE




iPW-3155C

iPRO+ SERIES


FABRIC PROFILE




iPF-4537



iPF-5235




iPF-5245




iPF-7245

iPRO+ SERIES
LED LINEAR SYSTEM


iP04S-0607
REGULAR PROFILE




iP04RU-0808
REGULAR PROFILE



iP04RC-1107
REGULAR PROFILE



iP05CN-1010C
REGULAR PROFILE



ALUMINIUM PROFILE
MODEL

iP04S-0607




iP04RU-0808

iP04RC-1107

iP05CN-1010C



INSTALLATION

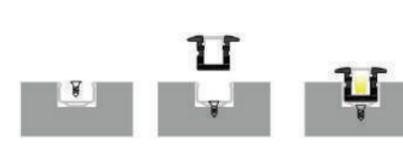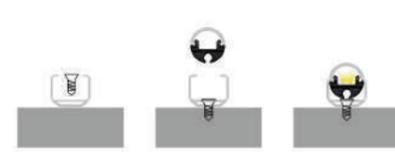

COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



CLIP
COLOR : SILVER




CLIP
COLOR : SILVER



CLIP
COLOR : SILVER




CLIP
COLOR : SILVER

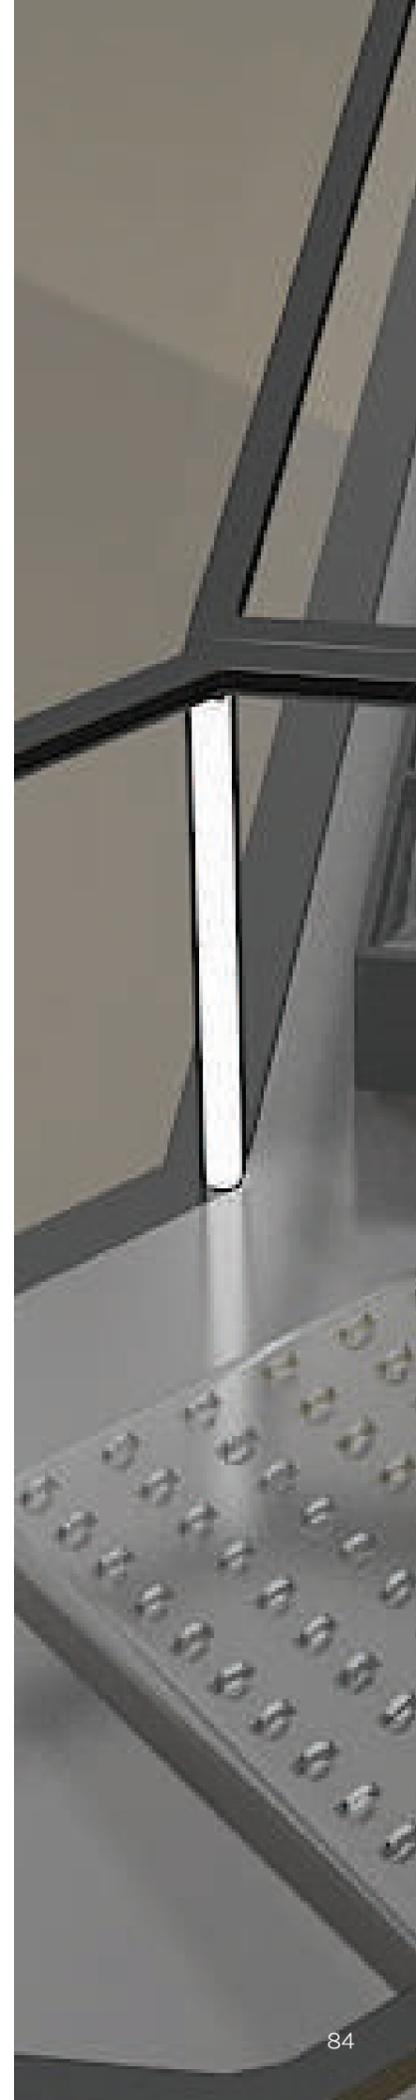


iPRO+ SERIES
LED LINEAR SYSTEM


iP05SQ-0808H
REGULAR PROFILE




iP05SA-0808D
REGULAR PROFILE



iP05TR-0808H-1
REGULAR PROFILE



iP05SA-0808D-1
REGULAR PROFILE



ALUMINIUM PROFILE
MODEL

iP05SQ-0808H



iP05SA-0808D-1



INSTALLATION



COLOR



SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

iP05TR-0808H-1



iP05SA-0808D-1

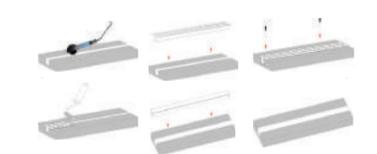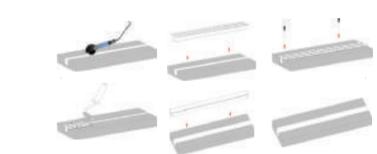

SILVER
BLACK
WHITE


SILVER
BLACK
WHITE

ACCESSORY



iPRO+ SERIES
LED LINEAR SYSTEM


iPB08SQ-1212
REGULAR PROFILE




iP08RU-1010A
REGULAR PROFILE



iP10SQ-1214
REGULAR PROFILE



iP10RC-2515D
REGULAR PROFILE



ALUMINIUM PROFILE
MODEL

iPB08SQ-1212


iP08RU-1010A

iP10SQ-1214

iP10RC-2515D



INSTALLATION



COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK , GOLD



ALUM CASE
COLOR : SILVER , WHITE , BLACK , GOLD



ALUMINUM CASE / WITH HOLE
COLOR : SILVER



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,
OPAL , DIFFUSER , BLACK



HEAT SINK
COLOR : SILVER



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



MAGNETIC LIVE
END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



MINI STRIP CONNECTOR
COLOR : TRANSPARENT



CLIP
COLOR : TRANSPARENT



PENDANT
COLOR : SILVER




CLIP
COLOR : SILVER




MINI STRIP CONNECTOR
COLOR : TRANSPARENT

iPRO+ SERIES
LED LINEAR SYSTEM


iP12FL-1707D-R
REGULAR PROFILE




iP12SQ-1715B
REGULAR PROFILE



iP13FL-1610B
REGULAR PROFILE



iP13CN-1616A
REGULAR PROFILE



ALUMINIUM PROFILE
MODEL

iP12FL-1707D-R



iP12SQ-1715B






iP13FL-1610B



iP13CN-1616A



INSTALLATION

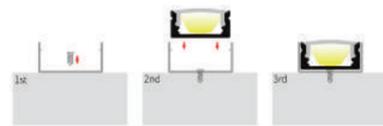

COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE


SILVER
BLACK
WHITE

ACCESSORY




iPRO+ SERIES
LED LINEAR SYSTEM


iP13SQ-1616I
REGULAR PROFILE




iP13RC-2616
REGULAR PROFILE



iP05TR-0808H-1
REGULAR PROFILE



iP20RO-3030
REGULAR PROFILE




ALUMINIUM PROFILE
MODEL


iP13SQ-1616I



iP13RC-2616

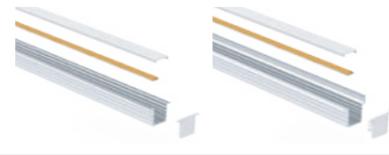



iP05TR-0808H-1

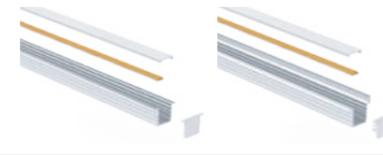

iP20RO-3030



INSTALLATION



COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



ALUMINUM CASE / WITH HOLE
COLOR : SILVER



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



MINI STRIP CONNECTOR
COLOR : TRANSPARENT



CLIP
COLOR : SILVER



MINI STRIP CONNECTOR
COLOR : TRANSPARENT



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



MINI STRIP CONNECTOR
COLOR : TRANSPARENT




PENDANT
COLOR : SILVER




iPRO+ SERIES
LED LINEAR SYSTEM


iP13SA-1616D
REGULAR PROFILE




iP13SA-1616D-1
REGULAR PROFILE



iP20SQ-3030H
REGULAR PROFILE



iP13SA-1616D-1
REGULAR PROFILE



ALUMINIUM PROFILE
MODEL


iP13SA-1616D



iP13SA-1616D-1



iP20SQ-3030H




iP13SA-1616D-1




INSTALLATION

PENDENT




PENDENT



SURFACE MOUNTED



PENDENT

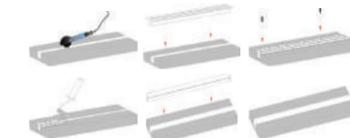

COLOR

SILVER

BLACK

WHITE

SILVER

BLACK

WHITE

SILVER

BLACK


WHITE

SILVER

BLACK


WHITE

ACCESSORY

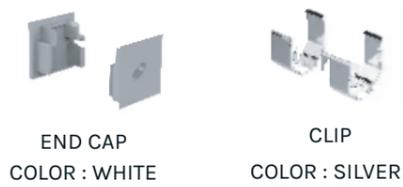


iPRO+ SERIES
LED LINEAR SYSTEM


iPD12SQ-1817
Deep Recessed Anti-glare




iPBA12FL-2611-60D
BEAM-CONTROLLABLE LENS



iPBA12SA-2611-45D/25
BEAM-CONTROLLABLE LENS



iPBA12FL-4315-40D
BEAM-CONTROLLABLE LENS



ALUMINIUM PROFILE
MODEL

iPD12SQ-1817





iPBA12FL-2611-60D

iPBA12SA-2611-45D/25

iPBA12FL-4315-40D



INSTALLATION



COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



PENDANT
COLOR : SILVER



ALUMINUM CASE / WITH HOLE
COLOR : SILVER



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



CLIP
COLOR : SILVER



MINI STRIP CONNECTOR
COLOR : TRANSPARENT



ALUMINUM CASE / WITH HOLE
COLOR : SILVER



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



CLIP
COLOR : SILVER



MINI STRIP CONNECTOR
COLOR : TRANSPARENT



ALUMINUM CASE / WITH HOLE
COLOR : SILVER, WHITE, BLACK



COVER
COLOR : TRANSPARENT




END CAP
COLOR : SILVER, WHITE, BLACK



CLIP
COLOR : SILVER




PENDANT KIT
COLOR : SILVER

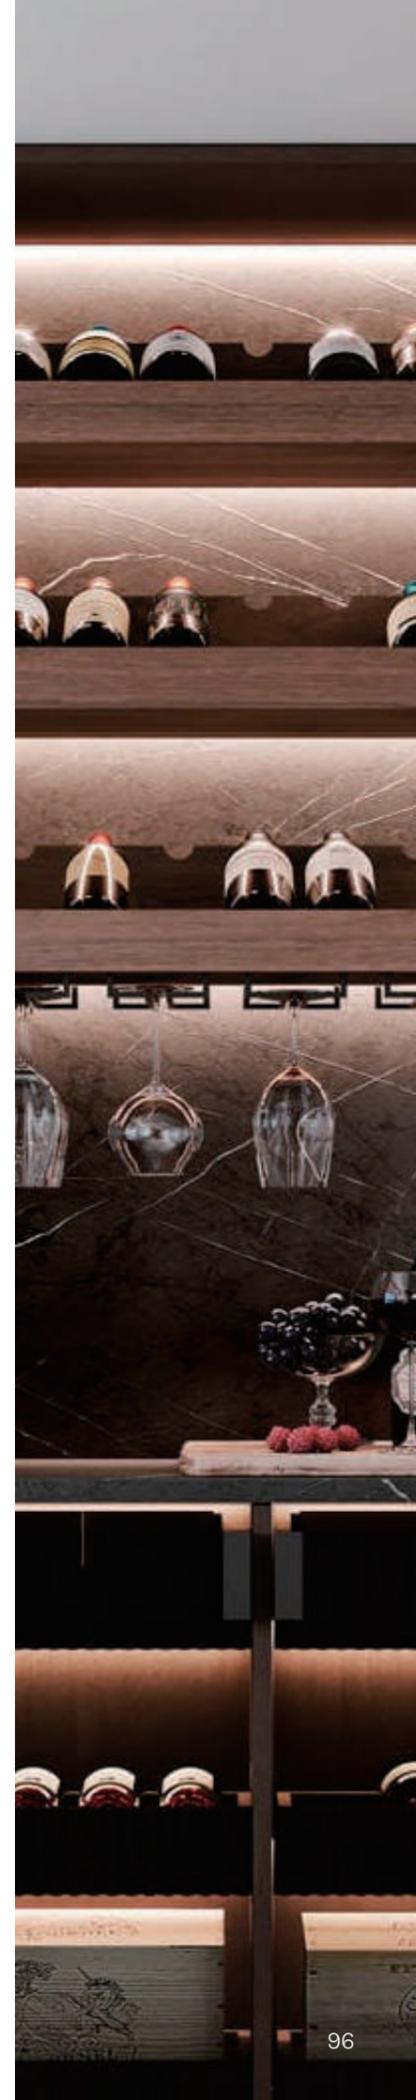


iPRO+ SERIES
LED LINEAR SYSTEM


iPBA12FL-4315-60D
BEAM-CONTROLLABLE LENS




iPBA12FL-4315-90D
BEAM-CONTROLLABLE LENS



iPBA12FA-4315-40D/30
BEAM-CONTROLLABLE LENS



iPBA12FA-4315-2x30D/30
BEAM-CONTROLLABLE LENS



ALUMINIUM PROFILE
MODEL

iPBA12FL-4315-60D





iPBA12FL-4315-90D

iPBA12FA-4315-40D/30

iPBA12FA-4315-2x30D/30



INSTALLATION



COLOR


SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY

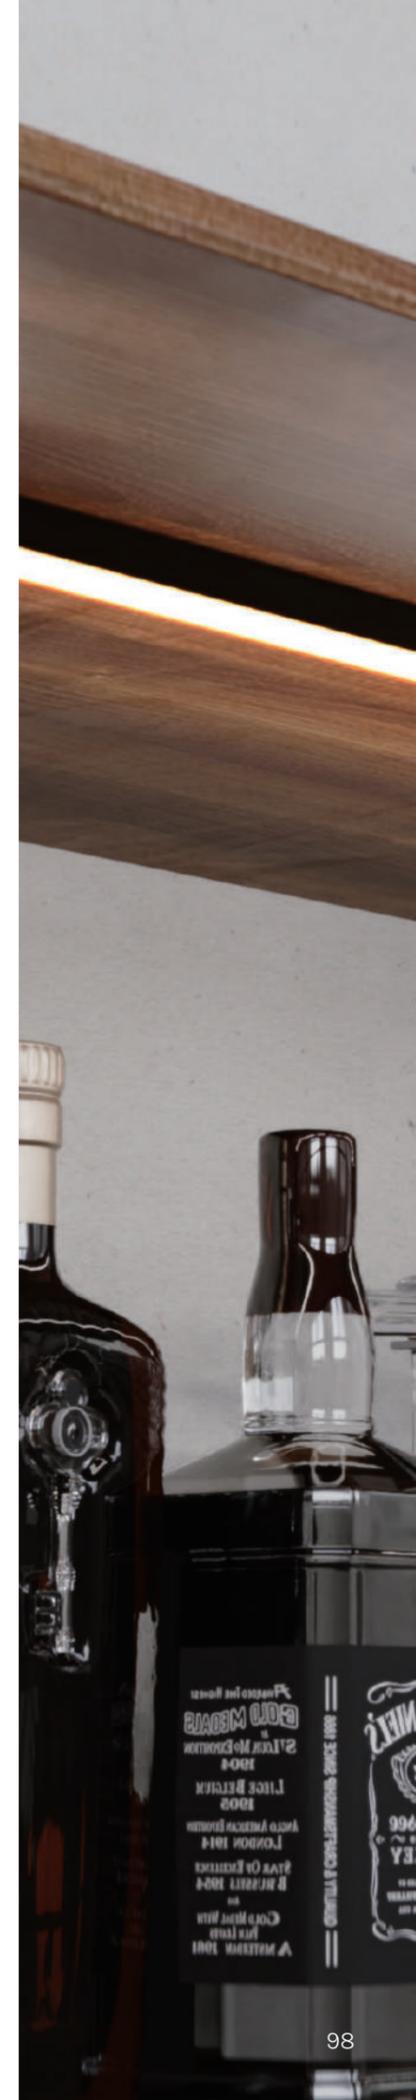


iPRO+ SERIES

LED LINEAR SYSTEM
iPBA08SA-12810-50D/25


iPBA08SQ-12810-1

BEAM-CONTROLLABLE LENS




iPBA08SQ-12810-35D

BEAM-CONTROLLABLE LENS




iPBA08SQ-12810-55D

BEAM-CONTROLLABLE LENS



iPBA08SA-12810-50D/25

BEAM-CONTROLLABLE LENS



ALUMINIUM PROFILE


MODEL

iPBA08SQ-12810-1





iPBA08SQ-12810-35D

iPBA08SQ-12810-55D

iPBA08SA-12810-50D/25



INSTALLATION



COLOR

SILVER

SILVER

SILVER

SILVER

BLACK

BLACK

BLACK

BLACK

WHITE

WHITE

WHITE

WHITE

ACCESSORY



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



COVER
COLOR : TRANSPARENT



COVER
COLOR : TRANSPARENT



COVER
COLOR : TRANSPARENT



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



END CAP
COLOR : WHITE



CLIP
COLOR : SILVER



CLIP
COLOR : SILVER



CLIP
COLOR : SILVER




CLIP
COLOR : SILVER




iPRO+ SERIES
LED LINEAR SYSTEM


iPC13-8639-60D
RECESSED CEILING SLOT




iPC13-12241-30D
RECESSED CEILING SLOT

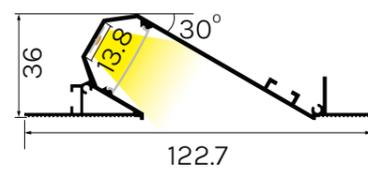

iPL-3535F
20MM+ LARGE PROFILE



iPL-4235
20MM+ LARGE PROFILE



ALUMINIUM PROFILE
MODEL

iPC13-8639-60D



iPC13-12241-30D






iPL-3535F



iPL-4235



INSTALLATION

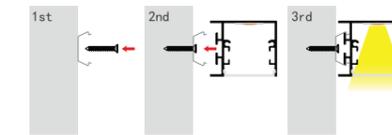

COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : SILVER , WHITE , BLACK



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT , OPAL , DIFFUSER , BLACK



END CAP
COLOR : WHITE



CLIP
COLOR : SILVER



PENDANT
COLOR : SILVER



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE




CLIP
COLOR : SILVER




iPRO+ SERIES
LED LINEAR SYSTEM


iPL-5050
20mm+ Large Profile




iPL-5035K
20mm+ Large Profile



iPL-5070
20mm+ Large Profile



iPL-10035
20mm+ Large Profile



ALUMINIUM PROFILE
MODEL

iPL-5050



iPL-5035K





iPL-5070



iPL-10035



INSTALLATION

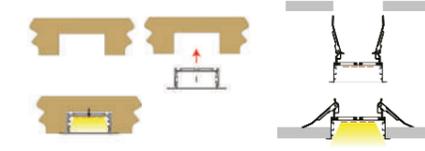

COLOR


SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE


SILVER
BLACK
WHITE

ACCESSORY




iPRO+ SERIES
LED LINEAR SYSTEM


iPL-8090
20mm+ Large Profile



iPL-8090B
20mm+ Large Profile



iPL-10075
20mm+ Large Profile



ALUMINIUM PROFILE
MODEL




iPL-8090

iPL-8090B

iPL-10075



INSTALLATION



COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



COVER
COLOR : DIFFUSER , STREAK , BLACK



END CAP
COLOR : WHITE



PENDANT
COLOR : SILVER



FASTENER
COLOR : SILVER



COVER
COLOR : SMOOTH , BLACK



END CAP
COLOR : WHITE



PENDANT
COLOR : SILVER



FASTENER
COLOR : SILVER



COVER
COLOR : DIFFUSER , STREAK , BLACK



END CAP
COLOR : WHITE





PENDANT
COLOR : SILVER



iPRO+ SERIES
LED LINEAR SYSTEM

iPL-6080
20mm+ Large Profile

iPW-3155C
RECESSED FLOOR PROFILE




ALUMINIUM PROFILE



MODEL

iPL-6080

iPW-3155C



INSTALLATION

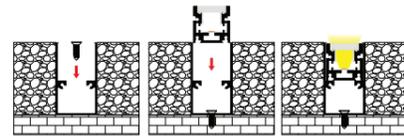

COLOR

SILVER

SILVER

BLACK

BLACK

WHITE

WHITE

ACCESSORY



COVER
COLOR : DIFFUSER , BLACK



END CAP
COLOR : WHITE



FIXING PART
IN ALUMINIUM CASE
COLOR : SILVER



ALUMINIUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT ,
OPAL , DIFFUSER , BLACK



WIRING TRACK SLOT
COLOR : SILVER



END CAP
WATERPROOF RING



WATERPROOF PG
COLOR : SILVER



END CAP (HOLE)
COLOR : WHITE




SILICONE ARTICLE
COLOR : TRANSPARENT




iPRO+ SERIES
LED LINEAR SYSTEM


iPF-4537
FABRIC PROFILE




iPF-5235
FABRIC PROFILE



iPF-5245
FABRIC PROFILE



iPF-7245
FABRIC PROFILE



ALUMINIUM PROFILE
MODEL

iPF-4537





iPF-5235

iPF-5245

iPF-7245



INSTALLATION

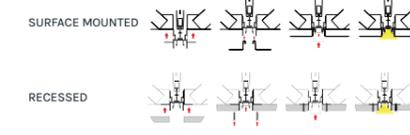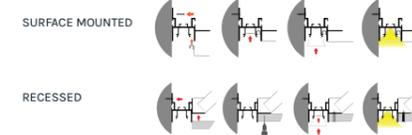

COLOR

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

SILVER
BLACK
WHITE

ACCESSORY



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



END CAP
COLOR : WHITE



ALUMINUM CASE
COLOR : SILVER , WHITE , BLACK



COVER
COLOR : TRANSPARENT,OPAL,DIFFUSER,BLACK



MOUNTING BRACKET
COLOR : SILVER



END CAP
COLOR : WHITE



SUSPENDED
MOUNTING BRACKET



PROJECT : LIANA RESTAURANT
INTERIOR DESIGNER : MAAT
LIGHTING DESIGNER : LIGHTIS.STUDIO
PRODUCT : IA SERIES , IN SERIES , ROME SERIES , CASAMBI



← เกษมณีนันท์
Gayson Amarin

ไอราวิน บาง
ไอราวิน บาง
ไอราวิน บาง

ไอราวิน บาง
ไอราวิน บาง

ไอราวิน บาง
ไอราวิน บาง

↑

PROJECT : GAYSON AMARIN (GAYSON VILLAGE)
INTERIOR DESIGNER : INTERIOR ARCHITECTURE 103 CO., LTD.
LIGHTING DESIGNER : APLD CO.,LTD.
PRODUCT : ARIS LIGHTING